



6.0 TREND MICRO™ Control Manager Service Pack 1 Administrator's Guide

Centralized Security Management for the Enterprise

Trend Micro Incorporated reserves the right to make changes to this document and to the products described herein without notice. Before installing and using the software, please review the readme files, release notes, and the latest version of the applicable user documentation, which are available from the Trend Micro website at:

<http://docs.trendmicro.com/en-us/enterprise/control-manager.aspx>

Trend Micro, the Trend Micro t-ball logo, OfficeScan, Control Manager, Damage Cleanup Services, eManager, InterScan, Network VirusWall, ScanMail, ServerProtect, and TrendLabs are trademarks or registered trademarks of Trend Micro Incorporated. All other product or company names may be trademarks or registered trademarks of their owners.

Copyright © 2014 Trend Micro Incorporated. All rights reserved.

Document Part No.: CMEM66343/140310

Release Date: April 2014

Protected by U.S. Patent No. 5,623,600; 5,889,943; 5,951,698; 6,119,165

The user documentation for Trend Micro Control Manager introduces the main features of the software and installation instructions for your production environment. Read through it before installing or using the software.

Detailed information about how to use specific features within the software are available in the online help file and the online Knowledge Base at Trend Micro's website.

Trend Micro always seeks to improve its documentation. If you have questions, comments, or suggestions about this or any Trend Micro document, please contact us at docs@trendmicro.com.

Please evaluate this documentation on the following site:

<http://www.trendmicro.com/download/documentation/rating.asp>

Table of Contents

Preface

Preface	xi
What's New in This Version	xii
Control Manager 6.0 Service Pack 1 Service Pack 1 (SP1) Features and Enhancements	xii
Control Manager 6.0 Service Pack 1 Patch 3 Features and Enhancements	xiii
Control Manager 6.0 Service Pack 1 Patch 2 Features and Enhancements	xiv
Control Manager 6.0 Service Pack 1 Features and Enhancements	xv
Control Manager Documentation	xvi
Document Conventions	xvii

Part I: Getting Started

Chapter 1: Introducing Trend Micro Control Manager

Control Manager Standard and Advanced	1-3
Introducing Control Manager Features	1-3
Understanding Trend Micro Management Communication Protocol ...	1-5
Control Manager Architecture	1-9
Trend Micro Smart Protection Network	1-11

Chapter 2: Getting Started with Control Manager

Using the Management Console	2-2
Understanding the Function-Locking Mechanism	2-4
Accessing the Management Console	2-4

Changing Access to the Management Console	2-6
Configuring Web Console Settings	2-7
Configuring Command Time-out Settings	2-8
Logging Off from the Management Console	2-9

Chapter 3: Configuring User Access

Understanding User Access	3-2
Understanding User Roles	3-3
Understanding User Accounts	3-15
Understanding User Groups	3-26

Chapter 4: User/Endpoint Directory Basics

Understanding the User/Endpoint Directory	4-2
Understanding the Active Directory Synchronization	4-15
Searching for Users or Endpoints	4-20
Understanding Custom Tags and Filters	4-24
Working with Custom Tags	4-26
Working with Custom Filters	4-29

Chapter 5: Product Directory Basics

Understanding the Product Directory	5-2
Grouping Managed Products Using Directory Management	5-3
Understanding Cascading Management	5-9

Chapter 6: Working with Managed Servers

Understanding Managed Servers	6-2
Adding a Server	6-3
Editing a Server	6-5
Deleting a Server	6-5

Configuring Proxy Settings for Managed Products	6-6
Configuring the Cloud Service Settings	6-7
Stop Managing Cloud Services	6-10

Chapter 7: Downloading and Deploying Components

Downloading and Deploying New Components	7-2
Manually Downloading Components	7-4
Understanding Scheduled Download Exceptions	7-11
Configuring Scheduled Downloads	7-12
Understanding Deployment Plans	7-23
Configuring the Proxy Settings for Component Updates	7-28
Configuring Update/Deployment Settings	7-29

Part II: Monitoring the Control Manager Network

Chapter 8: Working with the Dashboard and Widgets

Using the Dashboard	8-2
Understanding Tabs	8-2
Understanding Widgets	8-9
Configuring Smart Protection Network Settings	8-27
Configuring Deep Security Management Server Connection Settings	8-28

Chapter 9: Using Command Tracking

Understanding Command Tracking	9-2
Querying and Viewing Commands	9-4

Chapter 10: Using Notifications

Understanding Event Center	10-2
Customizing Notification Messages	10-6
Enabling or Disabling Notifications	10-11
Understanding Notification Methods	10-12
Configuring Notification Recipients and Testing Notification Delivery	10-16
Configuring Alert Settings	10-18
Configuring Data Loss Prevention Settings	10-24

Chapter 11: Working with Logs

Using Logs	11-2
Understanding Log Aggregation	11-4
Querying Log Data	11-5

Chapter 12: Working with Reports

Understanding Reports	12-2
Understanding Control Manager Report Templates	12-2
Adding Custom Templates	12-15
Understanding One-time Reports	12-30
Understanding Scheduled Reports	12-36
Viewing Generated Reports	12-43
Configuring Report Maintenance	12-44
Understanding My Reports	12-45

Part III: Administering Control Manager

Chapter 13: MCP and Control Manager Agents

Understanding Agents	13-2
Understanding Control Manager Security Levels	13-6
Using the Agent Communication Schedule	13-8
Understanding the Agent/Communicator Heartbeat	13-9
Configuring Agent Communication Schedules	13-12
Configuring the Agent Communicator or Managed Server Heartbeat	13-14
Stopping and Restarting Control Manager Services	13-16
Modifying the Control Manager External Communication Port	13-16
Verifying the Communication Method Between MCP and Control Manager	13-19
Understanding Control Manager Agent Remote Installation	13-21

Chapter 14: Administering Managed Products

Manually Deploying Components Using the Product Directory	14-2
Viewing Status Summaries for Managed Products	14-3
Configuring Managed Products	14-4
Understanding the Directory Management Screen	14-13

Chapter 15: Activating Control Manager and Managed Products

Activating and Registering Managed Products	15-2
Understanding License Management	15-2
About Activating Control Manager	15-7

Chapter 16: Managing Child Servers

Understanding Parent-Child Communication	16-2
Registering or Unregistering Child Servers	16-3
Accessing the Cascading Folder	16-7

Viewing Child Server Status Summaries	16-7
Configuring Log Upload Settings	16-8
Issuing Tasks to Child Servers	16-10
Viewing Child Server Reports	16-12
Renaming a Child Server	16-13
Removing Child Servers Accidentally Removed from the Cascading Manager	16-14

Chapter 17: Policy Management

Understanding Policy Management	17-2
Updating the Policy Templates	17-18
Understanding Data Loss Prevention	17-20

Chapter 18: Investigating Data Loss Prevention Incidents

Administrator Tasks	18-2
DLP Incident Review Process	18-7

Chapter 19: Administering the Database

Understanding the Control Manager Database	19-2
Backing Up db_ControlManager Using osql	19-8
Backing Up db_ControlManager Using SQL Server Management Studio	19-10
Shrinking db_ControlManager_Log.LDF Using SQL Commands ...	19-13
Shrinking db_ControlManager_log.ldf Using SQL Server Management Studio	19-14

Part IV: Services and Tools

Chapter 20: Using Trend Micro Services

Understanding Trend Micro Services	20-2

Understanding Enterprise Protection Strategy	20-3
Understanding Outbreak Prevention Services	20-5
Preventing Virus Outbreaks and Understanding Outbreak Prevention Mode	20-8
Using Outbreak Prevention Mode	20-18

Chapter 21: Using Control Manager Tools

Using Agent Migration Tool (AgentMigrateTool.exe)	21-2
Using the Control Manager MIB File	21-2
Using the NVW Enforcer SNMPv2 MIB File	21-3
Using the DBConfig Tool	21-3

Part V: Removing Control Manager and Contacting Support

Chapter 22: Removing Trend Micro Control Manager

Removing a Control Manager Server	22-2
Manually Removing Control Manager	22-3
Removing a Windows-Based Control Manager 2.x Agent	22-10

Chapter 23: Getting Support

Before Contacting Technical Support	23-2
Contacting Technical Support	23-2
TrendLabs	23-3
Other Useful Resources	23-3

Appendices

Appendix A: Control Manager System Checklists

Server Address Checklist	A-2
Ports Checklist	A-3
Control Manager 2.x Agent Installation Checklist	A-4
Control Manager Conventions	A-5
Core Process and Configuration Files	A-5
Communication and Listening Ports	A-8
Control Manager Product Version Comparison	A-9

Appendix B: Data Views

Data Views: Product Information	B-3
Data View: Security Threat Information	B-18
Data View: Data Protection Information	B-89

Appendix C: IPv6 Support in Control Manager

Control Manager Server Requirements	C-2
IPv6 Server Limitations	C-2
Configuring IPv6 Addresses	C-2
Screens That Display IP Addresses	C-3

Appendix D: Checking Policy Status

Policy Status	D-2

Appendix E: Templates for Policy Management

Deep Discovery Inspector Product Settings	E-2
IMSVa Product Settings	E-9
OfficeScan Client Settings	E-15
OfficeScan DLP Settings	E-113
ScanMail for Microsoft Exchange Product Settings	E-127

Trend Micro Security for Mac Product Settings E-131

Endpoint Encryption Product Settings E-174

Mobile Security Product Settings E-193

IWSVA Rules E-224

Index

Index IN-1

Preface

Preface

This Administrator's Guide introduces Trend Micro™ Control Manager™ 6.0 Service Pack 1 and walks you through configuring Control Manager to function according to your needs.

This preface contains the following topics:

- *What's New in This Version on page xii*
- *Control Manager Documentation on page xvi*
- *Document Conventions on page xvii*

What's New in This Version

This section lists the new features and enhancements available in each release.

Control Manager 6.0 Service Pack 1 Service Pack 1 (SP1) Features and Enhancements

Control Manager 6.0 Service Pack 1 SP1 provides the following new features and enhancements:

FEATURE	DESCRIPTION
User/Endpoint Directory on page 4-2	The User/Endpoint Directory is a graphical representation of the organization of your Control Manager network. This directory allows you to organize your network into groups of users or endpoints with custom or predefined criteria. The following functionalities are now possible: • User view with Security Threat, Policy Status, and Contact Information • Endpoint view with Policy Status • Basic or advanced user/endpoint search • Custom filters to automatically group users/endpoints • Custom tags to manually group users/endpoints based on specific criteria • Active Directory integration and display of available structure  Important Control Manager supports synchronization of Active Directory domains coming from the same forest.
Hosts with C&C Callback Attempts widget on page 8-15	This widget provides information about hosts that attempt to establish connection with known C&C servers.

FEATURE	DESCRIPTION
<i>Manage cloud-based services on page 6-2</i>	In addition to products offering endpoint or server protection, you can now include supported Trend Micro SaaS solutions in the Control Manager managed servers list. The following functionalities are now possible: • Access and configure any of the managed SaaS solutions through Control Manager using single sign-on • You can, at any time, stop managing any registered SaaS solutions

Control Manager 6.0 Service Pack 1 Patch 3 Features and Enhancements

New features and enhancements related to the Command-and-Control Contact Alert (CCCA) service are available in version 6.0 Service Pack 1 Patch 3.

FEATURE	DESCRIPTION
Widgets	• C&C Callback Events • Unique Compromised Hosts Over Time
Notifications	• C&C callback alert • C&C callback outbreak alert
Logs	C&C Callback Information data view available under Security Threat Information
Components	Patterns available for updates: • C&C Information Pattern • Advanced Malware Pattern

Control Manager 6.0 Service Pack 1 Patch 2 Features and Enhancements

The following new features and enhancements are available in version 6.0 Service Pack 1 Patch 2.

FEATURE	DESCRIPTION
User roles	DLP user roles available for DLP incident investigation: • DLP Compliance Officer • DLP Incident Reviewer
Notifications	DLP notifications available for DLP incident investigation: • Scheduled incident summary • Incident details updated
DLP template severity levels	Visible DLP template severity levels: • High • Medium • Low • Informational • Undefined
DLP incident investigation	• DLP dashboard widgets available for monitoring and reviewing DLP incidents based on severity levels and managed users • View a summary list of DLP incidents triggered by managed users • Review and update incident detailed information
DLP auditing logs	Export DLP auditing logs

Control Manager 6.0 Service Pack 1 Features and Enhancements

The following new features and enhancements are available in version 6.0 Service Pack 1.

FEATURE	DESCRIPTION
Policy management	• Deploy product settings to managed products using policies • Flexible policy types • Role-based administration • Easy policy template updates from the web console
Policy status dashboard widget	• Up-to-date deployment status of product settings • Monitor the numbers of deployed and pending targets • Check the detailed status of the pending targets
Policy template updates	When new or updated templates become available, administrators can easily perform the update from the web console.
Data Loss Prevention (DLP) integration	DLP is a feature of the Data Protection module that monitors the transmission of digital assets. The DLP feature can minimize the risk of information loss and improve visibility of data usage patterns and risky business processes. Control Manager has integrated the following DLP features: • Manageable DLP templates and data identifiers • Deploy DLP settings to managed products using policy management, DLP templates, and data identifiers • Collect DLP logs for reports and event notifications • 22 pre-defined DLP report templates • Five DLP event notifications • Four dashboard widgets • Product support: OfficeScan, IMSVA, and ScanMail for Microsoft Exchange

FEATURE	DESCRIPTION
Favorites	Administrators can add menu shortcuts to the Favorites menu for quick access.

Control Manager Documentation

This documentation assumes a basic knowledge of security systems. There are references to previous versions of Control Manager to help system administrators and personnel who are familiar with earlier versions of the product. If you have not used earlier versions of Control Manager, the references may help reinforce your understanding of the Control Manager concepts.

TABLE 1. Control Manager Documentation

DOCUMENT	DESCRIPTION
Online Help	Web-based documentation that is accessible from the Control Manager web console. The online help contains explanations of Control Manager components and features, as well as procedures needed to configure Control Manager.
Trend Micro Online Help Center (http://docs.trendmicro.com)	The Trend Micro Online Help Center provides the latest product documentation.
Readme file	The Readme file contains late-breaking product information that is not found in the online or printed documentation. Topics include a description of new features, known issues, and product release history.
Installation Guide	PDF documentation is accessible from the Trend Micro Enterprise DVD or downloadable from the Trend Micro website. The Installation Guide contains detailed instructions of how to install Control Manager and configure basic settings to get you "up and running".

DOCUMENT	DESCRIPTION
Administrator's Guide	PDF documentation that is accessible from the Trend Micro Solutions DVD for Control Manager or downloadable from the Trend Micro website. The Administrator's Guide contains detailed instructions of how to configure and manage Control Manager and managed products, and explanations on Control Manager concepts and features.
Tutorial	PDF documentation that is accessible from the Trend Micro Solutions DVD for Control Manager or downloadable from the Trend Micro website. The Tutorial contains hands-on instructions of how to deploy, install, configure, and manage Control Manager and managed products registered to Control Manager.

Document Conventions

The documentation uses the following conventions:


TABLE 2. Document Conventions

CONVENTION	DESCRIPTION
UPPER CASE	Acronyms, abbreviations, and names of certain commands and keys on the keyboard
Bold	Menus and menu commands, command buttons, tabs, and options
<i>Italics</i>	References to other documents
Monospace	Sample command lines, program code, web URLs, file names, and program output
Navigation > Path	The navigation path to reach a particular screen For example, File > Save means, click File and then click Save on the interface

CONVENTION	DESCRIPTION
 Note	Configuration notes
 Tip	Recommendations or suggestions
 Important	Information regarding required or default configuration settings and product limitations
 WARNING!	Critical actions and configuration options

Part I

Getting Started

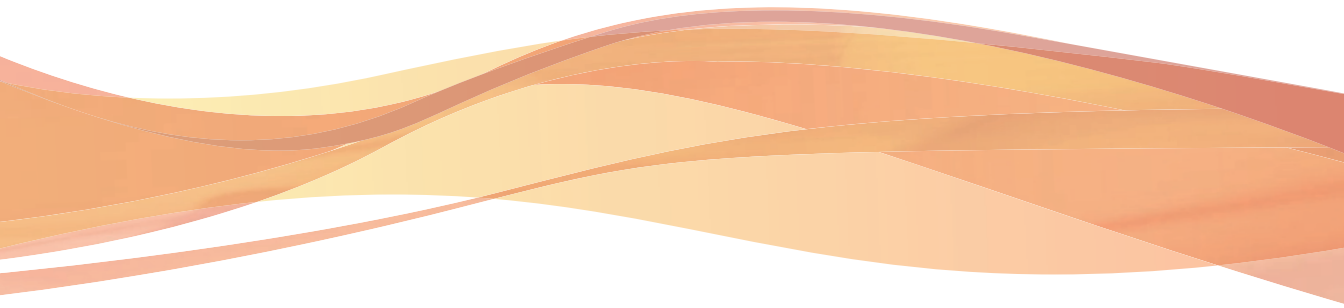

Chapter 1

Introducing Trend Micro™ Control Manager™

Trend Micro Control Manager is a central management console that manages Trend Micro products and services at the gateway, mail server, file server, and corporate desktop levels. Administrators can use the policy management feature to configure and deploy product settings to managed products and endpoints. The Control Manager web-based management console provides a single monitoring point for antivirus and content security products and services throughout the network.

Control Manager enables system administrators to monitor and report on activities such as infections, security violations, or virus/malware entry points. System administrators can download and deploy update components throughout the network, helping ensure that protection is consistent and up to date. Example update components include virus pattern files, scan engines, and anti-spam rules. Control Manager allows both manual and pre-scheduled updates. Control Manager allows the configuration and administration of products as groups or as individuals for added flexibility.

This chapter contains the following topics:

- *Control Manager Standard and Advanced on page 1-3*
- *Introducing Control Manager Features on page 1-3*
- *Understanding Trend Micro Management Communication Protocol on page 1-5*
- *Control Manager Architecture on page 1-9*

- *Trend Micro™ Smart Protection Network™ on page 1-11*

Control Manager Standard and Advanced

Control Manager is available in two versions: Standard and Advanced. Control Manager Advanced includes features that Control Manager Standard does not. For example, Control Manager Advanced supports a cascading management structure. This means the Control Manager network can be managed by a parent Control Manager Advanced server with several child Control Manager Advanced servers reporting to the parent Control Manager Advanced server. The parent server acts as a hub for the entire network.

**Note**

Control Manager Advanced supports the following as child Control Manager servers:

- Control Manager 6.0 Advanced
- Control Manager 5.5 Advanced
- Control Manager 5.0 Advanced

Control Manager 5.0/5.5/6.0 Standard servers cannot be child servers.

For a complete list of all features Standard and Advanced Control Manager servers support see [Control Manager Product Version Comparison on page A-9](#)

Introducing Control Manager Features

Trend Micro designed Control Manager to manage antivirus and content security products and services deployed across an organization's local and wide area networks.

TABLE 1-1. Control Manager Features

FEATURE	DESCRIPTION
Policy management	System administrators can use policies to configure and deploy product settings to managed products and endpoints from a single management console.

FEATURE	DESCRIPTION
Centralized configuration	Using the Product Directory and cascading management structure, these functions allow you to coordinate virus-response and content security efforts from a single management console. These features help ensure consistent enforcement of your organization's virus/malware and content security policies.
Proactive outbreak prevention	With Outbreak Prevention Services (OPS), take proactive steps to secure your network against an emerging virus/malware outbreak.
Secure communication infrastructure	Control Manager uses a communications infrastructure built on the Secure Socket Layer (SSL) protocol. Depending on the security settings used, Control Manager can encrypt messages or encrypt them with authentication.
Secure configuration and component download	These features allow you to configure secure web console access and component download.
Task delegation	System administrators can give personalized accounts with customized privileges to Control Manager web console users. User accounts define what the user can see and do on a Control Manager network. Track account usage through user logs.
Command Tracking	This feature allows you to monitor all commands executed using the Control Manager web console. Command Tracking is useful for determining whether Control Manager has successfully performed long-duration commands, like virus pattern update and deployment.
On-demand product control	Control managed products in real time. Control Manager immediately sends configuration modifications made on the web console to the managed products. System administrators can run manual scans from the web console. This command system is indispensable during a virus/malware outbreak.

FEATURE	DESCRIPTION
Centralized update control	Update virus patterns, antispam rules, scan engines, and other antivirus or content security components to help ensure that all managed products are up to date.
Centralized reporting	Get an overview of the antivirus and content security product performance using comprehensive logs and reports. Control Manager collects logs from all its managed products; you no longer need to check the logs of each individual product.

Understanding Trend Micro Management Communication Protocol

Trend Micro Management Communication Protocol (MCP) agent is the next generation agent for Trend Micro managed products. MCP replaces Trend Micro Management Infrastructure (TMI) as the way Control Manager communicates with managed products. MCP has several features:

- Reduced network loading and package size
- NAT and firewall traversal support
- HTTPS support
- One-way and two-way communication support
- Single sign-on (SSO) support

Reduced Network Loading and Package Size

TMI uses an application protocol based on XML. Even though XML provides a degree of extensibility and flexibility in the protocol design, the drawbacks of applying XML as the data format standard for the communication protocol consist of the following:

- XML parsing requires more system resources compared to other data formats such as CGI name-value pair and binary structure (the program leaves a large footprint on your server or device).

- The agent footprint required to transfer information is much larger in XML compared with other data formats.
- Data processing performance is slower due to the larger data footprint.
- Packet transmissions take longer and the transmission rate is less than other data formats.

MCP's data format is designed to resolve these issues. MCP's data format is a BLOB (binary) stream with each item composed of name ID, type, length, and value. This BLOB format has the following advantages.

TABLE 1-2. BLOB Format Advantages

ADVANTAGE	DESCRIPTION
Smaller data transfer size compared to XML	Each data type requires only a limited number of bytes to store the information. These data types are integer, unsigned integer, Boolean, and floating point.
Faster parsing speed	With a fixed binary format, each data item can be easily parsed one by one. Compared to XML, the performance is several times faster.
Improved design flexibility	Design flexibility has also been considered since each item is composed of name ID, type, length, and value. There will be no strict item order and compliment items can be present in the communication protocol only if needed.

In addition to applying binary stream format for data transmission, more than one type of data can be packed in a connection, with or without compression. With this type of data transfer strategy, network bandwidth can be preserved and improved scalability is also created.

NAT and Firewall Traversal Support

With limited addressable IP addresses on the IPv4 network, NAT (Network Address Translation) devices have become widely used to allow more end-point computers to connect to the Internet. NAT devices achieve this by forming a private virtual network to the computers attached to the NAT device. Each computer that connects to the NAT device will have one dedicated private virtual IP address. The NAT device will

translate this private IP address into a real world IP address before sending a request to the Internet. This introduces some problems since each connecting computer uses a virtual IP and many network applications are not aware of this behavior. This usually results in unexpected program malfunctions and network connectivity issues.

For products that work with Control Manager 2.5/3.0 agents, one pre-condition is assumed. The server relies on the fact that the agent can be reached by initiating a connection from server to the agent. This is a so-called two-way communication product, since both sides can initiate network connection with each other. This assumption breaks when the agent sits behind a NAT device (or the Control Manager server sits behind a NAT device) since the connection can only route to the NAT device, not the product behind the NAT device (or the Control Manager server sitting behind a NAT device). One common work-around is that a specific mapping relationship is established on the NAT device to direct it to automatically route the inbound request to the respective agent. However, this solution needs user involvement and it does not work well when large-scale product deployment is needed.

The MCP deals with this issue by introducing a one-way communication model. With one-way communication, only the agent initiates the network connection to the server. The server cannot initiate connection to the agent. This one-way communication works well for log data transfers. However, the server dispatching of commands occurs under a passive mode. That is, the command deployment relies on the agent to poll the server for available commands.

HTTPS Support

The MCP integration protocol applies the industry standard communication protocol (HTTP/HTTPS). HTTP/HTTPS has several advantages over TMI:

- A large majority of people in IT are familiar with HTTP/HTTPS, which makes it easier to identify communication issues and find solutions those issues
- For most enterprise environments, there is no need to open extra ports in the firewall to allow packets to pass
- Existing security mechanisms built for HTTP/HTTPS, such as SSL/TLS and HTTP digest authentication, can be used

Using MCP, Control Manager has three security levels:

- **Normal security:** Control Manager uses HTTP for communication
- **Medium security:** Control Manager uses HTTPS for communication if HTTPS is supported and HTTP if HTTPS is not supported
- **High security:** Control Manager uses HTTPS for communication

One-Way Communication

NAT traversal has become an increasingly more significant issue in the current, real-world network environment. In order to address this issue, MCP uses one-way communication. One-way communication has the MCP client initiating the connection to and polling of commands from the server. Each request is a CGI-like command query or log transmission. In order to reduce the network impact, the connection is kept alive and open as much as possible. A subsequent request uses an existing open connection. Even if the connection is dropped, all connections involving SSL to the same host benefit from session ID cache that drastically reduces reconnection time.

Two-Way Communication

Two-way communication is an alternative to one-way communication. It is still based on one-way communication, but has an extra channel to receive server notifications. This extra channel is also based on HTTP protocol. Two-way communication can improve real-time dispatching and processing of commands from the server by the MCP agent. The MCP agent side needs a web server or CGI compatible program that can process CGI-like requests to receive notifications from the Control Manager server.

Single Sign-on (SSO) Support

Through MCP, Control Manager supports single sign-on (SSO) functionality for Trend Micro products. This feature allows users to sign in to Control Manager and access the resources of other Trend Micro products without having to sign in to those products as well.

Control Manager Architecture

Trend Micro Control Manager provides a means to control Trend Micro products and services from a central location. This application simplifies the administration of a corporate virus/malware and content security policy. The following table provides a list of components Control Manager uses.

TABLE 1-3. Control Manager Components

COMPONENT	DESCRIPTION
Control Manager server	Acts as a repository for all data collected from the agents. It can be a Standard or Advanced Edition server. A Control Manager server includes the following features: - An SQL database that stores managed product configurations and logs Control Manager uses the Microsoft SQL Server database (<code>db_ControlManager.mdf</code>) to store data included in logs, Communicator schedule, managed product and child server information, user account, network environment, and notification settings. - A web server that hosts the Control Manager web console - A mail server that delivers event notifications through email messages Control Manager can send notifications to individuals or groups of recipients about events that occur on the Control Manager network. Configure Event Center to send notifications through email messages, Windows event log, MSN Messenger, SNMP, Syslog, pager, or any in-house/industry standard application used by your organization to send notification. - A report server, present only in the Advanced Edition, that generates antivirus and content security product reports A Control Manager report is an online collection of figures about security threat and content security events that occur on the Control Manager network.

COMPONENT	DESCRIPTION
Trend Micro Management Communication Protocol	MCP handles the Control Manager server interaction with managed products that support the next generation agent. MCP is the new backbone for the Control Manager system. MCP agents install with managed products and use one/two way communication to communicate with Control Manager. MCP agents poll Control Manager for instructions and updates.
Trend Micro Management Infrastructure	Handles the Control Manager server interaction with older managed products. The Communicator, or the Message Routing Framework, is the communication backbone of the older Control Manager system. It is a component of the Trend Micro Management Infrastructure (TMI). Communicators handle all communication between the Control Manager server and older managed products. They interact with Control Manager 2.x agents to communicate with older managed products.
Control Manager 2.x Agents	Receives commands from the Control Manager server and sends status information and logs to the Control Manager server The Control Manager agent is an application installed on a managed product server that allows Control Manager to manage the product. Agents interact with the managed product and Communicator. An agent serves as the bridge between managed product and communicator. Therefore, install agents on the same computer as managed products.
Web-based management console	Allows an administrator to manage Control Manager from virtually any computer with an Internet connection and Windows™ Internet Explorer™ The Control Manager management console is a web-based console published on the Internet through the Microsoft Internet Information Server (IIS) and hosted by the Control Manager server. It lets you administer the Control Manager network from any computer using a compatible web browser.

COMPONENT	DESCRIPTION
Widget Framework	Allows an administrator to create a customized dashboard to monitor the Control Manager network.

Trend Micro™ Smart Protection Network™

The Trend Micro™ Smart Protection Network™ is a next-generation cloud-client content security infrastructure designed to protect customers from security risks and web threats. It powers both on-premise and Trend Micro hosted solutions to protect users whether they are on the network, at home, or on the go. Smart Protection Network uses lighter-weight agents to access its unique in-the-cloud correlation of email, web, and file reputation technologies, as well as threat databases. Customers' protection is automatically updated and strengthened as more products, services and users access the network, creating a real-time neighborhood watch protection service for its users.

For more information on the Smart Protection Network, visit:

www.smartprotectionnetwork.com

Email Reputation

Trend Micro's email reputation technology validates IP addresses by checking them against a reputation database of known spam sources and by using a dynamic service that can assess email sender reputation in real time. Reputation ratings are refined through continuous analysis of the IP addresses' "behavior," scope of activity and prior history. Email reputation blocks malicious email messages in the cloud based on the sender's IP address, preventing threats from reaching the network or the user's PC.

File Reputation Services

File Reputation Services checks the reputation of each file against an extensive in-the-cloud database. Since the malware information is stored in the cloud, it is available instantly to all users. High performance content delivery networks and local caching servers ensure minimum latency during the checking process. The cloud-agent

architecture offers more immediate protection and eliminates the burden of pattern deployment besides significantly reducing the overall agent footprint.

Web Reputation Services

With one of the largest domain-reputation databases in the world, Trend Micro web reputation technology tracks the credibility of web domains by assigning a reputation score based on factors such as a website's age, historical location changes and indications of suspicious activities discovered through malware behavior analysis. Web reputation then continues to scan sites and block users from accessing infected ones. Web reputation features help ensure that the pages that users access are safe and free from web threats, such as malware, spyware, and phishing scams that are designed to trick users into providing personal information. To increase accuracy and reduce false positives, Trend Micro Web reputation technology assigns reputation scores to specific pages or links within sites instead of classifying or blocking entire sites, since often, only portions of legitimate sites are hacked and reputations can change dynamically over time.

Smart Feedback

Trend Micro Smart Feedback provides continuous communication between Trend Micro products and its 24/7 threat research centers and technologies. Each new threat identified through every single customer's routine reputation check automatically updates all Trend Micro threat databases, blocking any subsequent customer encounters of a given threat.

By continuously processing the threat intelligence gathered through its extensive global network of customers and partners, Trend Micro delivers automatic, real-time protection against the latest threats and provides "better together" security, much like an automated neighborhood watch that involves the community in the protection of others. Because the gathered threat information is based on the reputation of the communication source, not on the content of the specific communication, the privacy of a customer's personal or business information is always protected.

Samples of information sent to Trend Micro:

- File checksums

- Websites accessed
- File information, including sizes and paths
- Names of executable files

You can terminate your participation to the program anytime from the web console.

**Tip**

You do not need to participate in Smart Feedback to protect your computers. Your participation is optional and you may opt out at any time. Trend Micro recommends that you participate in Smart Feedback to help provide better overall protection for all Trend Micro customers.

For more information on the Smart Protection Network, visit:

<http://www.smartprotectionnetwork.com>

Chapter 2

Getting Started with Control Manager

The Control Manager web-based management console allows you to administer managed products and other Control Manager servers.

This chapter contains the following topics:

- *Using the Management Console on page 2-2*
- *Understanding the Function-Locking Mechanism on page 2-4*
- *Accessing the Management Console on page 2-4*
- *Changing Access to the Management Console on page 2-6*
- *Configuring Web Console Settings on page 2-7*
- *Configuring Command Time-out Settings on page 2-8*
- *Logging Off from the Management Console on page 2-9*

Using the Management Console

The Control Manager management console is a web-based console published on the Internet or Intranet through Microsoft™ Internet Information Services (IIS) and hosted by the Control Manager server. The web console lets you administer the Control Manager network from any machine using a compatible web browser.



Note

View the web console at a screen resolution of 1366 x 768 pixels.

The web console consists of the following: main menu, drop-down menus, working area, and **Help** menu.

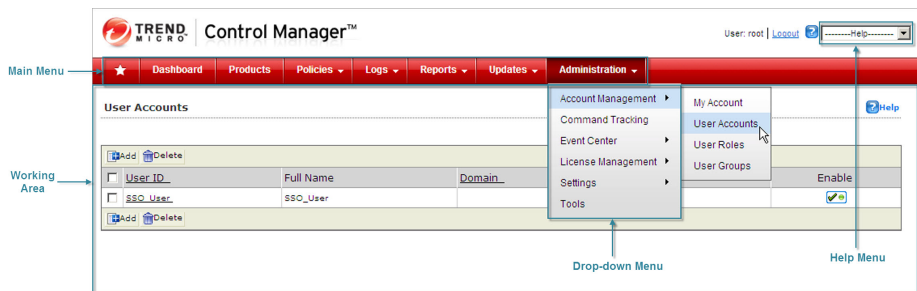


FIGURE 2-1. Control Manager management console

Main Menu

The web console main menu includes links to the following Control Manager functions.

TABLE 2-1. Contents of the Control Manager Main Menu

MAIN MENU ITEM	DESCRIPTION
Favorites (*)	Allows users to add menu shortcuts for quick access

MAIN MENU ITEM	DESCRIPTION
Dashboard	Allows the addition of widgets that provide at-a-glance summaries of your network. The widgets also include shortcuts to detailed information screens and ad hoc queries.
Directories	Includes the following options: • Users/Endpoints: allows you to view user/endpoint information, and conduct security investigations • Products: allows you to administer managed products, communicators, and child servers
Policies	Includes options to perform policy management and update policy templates.
Logs	Includes options to view logs for all products register to the Control Manager server.
Reports	Includes options to manage Control Manager managed products and child server reports.
Updates	Provides options for configuring manual and scheduled updates and component deployment plans.
Administration	Includes the Account Management , Command Tracking , Event Center , License Management , Settings , Outbreak Prevention Services , and Tools options.

Drop-Down Menu

The drop-down menus for each main menu item appear after moving the cursor over the specified item. Only the **Dashboard** menu items do not contain a drop-down menu.

Working Area

Use the working area to manage the Control Manager network. Here users can administer managed products or child server settings, invoke tasks, or view system status, logs, and reports.

Help Menu

The **Help** menu provides the following supports:

- Advanced feature descriptions and detailed configuration information
- Product information and procedures provided by the Trend Micro Support team
- Latest malware advisories as well as the list of the current top 10 security threats
- Control Manager version, build number, and copyright information

Understanding the Function-Locking Mechanism

The web console has a function-locking mechanism that prevents two users from accessing the **Directory Management** screen at the same time.

This means that when user A is arranging managed products using Directory Management, user B, who is also logged on to the web console, cannot access the **Directory Management** screen.

If you attempt to access a locked option, the locked option information screen appears. Control Manager only allows one user to use the function at a time.

To verify that the function is still in use, periodically click **Reload**.

To release the lock, click **Break** to release the lock.



Note

The unlock function is available for users with the privileges to manage product folders.

Accessing the Management Console

You have two ways to access the web console:

- Locally on the Control Manager server

- Remotely using any compatible browser

Accessing the Web Console Locally from the Control Manager Server

Procedure

1. Click **Start > Programs > Trend Micro Control Manager > Trend Micro Control Manager**.
 2. Provide the user name and password in the fields provided.
 3. Click **Log On**.
-

Accessing the Console Remotely

Procedure

1. Type the following in your browser's address field to open the **Log On** screen:

`http(s)://{host name}/WebApp/login.aspx`

Where host name is the Control Manager server's fully qualified domain name (FQDN), IP address, or server name.
 2. Provide the user name and password in the fields provided.
 3. Click **Log on**.
-

Upon opening the web console, the dashboard displays the status summary for the whole Control Manager network. This summary is identical to the status summary generated from the Product Directory. User rights determine the Control Manager functions a user can access.

**Note**

Control Manager does not allow using the same Control Manager web console in more than one browser on the same computer if you use the same user name and password. Multiple instances on different computers using the same user name and password are supported.

Changing Access to the Management Console

During Control Manager installation you can choose the level of security when accessing the management console. The least secure only requires an HTTP connection. The most secure requires an HTTPS connection. If the least secure connection was selected during installation, you can change the access level after installation to the most secure connection.

You must obtain a certificate and set up the Control Manager virtual directory before you can start sending encrypted or digitally signed information to and from a Control Manager server.

Assigning HTTPS Access to the Control Manager Web Console

Procedure

1. Obtain a Web site Certificate from any certification providers (for example, Thawte.com or VeriSign.com).
2. Click **Start > Programs > Administrative Tools > Internet Services Manager** to open the IIS Microsoft Management Console (MMC).
3. Click the + sign adjacent to the IIS server to expand the virtual site list.
4. Select **Default Web Site** and then right-click **Properties**.
5. On the **Default Web Site Properties** screen, select the **Directory Security** tab and then click **Server Certificate** to create a server certificate request using the new Certificate Wizard.

- a. Click **Next**.
 - b. On the **Server Certificate Method** screen, select **Import a certificate from a Key Manager backup file** and then click **Next**.
 - c. Type the key **full path** and **file name** (for example, `cm_cert.key`) and then click **Next**.
 - d. Specify the key **password** and then click **Next**.
 - e. On the **Imported Certificate Summary** screen, click **Next** to implement the server certificate or click **Back** to modify settings.
6. Click **OK** to apply the Default Web Site server certificate and go back to the Default Web Site list.
 7. Select the **Control Manager** virtual directory from the Default Web Site list and then right-click **Properties**.
 8. Click the **Directory Security** tab and then click **Edit** under **Secure communications**.

The **Secure Communications** window appears.

9. Select **Require secure channel (SSL)** and **Require 128-bit encryption**.
10. Click **OK** to close the **Secure Communications** window.
11. Click **OK** to apply changes and go back to the Default Web Site list.

The next time you access the web console using HTTP, the following message appears:

“You must view this page over a secure channel”

Configuring Web Console Settings

From the **Web Console Settings** screen, configure the console auto refresh and time-out settings. Enabling the auto refresh function allows the web console to update the screen periodically. When the console times out, Control Manager requires user authentication (logging on) to access the web console.

Procedure

1. Navigate to **Administration > Settings > Web Console Settings**.
The **Web Console Settings** screen appears.
 2. On the working area under **Web Console Auto Refresh**, select **Enable Auto Refresh**.
 3. Specify the auto refresh frequency from **10** to **300** seconds (Dashboard only).
 4. On the working area under **Web Console Timeout Setting**, select **Enable automatic log out from the web console**.
 5. Specify the console time-out setting from **10** to **30** minutes (Dashboard and Product Directories).
 6. On the working area under **Web Console Security**, select **Enable web console security**.
 7. Specify the number of consecutive unsuccessful logon attempts before a user account is locked.
 8. Specify the duration of an account lockout.
 9. Click **Save**.
-

Configuring Command Time-out Settings

From the **Communication Time-out Settings** screen, configure the command time-out settings. When a command times out, Control Manager stops trying to execute the command (for example a deploy component command to OfficeScan servers).

Procedure

1. Navigate to **Administration > Settings > Communication Time-out Settings**.
The **Communication Time-out Settings** screen appears.

2. On the working area under **Command Time-out Settings**, specify the command time-out setting:
 - 24 hours
 - 48 hours
 - 72 hours
 3. Click **Save**.
-

Logging Off from the Management Console

To log off from the management console, perform one of the following:

Procedure

- Click **Log Off** on the top right corner of the web console.
 - Press the CTRL and W keys simultaneously.
-

Chapter 3

Configuring User Access

Administrators can control which web console screens a user can view and the user's access to managed products that are registered to the Control Manager server.

This chapter contains the following topics:

- *Understanding User Access on page 3-2*
- *Understanding User Roles on page 3-3*
- *Understanding User Accounts on page 3-15*
- *Understanding User Groups on page 3-26*

Understanding User Access

Control Manager access control consists of the following four sections.

TABLE 3-1. Control Manager User Access Options

SECTION	DESCRIPTION
My Account	The My Account screen contains all the account information that Control Manager has for a specific user. The information on the My Account screen varies from user to user.
User Accounts	The User Accounts screen displays all Control Manager users. The screen also provides the options for users to create and maintain Control Manager user accounts. Use these functions to define clear areas of responsibility for users by restricting access rights to certain managed products and limiting what actions users can perform on the managed products. The functions are: • Execute • Configure • Edit Directory
User Roles	The User Roles screen displays all Control Manager user roles. The screen also provides the options for users to create and maintain Control Manager user roles. User roles define which areas of the Control Manager web console a user can access.
User Groups	The User Groups screen contains Control Manager groups and provides options for creating groups. Control Manager uses groups as an easy method to send notifications to a number of users without having to select the users individually. Control Manager groups do not allow administrators to create a group that shares the same access rights.

**Note**

Assign users with different access rights and privileges to permit the delegation of certain management tasks without compromising security.

Root Account Information

Control Manager creates the **Root** account upon installation. The Root and Administrator accounts can view all the functions in the menu, use all available services, and, on older managed products, can install agents.

The Root account also has the following additional privileges:

- Only the Root account can see all user accounts on the server; other accounts can only see their child accounts.
- The Root account can unlock a locked function by forcibly logging out the user who currently uses the function.

**Note**

Control Manager accounts log on to Control Manager only and not the entire network. Control Manager user accounts are not the same as network domain accounts.

Understanding User Roles

Control Manager uses the following as the default user roles. Administrators cannot modify access permissions for the default user roles.

- Administrator/Root
- DLP Compliance Officer
- DLP Incident Reviewer
- Operator
- Power User

Control Manager also supports custom user roles. Custom user roles allow Control Manager administrators to specify which Control Manager web console menu items other users can access.

 Note

Trend Micro suggests configuring user roles and user account settings in the following order:

1. Specify which products/directories the user can access (step 4 of [Editing a User Account on page 3-24](#)).
2. Specify which menu items the user can access. If the default user roles are not sufficient, see [Adding a User Role on page 3-11](#) or [Editing a User Role on page 3-13](#).
3. Specify the user role for the user's account (step 4 of the [Editing a User Account on page 3-24](#)).

TABLE 3-2. User Role Access

MENU ITEM		ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Dashboard						
Directories	Users/Endpoints					
	Products					

MENU ITEM			ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Policies	Policy Management						
	Policy Resources	Policy Template Settings					
		DLP Data Identifiers					
		DLP Templates					
Logs	New Ad Hoc Query						
	Saved Ad Hoc Queries						
	Log Aggregation						
	Log Maintenance						

MENU ITEM		ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Reports	My Reports	●			●	●
	One-time Reports	●				●
	Scheduled Reports	●				●
	Custom Templates	●				●
	Report Maintenance	●				●

MENU ITEM		ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Updates	Manual Download	●				●
	Scheduled Download	●				●
	Component List	●				●
	Deployment Plan	●				●
	Scheduled Download Exceptions	●				●
	Update / Deployment Settings	●				●

MENU ITEM			ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Administration	Account Management	My Account					
		User Accounts					
		User Roles					
		User Groups					
	Managed Servers						
	Command Tracking						
	Event Center	Event Notifications					
		General Event Settings					
	License Management	Control Manager					
		Managed Product					

MENU ITEM			ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Administration	Settings	Agent Communication Schedule	●				
		Communication Time-out Settings	●				
		Proxy Settings	●				
		Web Console Settings	●				
		Smart Protection Network Settings	●				
		Product Agent Settings	●			●	●
		Active Directory and Widget Settings	●				
		Parent Control Manager Settings	●				
		Deep Security Management	●				

MENU ITEM			ADMINISTRATOR	DLP COMPLIANCE OFFICER	DLP INCIDENT REVIEWER	OPERATOR	POWER USER
Administration	Outbreak Prevention Services	Policies					
		History					
		Settings					
Tools							

About Adding User Roles

Each default user role has assigned permissions on select menu items in the Control Manager web console. Administrators can add additional permissions for menu items but cannot remove predefined permissions from the default user roles.

If the default user roles are not flexible enough for an administrator's needs, administrators can now create their own user roles. User-specified user roles allow administrators to customize the permissions of any Control Manager web console elements.

**Note**

Managed product information displayed on accessible menu items depends on the managed product/directory permissions that Control Manager administrators specify in an individual's user account.

Example:

Bob and Jane are OfficeScan administrators. Both have identical user role permissions (they have access to the same menu items in the web console). However, Jane oversees operations for all OfficeScan servers. Bob only oversees operations for OfficeScan servers protecting desktops for the Marketing department. The information that they can view in the web console will be very different. Bob logs on and only sees information that is applicable to the OfficeScan servers that his Control Manager user account allows (the OfficeScan servers for the Marketing department). When Jane logs on, she sees information for all OfficeScan servers, because her Control Manager user account grants her access to all OfficeScan servers registered to Control Manager.

Adding a User Role

Procedure

1. Navigate to **Administration > Account Management > User Roles**.

The **User Roles** screen appears.

User Roles Help	
Add Delete	
☐ Name	Description
Administrators	Administrators
DLP Compliance Officer	A Compliance Officer can monitor, review, and investigate DLP incidents triggered by all Active Directory users.
DLP Incident Reviewer	An Incident Reviewer can investigate DLP incidents triggered by users reporting to them.
Operators	Operators
Power Users	Power Users
SSO Users	SSO Users
Add Delete	

2. On the working area, click **Add**.

The **Add Role** screen appears.

Add Role Help

Role Information

Name * :

Description * :

Menu Access Control

Select accessible menus:

- ☒ Favorite
- ☒ Dashboard
- ☐ Products
- ☐ Policies
 - ☐ Policy Management
 - ☐ Policy Resources
 - ☐ Policy Template Settings
- ☐ Managed Servers

3. On the working area under **Role Information**, type a unique user role name in the **Name** field.
4. Provide a meaningful description for the user role in the **Description** field.

**Note**

The description appears in the User Roles list. Providing a meaningful description can help administrators quickly identify a user role if the user role name cannot fully convey the use for the user role.

5. On the working area under **Menu Access Control**, select the accessible menu items for the user role. The following menu items are accessible to every user role: **Dashboard**, **Favorites**, and **Help**.
6. Click **Save**.

The **User Roles** screen appears and the new user role appears in the User Roles list.

About Editing User Roles

Control Manager allows users to modify customized user roles. Users can only modify the names and descriptions of the default user roles but not their accessible menu items.

Edit user roles when a user role becomes outdated or requires minor maintenance.



Note

Managed product information displayed on accessible menu items depends on the managed product/directory permissions that Control Manager administrators specify in an individual's user account.

Example:

Bob and Jane are OfficeScan administrators. Both have identical user role permissions (they have access to the same menu items in the web console). However, Jane oversees operations for all OfficeScan servers. Bob only oversees operations for OfficeScan servers protecting desktops for the Marketing department. The information that they can view in the web console will be very different. Bob logs on and only sees information that is applicable to the OfficeScan servers that his Control Manager user account allows (the OfficeScan servers for the Marketing department). When Jane logs on, she sees information for all OfficeScan servers, because her Control Manager user account grants her access to all OfficeScan servers registered to Control Manager.

Editing a User Role

Procedure

1. Navigate to **Administration > Account Management > User Roles**.


The **User Roles** screen appears.



Name	Description
Administrators	Administrators
DLP Compliance Officer	A Compliance Officer can monitor, review, and investigate DLP incidents triggered by all Active Directory users.
DLP Incident Reviewer	An Incident Reviewer can investigate DLP incidents triggered by users reporting to them.
Operators	Operators
Power Users	Power Users
SSO Users	SSO Users

2. Click a user role from the **Name** column.

The **Edit Role** screen appears.

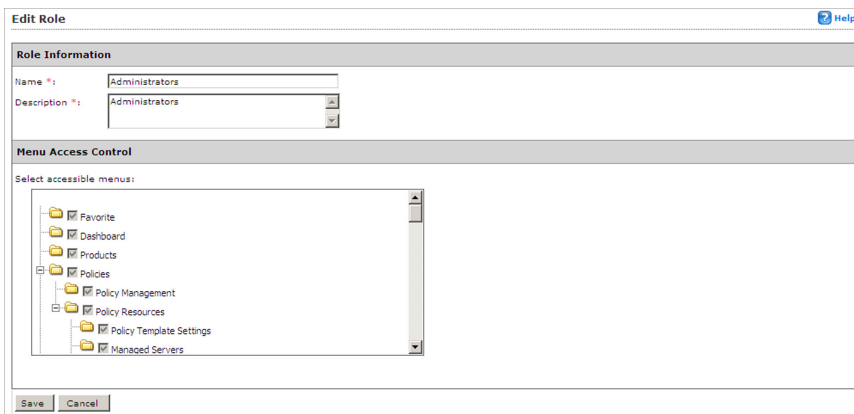

Role Information

Name *: Administrators

Description *: Administrators

Menu Access Control

Select accessible menus:

- Favorite
- Dashboard
- Products
- Policies
 - Policy Management
 - Policy Resources
 - Policy Template Settings
- Managed Servers

Save Cancel

3. Edit the required user role information.
4. Click **Save**.

The **User Roles** screen appears and the user role appears in the User Roles list.

Understanding User Accounts

Administrators can use the functions on the **User Accounts** screen to assign users clearly defined areas of responsibility by restricting their access rights to certain managed products and limiting the actions that they can perform.



Note

When administrators specify which products a user can access, the administrator is also specifying what information a user can access from Control Manager. The following information is affected: component information, logs, product summary information, security information, and information available for reports and log queries.

Example:

Bob and Jane are OfficeScan administrators. Both have identical user role permissions (they have access to the same menu items in the web console). However, Jane oversees operations for all OfficeScan servers. Bob only oversees operations for OfficeScan servers protecting desktops for the Marketing department. The information that they can view in the web console will be very different. Bob logs on and only sees information that is applicable to the OfficeScan servers that his Control Manager user account allows (the OfficeScan servers for the Marketing department). When Jane logs on, she sees information for all OfficeScan servers, because her Control Manager user account grants her access to all OfficeScan servers registered to Control Manager.

Setting Access Rights

User access rights determine the controls available to the user in the Product Directory. For example, when you only assign a user the Execute right, then only the options associated with this right appear on the Product Directory.

You can give each user account the following access rights to a product.

TABLE 3-3. Control Manager User Account Options

PERMISSION	DESCRIPTION
Execute	This right permits the user to run commands on managed products in assigned folders. For example: • Start Scan Now • Deploy pattern files/cleanup templates • Enable Real-time Scan • Deploy program files • Deploy engines • Deploy license profiles
Configure	This right gives the user access to the configuration consoles of the managed products in the assigned folders. Users with this right can see Configure <managed product> and similar product-specific controls (for example, OfficeScan password configuration features) on their menus.
Edit Directory	This right permits the user to modify the organization of the managed products/directories the user can access.

**Note**

The options that actually appear also depend on the product's profile. For example, if a product does not have a scanning function, such as eManager, then the Scan Now control does not appear in the Product Tree Tasks menu.

The **User Accounts** screen displays the following.

TABLE 3-4. User Accounts Screen Contents

ACCOUNT INFORMATION	DESCRIPTION
User ID	The user name of the account user.
Full Name	The full name of the account user.

ACCOUNT INFORMATION	DESCRIPTION
Domain	The Active Directory domain (if any) to which the user belongs.
User Role	The user role assigned to the user (example: Administrator).
Enable	The current status of the account.

**Note**

Upon installation, Control Manager automatically creates a root account.

About Adding/Importing User Accounts

Control Manager user accounts allow administrators to specify which products or directories other users can access.

**Note**

When administrators specify which products a user can access, the administrator is also specifying what information a user can access from Control Manager. The following information is affected: component information, logs, product summary information, security information, and information available for reports and log queries.

Example:

Bob and Jane are OfficeScan administrators. Both have identical user role permissions (they have access to the same menu items in the web console). However, Jane oversees operations for all OfficeScan servers. Bob only oversees operations for OfficeScan servers protecting desktops for the Marketing department. The information that they can view in the web console will be very different. Bob logs on and only sees information that is applicable to the OfficeScan servers that his Control Manager user account allows (the OfficeScan servers for the Marketing department). When Jane logs on, she sees information for all OfficeScan servers, because her Control Manager user account grants her access to all OfficeScan servers registered to Control Manager.

Add user accounts to do the following:

- Allow administrators to specify which products or directories other users can access

- Allow other users to log on to the Control Manager web console
- Allow administrators to specify the user on the recipient list for notifications
- Allow the administrator to add the user to user groups.

**Note**

Trend Micro suggests configuring user role and user account settings in the following order:

1. Specify which products/directories the user can access (step 4 of [Editing a User Account on page 3-24](#)).
 2. Specify which menu items the user can access. If the default user roles are not sufficient, see [Adding a User Role on page 3-11](#) or [Editing a User Role on page 3-13](#).
 3. Specify the user role for the user account (step 4 of [Editing a User Account on page 3-24](#)).
-

When adding a user account, you need to provide information to identify the user, assign a user role, and set folder access rights.

**Note**


Active Directory users cannot have their accounts disabled from Control Manager. To disable an Active Directory user, you must disable the account from the Active Directory server.

Adding/Importing a User Account

Procedure

1. Navigate to **Administration > Account Management > User Accounts**.

The **User Accounts** screen appears.

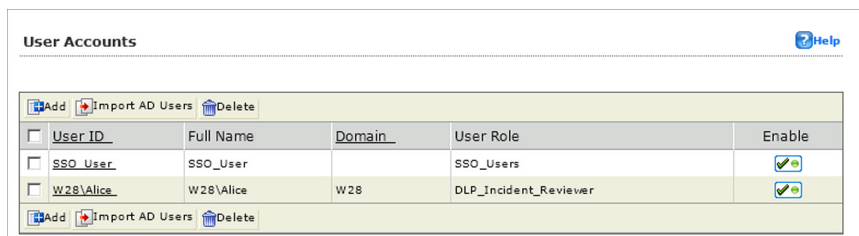


User ID	Full Name	Domain	User Role	Enable
SSO_User	SSO_User		SSO_Users	
W28\Alice	W28\Alice	W28	DLP_Incident_Reviewer	

2. Click one of the following buttons to create the account:

- **Add**

The **Step 1: User Information** screen appears.

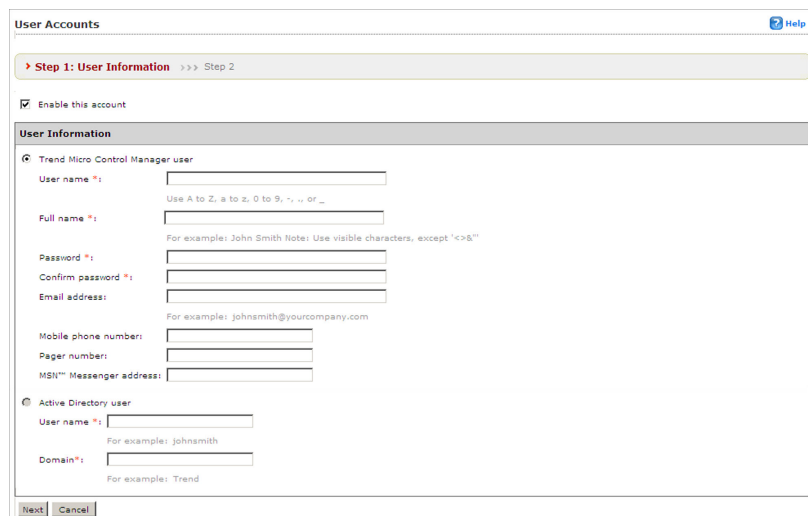

User Accounts [Help](#)

Step 1: User Information >>> Step 2

☒ Enable this account

User Information

☒ Trend Micro Control Manager user

User name *:

Use A to Z, a to z, 0 to 9, -, ., @, _

Full name *:

For example: John Smith Note: Use visible characters, except "<>&"

Password *:

Confirm password *:

Email address:

For example: johnsmith@yourcompany.com

Mobile phone number:

Pager number:

MSN™ Messenger address:

☐ Active Directory user

User name *:

For example: johnsmith

Domain*:

For example: Trend

- **Import AD Users**

The **Import Active Directory Users** screen appears. Search for and add users to the Import List. Continue to step 5.

[]{};:=,+?<>\" and limit to 64 characters.' The 'Base distinguished name' field has a note: 'For example, dc=domain,dc=company,dc=com. Note: Use visible character, and limit to 256 characters.' There is a 'Search' button. Below the search section is a 'Search Result' section. It contains a note: 'Note: Top 10 matches per domain will be listed.' There are two list boxes: 'User(s)' and 'Import List'. The 'User(s)' list box contains '-- AD User List --'. The 'Import List' list box contains '-- Import User List --'. Between the list boxes are two buttons: '>' and '<'. At the bottom of the 'Search Result' section are two buttons: '>> Next' and 'Cancel'."/>

Import Active Directory Users

Search

User name:
 For example, John Smith or John*.
 Note: Use visible character, except "/"[]{};:=,+?<>" and limit to 64 characters.

Base distinguished name:
 For example, dc=domain,dc=company,dc=com.
 Note: Use visible character, and limit to 256 characters.

Search Result

Note: Top 10 matches per domain will be listed.

User(s) **Import List**

-- AD User List --

-- Import User List --

3. Select **Enable this account** to enable the Control Manager user.
4. Select the type of user to add:
 - To add a Trend Micro Control Manager user:
 - a. Select **Trend Micro Control Manager user**.
 - b. Provide the following required information to create an account:
 - **User name:** The name the user will use to log on to the Control Manager web console.
 For example, OfficeScan_Admin.
 - **Full name:** The full name of the user.

For example, John Smith.

- **Password** and **Confirm password**: Type and confirm your password in the fields provided. All users can change their log on password on the **My Account** screen.
- c. The following additional information is optional. All users can also change these settings on the **My Account** screen.
 - **Email address**: The email address to which the user has notifications delivered.
 - **Mobile phone number**: The cell phone to which the user has notifications delivered.
 - **Pager number**: The pager to which the user has notifications delivered. (Precede the pager number with a 9 and a comma ", " [each comma causes a 2 second pause])
 - **MSN Messenger address**: The instant messenger address to which the user has notifications delivered.
- To add an Active Directory user:

**Note**

Active Directory users cannot have their accounts disabled from Control Manager. To disable an Active Directory user, you must disable the account from the Active Directory server.

- a. Select **Active Directory user**.
- b. Provide the following required information to create an account:
 - **User name**: The user's Active Directory identification
 - **Domain**: The domain to which the user belongs

**Note**

User names and domain names can be up to 32 characters in length.

- 5. Click **Next**.

The **Step 2: Access Control** screen appears.

User Account Help

Step 1 >>> **Step 2: Access control**

☒ Enable this account

Managed Product Access Control

Select role: Unassign Role ▼

Select accessible products/folders:

- ☐ Cascading Folder
- ☐ Local Folder

Specify access rights:

☒ Execute ☒ Configure ☒ Edit Directory

Data Loss Prevention

☐ Monitor, review, and investigate DLP incidents triggered by all users

Back Finish Cancel

6. Select a default or custom user role from the **Select role** list. Control Manager provides the following user roles by default:

- **Administrator**
- **DLP Compliance Officer**
- **DLP Incident Reviewer**
- **Operator**
- **Power User**



Note

The DLP Compliance Officer and DLP Incident Reviewer roles are available to Active Directory users only.

7. Select the products or directories the user has access to from **Select accessible products/folders**.

**Note**

Carefully organize the Product Directory for ease of use. Assigning access to a folder allows users to access all of its sub-folders and managed products. You can restrict a user to a single managed product.

8. Select the rights to assign to the user. These rights determine the actions that the user can perform on managed products.

**Note**

Privileges granted to an account cannot exceed those of the grantor. That means you cannot assign a user access rights that are greater than your own. In addition, if you reduce an account's rights, you also reduce all of its child accounts.

9. Select **Monitor, review, and investigate DLP incidents triggered by all users** to grant the DLP_Compliance_Officer role to users with Administrator privileges.
 10. Click **Finish**.
-

About Editing User Accounts

You can change the information of any user account including the account information, user role, or folder access rights. If you reduce an account's rights, you also reduce the rights of all its child accounts.

When editing accounts, remember:

- Root users can edit all the accounts that exist on the system. Users with **Administrator** accounts, however, can only edit accounts that they created themselves.
- An account's rights are a subset of those of its grantor and adjust accordingly if the grantor's rights are reduced.
- Modification of an account's privileges terminates all sessions using that account. If this modification involves a reduction of rights, child accounts whose privileges are also affected will also log out.

- You cannot change an existing account's user name.

Editing a User Account

Procedure

1. Navigate to **Administration > Account Management > User Accounts**.

The **User Accounts** screen appears.

2. Click the account to modify.

The **Edit User Account** screen appears.

3. Modify the account information, and then click **Next**.
 4. Modify the user role, accessible folders, and access rights.
 5. Click **Finish**.
-

Disabling a User Account

Disable a user account to temporarily prevent a user from accessing the Control Manager network. This preserves the user account information and still allows the user account to be re-enabled anytime in the future.

Procedure

1. Navigate to **Administration > Account Management > User Accounts**.

The **User Accounts** screen appears.

2. Complete one of the following:

- Click the status icon (a green check) under the **Enable** column of the User Accounts table. The status icon changes to a red icon.
- Clear the **Enable this account** check box:
 - a. Access the user's account screen.

- b. On the working area of the **Add User** or **Edit User** screen, clear the **Enable this account** check box.
 - c. Click **Next**.
 - d. Click **Finish**.
-

Deleting a User Account

You can permanently remove a user account from accessing the Control Manager network. After you delete a user account, Control Manager removes the account from any groups the account belonged to, and the user no longer receives notifications for those events for which the user account was part of a recipient list.

Procedure

1. Navigate to **Administration > Account Management > User Accounts**.
The **User Accounts** screen appears.
 2. Select the check box for the account to delete.
 3. Click **Delete**.
-

Understanding My Account

The **My Account** screen contains all the account information Control Manager has for a specific user. The information on this screen varies with the user.

The **My Account** screen displays the following:

ACCOUNT INFORMATION	DESCRIPTION	EXAMPLES
User name	The user name of the account user. This is a required field.	Administrator

ACCOUNT INFORMATION	DESCRIPTION	EXAMPLES
Full name	The full name of the account user. This is a required field.	John Smith
Password	Password used to log on to Control Manager. This is a required field.	MyPassword!
Confirm password	Confirm the password required to log on to Control Manager. This is a required field.	MyPassword!
Email address	The email address for the account user.	johnsmith@mycompany.com
Mobile phone number	The cellular phone number for the account user.	555-5551234
Pager number	The pager number for the account user.	555-5552345
MSN™ Messenger email address	The MSN email address for the user	johnsmith@mycompany.com

Understanding User Groups

User groups simplify the management of Control Manager users by providing a convenient way to send notifications to a single group rather than to individual users. The **User Groups** screen contains Control Manager groups. Control Manager uses groups as an easy method to send notifications to a number of users without having to select the users individually.

Example: Multiple OfficeScan administrators would want to be informed of an outbreak, even if an outbreak was not a server that was managed by that particular administrator.

The **User Groups** screen displays the following.

TABLE 3-5. User Group Table

GROUP INFORMATION	DESCRIPTION
Groups	The name of the group.
Edit	Click the accompanying link in this row to edit the users who belong to the group.
Delete	Click the accompanying link in this row to delete a group from Control Manager.


Adding a User Group

You can add users to groups according to similar properties including user types, location, or the type of notifications they should receive. If a user does not have a Control Manager user account, you can still add the user to a group by typing their email address. However, they will only receive notifications if the group has been added to the recipient list for specific events.

Procedure

1. Navigate to **Administration > Account Management > User Roles**.

The **User Roles** screen appears.

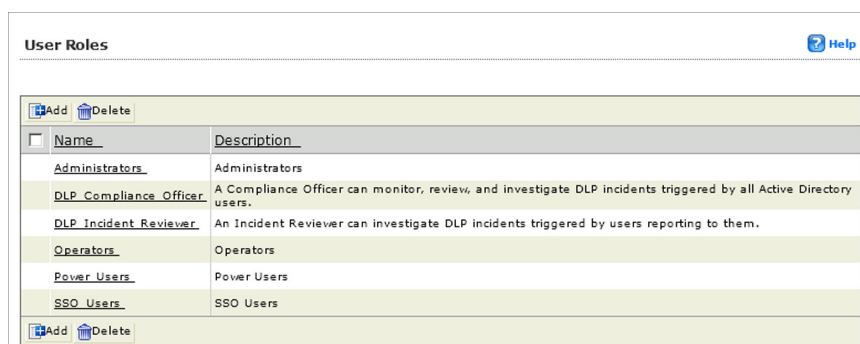

2. On the working area, click **Add New Group**.

Add New Group [Help](#)

The group members list is derived from the Control Manager user accounts database. To notify recipients that do not have accounts, enter their contact information under Additional members.

Group name:
Use A to Z, a to z, 0 to 9, -, or _ and limit to 32 characters.

Group members:

User(s)		Group User List
SSO_User	>>	
root	<<	

Additional members: (Use semicolons (;) to separate multiple entries.)

Email address(es):

Pager number(s):

3. Type a descriptive name for the group in **Group name**.
4. Under **Group Members**, add or remove users to the group list.
 - To add a user:
 - a. Select a user from the User(s) list. Use the CTRL key to select multiple users.
 - b. Click >> to add the selected user(s) to the Group User List. Control Manager sends notifications to users based on the contact information specified during their account setup.
 - To remove a user:
 - a. Select a user from the Group User List. Use the CTRL key to select multiple users.
 - b. Click << to remove the user.
5. To add individuals who do not have Control Manager accounts to the Group User List, provide the following under **Additional members**:
 - Email address(es)
 - Pager number(s) (precede the pager number with the number your company uses to dial out and a comma "," [each comma causes a 2 second pause])
 Separate multiple entries with semicolons.
6. Click **Save**.

7. Click **OK**.
-

Editing a User Group

Users can be added or removed to a group at anytime, including those users that do not have a Control Manager user account.

Procedure

1. Navigate to **Administration > Account Management > User Roles**.
The **User Roles** screen appears.
 2. On the working area, click **Edit** beside the group to modify.
 3. Change the entries as required.
 4. Click **Save**.
 5. Click **OK**.
-

Deleting a User Group

Permanently remove a user group from the Control Manager network after you no longer require the group. After you delete a user group, members will no longer receive notifications for those events for which the user group was added to the recipient list.

Procedure

1. Navigate to **Administration > Account Management > User Roles**.
The **User Roles** screen appears.
2. Click **Delete** beside the group to delete.
3. Click **OK** to delete the user group.

4. Click **OK**.
-

Chapter 4

User/Endpoint Directory Basics

The User/Endpoint Directory displays all users and associated endpoints.

This chapter contains the following topics:

- *Accessing the User Tree on page 4-3*
- *Understanding the User/Endpoint Directory on page 4-2*
- *Understanding Custom Tags and Filters on page 4-24*
- *Working with Custom Tags on page 4-26*
- *Working with Custom Filters on page 4-29*
- *Understanding the Active Directory Synchronization on page 4-15*

Understanding the User/Endpoint Directory

The User/Endpoint Directory is a graphical representation of the organization of your Control Manager network. Control Manager 6.0 Service Pack 1 allows you to organize your network into groups of users or endpoints.

The default User/Endpoint Directory follows this structure:



Note

All users are placed in the **Users** tree under the following circumstances:

- If a local user logs on to a registered endpoint
- If they are part of Active Directory and the administrator enables Active Directory integration

Users cannot be removed from the complete users list even if a user creates their own grouping.

Consequently, all endpoints are lumped in the **Endpoints** tree, with **Endpoint Type** and **Operating System** as default filters. These default trees and grouping can neither be deleted nor renamed.

- **Users:** Offers a list of all users in your managed network
- **Endpoints:** Offers a list of all endpoints and devices in your managed network (from endpoint-based managed products)
- **Active Directory:** Offers a one-to-one mapping of your Active Directory structure

Control Manager supports synchronization of Active Directory domains coming from the same forest.

You can organize the User/Endpoint Directory through any of these methods:

- **Filter-based grouping:** Use filters to group users or endpoints based on specific characteristics
- **Tag-based grouping:** Use tags to assign users or endpoints manually
- **Active Directory mapping:** Synchronize automatically with your Active Directory server

User/Endpoint Directory on Parent Control Manager Servers

Administrators of parent Control Manager can monitor entities of child servers through the **User/Endpoint Directory**. By default, child servers will sync the following information with its parent server hourly:



Note

The timing is based on the time interval setting in `SystemConfiguration.xml` file.

- Managed entity and physical machine relationship
- Corresponding policy of each endpoint entity
- Non-Active Directory users in the incident log

Accessing the User Tree

Procedure

1. Access the Control Manager management console.
 2. Navigate to **Directories > Users/Endpoints**.
 3. Go to **Users > All**.
-

A screen similar to the following appears:

Users

All

Custom Tags

Custom Filters

Endpoints

All

Custom Tags

Filters

Active Directory

Report (Active Directory)

Assign/Remove Custom Tags

User	Domain	Manager	Endpoints	Security Threats	Associated Policies
kate_yao	IVBK	N/A	0	0	0
lulin	REPORT	N/A	0	0	0
lulin	IVBK	N/A	0	0	0
lulin@sp1-thehacker.com	N/A	N/A	1	0	0
luna	lulinmac	N/A	1	0	0
moggy	REPORT	N/A	0	0	0
patrick	IVBK	N/A	0	0	0
patrick	REPORT	N/A	1	0	0
patrickchao	hikikimbp	N/A	1	0	0
shizune	IVBK	N/A	0	0	0
shizune	REPORT	N/A	1	0	1
sqluser	REPORT	N/A	0	0	0
tmcm	REPORT	N/A	0	0	0
user space	REPORT	N/A	1	0	1
user space	IVBK	N/A	0	0	0
wayne	IVBK	N/A	0	0	0

COLUMN NAME	DESCRIPTION
User	The name or email address of the user depending on the endpoint: - Computer/server: The most recent user who logged on and/or used the computer/server is identified as the current owner. - Mobile device: The email address associated with the mobile device is used to find the corresponding user in Active Directory. If the corresponding AD user cannot be found or if AD synchronization is not available, the email address is used as the current owner. Click the name to open the User Details > Contact Information screen. Refer to Displaying User Details on page 4-7 for details.  Note The Users > All node list all local users from various endpoints regardless of their duplicate status. Duplicate users Users having the same names can occur Control Manager consolidates all endpoints from managed products having multiple local users.
Domain	If Active Directory integration is enabled, this corresponds to the name of the domain. Without Active Directory, the value in this column reflects the endpoint name/host name.
Manager	The user's direct reporting manager, as saved in Active Directory
Endpoints	The number of endpoints, which the user is currently logged on to or was the last one to log on.

COLUMN NAME	DESCRIPTION
Security Threats	The total number of threats logged in 90 days Click the value to display the User Details > Security Threats screen. Refer to Security Threats on page 4-8 for details. Control Manager counts and consolidates detections having these types of threats: • Virus/Malware • Spyware/Grayware • Content violation • Spam • Phishing email • Web violation • DLP incident • C&C callback • Behavior Monitoring violation • Firewall violation For example, while Henry is the last user using endpoint <code>us-mkt-dev1</code>, there are 10 virus/malware detections and two web violations. Because Henry was the last one to use the endpoint, Henry's security threats count is 12.  Note If the network environment is not using Active Directory the following detections/violations for gateway products do not display: content violation, phishing email, spam.

COLUMN NAME	DESCRIPTION
Associated Policies	The number of policies assigned to endpoints, which the user is currently logged on to or was the last one to log on. Click the value to display the User Details > Policy Status screen. Refer to Policy Status on page 4-9 for details. The Policy Status displays the list of policies and their status that are related to an endpoint, including the managed product where such policy originates, its version and build.

What to do next

- You can perform [basic on page 4-22](#) or [advanced on page 4-23](#) search of users.
- To automatically group users by creating a [custom filter on page 4-29](#), refer to [Creating a Custom Filter on page 4-29](#).
- To manually group users by creating a [custom tag on page 4-26](#), refer to [Creating a Custom Tag on page 4-26](#)

Displaying User Details

Procedure

1. [Access the User/Endpoint Directory on page 4-3](#).
2. Do one of the following:
 - [Search for a user on page 4-22](#).
 - Navigate to the **Users > All** node.
 - If you have group users according to custom tags/filters, go to the custom tag/filter of your choice.

Here is an example displaying the **Users > All** node:

User/Endpoint Directory

Search **Endpoints** [Advanced](#) User


Assign/Remove Custom Tags

User	Domain	Manager	Endpoints	Security Threats	Associated Policies
luna	test.com	N/A	1	3	0
moggy	test.com	N/A	0	0	0
patrick	test.com	N/A	0	0	0
patrick	test.com	N/A	1	4	0
patrickchao	test.com	N/A	1	0	0
shizune	test.com	N/A	0	0	0
shizune	test.com	N/A	1	4	1
sqluser	test.com	N/A	0	0	0
tmcm	test.com	N/A	0	0	0
user space	test.com	N/A	0	0	0
user space	test.com	N/A	1	0	1
wayne	test.com	N/A	0	0	0
wayne	test.com	N/A	1	1	0
wendy	test.com	N/A	0	0	0
wendy	test.com	N/A	1	3	1
william	test.com	N/A	2	1	0

3. To display details, do one of the following:
- Click a value or the user's corresponding **manager** to display the [Contact Information on page 4-10](#) screen.
 - Click a value in the **Endpoint** column to view the [Endpoint details on page 4-14](#).
 - Click a value in the **Security Threats** column to open the [Security Threats Over Time and Security Threats Details widgets on page 4-8](#).
 - Click a value in the **Associated Policy** column to open the [Policy Status on page 4-9](#) screen and view details.

Security Threats

The Security Threats Over Time widget provides a graphical view of . The Security Threats Details provides a tabular view of The total data available coverage includes any threats detected over the past 90 days.

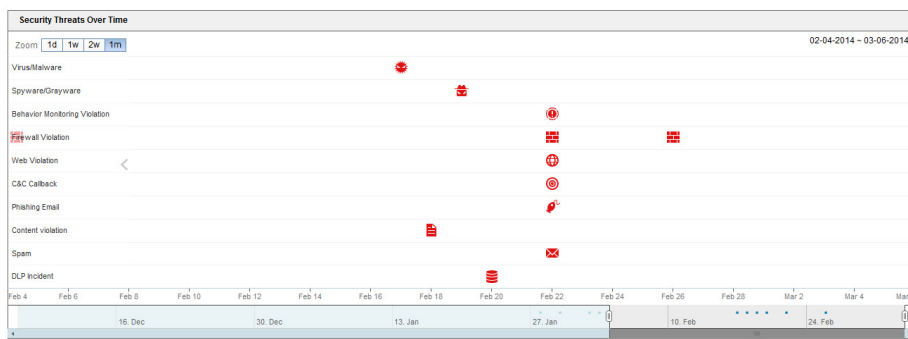

Policy Status

The **Policy Status** screen displays the list of policies associated with an endpoint, including the policy status, managed product where such policy originates, and the managed product's version and build.

Endpoint - WIN-80J6U8ABAPW				
Back to User/Endpoint Directory				
Policy Status	WIN-80J6U8ABAPW (Windows 2008)			
Installed Product	Version	build	Assigned Policy	Policy Status
OfficeScan Client	10.93	1079	OSCE	Deployed
OfficeScan Data Loss Prevention	10.93	1079	N/A	Without policy



Tip

Click the name of the assigned policy to open the specific policy page of the managed product and view/edit related settings.

For example, clicking the policy name **Mobile-Policy** opens an **Edit Policy** screen similar to the following:

← → ↻ [http://192.168.1.100:8080/ControlManager/PolicyManagement/EditPolicy.aspx?PolicyName=Mobile-Policy](#) ☆

Edit Policy [Help](#)

[Policy Management](#) > Edit Policy

Policy Name:

Targets: 3 target(s) [Manage Targets](#)

Mobile Security for Enterprise Settings: [Show Permissions](#)

- ▼ Common Settings
- ▼ Application Monitor & Control Settings
- ▼ Compliance Settings
- ▼ Certificate Settings
- ▼ Exchange ActiveSync Settings
- ▼ Encryption and Password Settings
- ▼ Feature Lock Settings
- ▼ Firewall Settings
- ▼ Call Filtering Settings
- ▼ Global HTTP Proxy Settings
- ▼ Malware Protection Settings

**Note**

In this example, if **User Henry** is not the policy creator, buttons that could trigger any changes to the policy (for example, **Set Filter**, **Manage Targets**, **Deploy**) are disabled on the **Edit Policy** screen. Only users with specific privileges can edit and save any changes to a policy.

Contact Information

The **Contact Information** screen displays user details, similar to the entries in Active Directory.

For example:

User - wendy

[< Back to User/Endpoint Directory](#)

Security Threats
Policy Status
Contact Information

Contact Information	
Title:	Sr.Engineer
Department:	RD-JP
Office:	Shibuya
Manager:	N/A
Office number:	021- -005
Home number:	005- -011
Email address:	wendy@ .com
Domain:	REPORT

Synchronizing Contact Information with Active Directory

Control Manager synchronizes data from the Active Directory Global Category (GC).

Procedure

1. Open the Microsoft Management Console (mmc).
2. Add a snap-in (Active Directory Schema).
3. In left panel, navigate to **Attribute**.
4. Enable **Replicate this attribute to Global Catalog** for each of the following:
 - **proxyAddresses**
 - **department**
 - **homephone**
 - **PhysicalDeliveryOfficeName**
 - **telephoneNumber**
 - **title**

5. Wait until Active Directory replication occurs.

Accessing the Endpoint Tree

Procedure

1. Access the Control Manager management console.
2. Navigate to **Directories > Users/Endpoints**.
3. Go to **Endpoints > All**.

A screen similar to the following appears:

Users All Custom Tags Custom Filters Endpoints All Custom Tags Filters Active Directory Endpoint Details (1/20)	Assign/Remove Custom Tags				
	Endpoint	Domain	IP Address	Type	Operating System
	rd-william	N/A	192.168.1.101	Laptop	Windows 2008
	rd-william	N/A	192.168.1.101	Laptop	Windows 2008
	rd-wendy	N/A	192.168.1.102	Laptop	Windows 2003
	rd-wendy	N/A	192.168.1.102	Laptop	Windows 2003
	lulinmac	N/A	192.168.1.103	Laptop	Mac OS
	lulin-phone	N/A	240.20.1.1234	Laptop	Android
	jp-yoko	N/A	192.168.1.104	Laptop	Windows 7
	jp-wayne	N/A	192.168.1.105	Laptop	Windows 8
	jp-space	N/A	192.168.1.106	Laptop	Windows 7
	jp-shizune	N/A	192.168.1.107	Laptop	Windows XP
	jp-patrick	N/A	192.168.1.108	Laptop	Windows Vista
	jp-kate_yao	N/A	192.168.1.109	Laptop	Windows 7
	jp-jessy	N/A	192.168.1.110	Laptop	Windows 7
	jp-char260	N/A	192.168.1.111	Laptop	Windows 7
	hikikimbp	N/A	192.168.1.112	Laptop	Mac OS

COLUMN NAME	DESCRIPTION
Endpoint	The host name or device name Click the value to display the Endpoint Details > Policy Status screen. Refer to Displaying Endpoint Details on page 4-14 for details.

COLUMN NAME	DESCRIPTION
Domain	If Active Directory integration is enabled, this corresponds to the name of the domain. Without Active Directory, the value in this column is N/A .
IP Address	The static or dynamic IP address of the endpoint
Type	Machine or device type: server, desktop, laptop, mobile device, and others
Operating System	The operating system running on the machine or device: supported Windows desktop/server systems, Mac OS, iOS, Android, Symbian, and Windows Mobile
User	The name or email address of the most recent user who logged on and/or use the endpoint.

What to do next

- Sort the results by clicking any of the column headers. The icon  placed next to the header indicates that the Endpoint table is sorted according to this column.
- You can perform [basic on page 4-22](#) or [advanced on page 4-23](#) search of endpoints.
- To automatically group endpoints by creating a [custom filter on page 4-29](#), refer to [Creating a Custom Filter on page 4-29](#).
- To manually group endpoints by creating a [custom tag on page 4-26](#), refer to [Creating a Custom Tag on page 4-26](#)

Policy Status

The **Policy Status** screen displays the list of policies associated with an endpoint, including the policy status, managed product where such policy originates, and the managed product's version and build.

Endpoint - jp-char260[< Back to User/Endpoint Directory](#)

Policy Status	▲ jp-char260				
Installed Product	Version	build	Assigned Policy	Policy Status	
OfficeScan Client	10.6	2108	OSCEPolicy	Pending	

**Tip**

Click the name of the assigned policy to open the specific policy page of the managed product and view/edit related settings.

For example, clicking the policy name [OSCEPolicy](#) opens an **Edit Policy** screen similar to the following:

Edit Policy[Policy Management](#) > Edit PolicyPolicy Name:

Targets: 5 target(s)

[Manage Targets](#)[Show Permissions](#)**OfficeScan Client Settings:**

▼ Additional Service Settings
▼ Behavior Monitoring Settings
▼ Device Control Settings
▼ Manual Scan Settings
▼ Privileges and Other Settings
▼ Real-time Scan Settings
▼ Spyware/Grayware Approved List
▼ Scan Methods
▼ Scan Now Settings

Displaying Endpoint Details


Procedure

1. *Access the Endpoint tree on page 4-12.*

2. Do one of the following:

- [Search for an endpoint on page 4-22.](#)
- Navigate to the **Endpoint** > **All** tree.

A screen similar to the following appears:

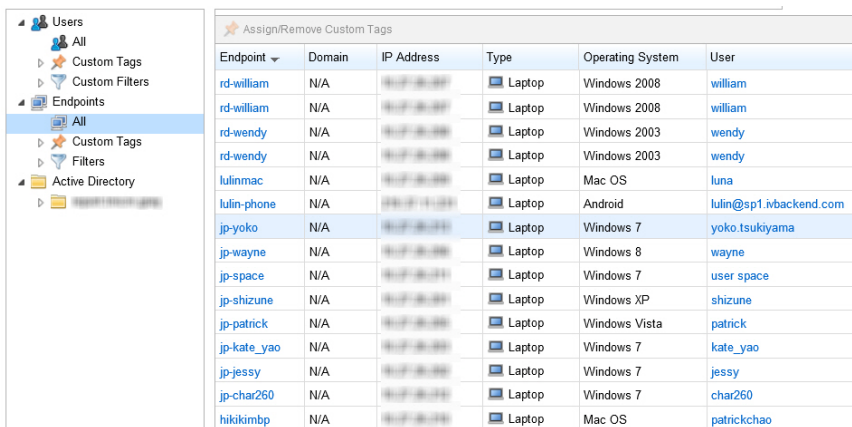

The screenshot shows a web interface with a left-hand navigation pane and a main content area. The navigation pane has a tree structure with 'Users' selected, containing sub-items like 'All', 'Custom Tags', 'Custom Filters', 'Endpoints', 'Active Directory', and 'Filters'. The 'Endpoints' item is expanded, showing 'All' as the selected view. The main content area has a title 'Assign/Remove Custom Tags' and a table with columns: Endpoint, Domain, IP Address, Type, Operating System, and User. The table lists various endpoints, including laptops and mobile phones, with their respective domains, IP addresses, types, operating systems, and user names.

Endpoint	Domain	IP Address	Type	Operating System	User
rd-william	N/A	192.168.1.101	Laptop	Windows 2008	william
rd-william	N/A	192.168.1.102	Laptop	Windows 2008	william
rd-wendy	N/A	192.168.1.103	Laptop	Windows 2003	wendy
rd-wendy	N/A	192.168.1.104	Laptop	Windows 2003	wendy
lulinmac	N/A	192.168.1.105	Laptop	Mac OS	luna
lulin-phone	N/A	192.168.1.106	Laptop	Android	lulin@sp1.nbackend.com
jp-yoko	N/A	192.168.1.107	Laptop	Windows 7	yoko.tsukiyama
jp-wayne	N/A	192.168.1.108	Laptop	Windows 8	wayne
jp-space	N/A	192.168.1.109	Laptop	Windows 7	user space
jp-shizune	N/A	192.168.1.110	Laptop	Windows XP	shizune
jp-patrick	N/A	192.168.1.111	Laptop	Windows Vista	patrick
jp-kate_yao	N/A	192.168.1.112	Laptop	Windows 7	kate_yao
jp-jessy	N/A	192.168.1.113	Laptop	Windows 7	jessy
jp-char260	N/A	192.168.1.114	Laptop	Windows 7	char260
hikikimb	N/A	192.168.1.115	Laptop	Mac OS	patrickchao

3. To display details, do one of the following:

- Click an **endpoint** to display the [Policy Status on page 4-13](#) screen.
- Click a **user** to display the [Contact Information on page 4-10](#) screen.

Understanding the Active Directory Synchronization

If your organization runs Active Directory and its organization meets your management needs, integrate with your Active Directory to populate and map the User/Endpoint Directory according to your existing organizational structure. Once synchronized, Control Manager updates the User/Endpoint Directory with any new users/groups from your Active Directory.

Take note of the following considerations when *enabling this feature on page 8-10*:

- Control Manager supports synchronization of Active Directory domains coming from the same forest.

The following example shows the **Active Directory** tree with multiple domains from the same forest:

User/Endpoint Directory

Search

- Users
 - All
 - Custom Tags
 - Custom Filters
 - Endpoints
 - All
 - Custom Tags
 - Filters
 - Active Directory
 - cm.com
 - m.com
 - e.com
 - mcm.com
 - Builtin
 - Computers
 - Domain Controllers
 - ForeignSecurityPrincipals
 - Managed Service Accounts
 - Program Data
 - QA
 - RD
 - System
 - Users

Assign/Remove Custom Tags

User	Domain	Manager
Administrator	cm.com	N/A
Administrator	cm.com	N/A
Administrator	cm.com	N/A
Administrator	cm.com	N/A
alex	cm.com	ben
Alex	cm.com	N/A
Allen	cm.com	N/A
Ben	cm.com	N/A
ben	cm.com	N/A
Ben	cm.com	N/A
Ben@cm.com	cm.com	N/A
Chris	cm.com	N/A
Doris	cm.com	N/A
Emily	cm.com	Ivy
Frank	cm.com	Ivy
Gary	cm.com	N/A
Henry@mcm.com	mcm.com	N/A

- If there are duplicate users created from endpoints as local users and Active Directory members, Control Manager removes duplicates by listing all Active Directory users.

**Note**

Control Manager consolidates all users—with duplicate and unique names. Having duplicate users listed in the **Users/Endpoint Directory** is possible because endpoints such as computers, servers, or laptops can have multiple local accounts with the same name.

To configure the Active Directory connection, refer to [Configuring Active Directory and Endpoint Protection Verification Widget Settings on page 8-10](#).

Accessing the Active Directory Tree

Before you begin

[Enable Active Directory synchronization on page 4-15](#) to view the Active Directory tree.

The Active Directory tree has the following characteristics:

- It varies depending on your network and organizational setup
- Provides two tabs, **Users** and **Endpoints**, to enable quick access to user or endpoint information and security details

Procedure

1. Access the Control Manager management console.
 2. Navigate to **Directories > Users/Endpoints**.
 3. Go to **Active Directory**, and expand the folders to display available items.
-

A screen similar to the following appears:

User/Endpoint Directory

[illegible]

Refer to the following table for details:

COLUMN NAME	DESCRIPTION
User	The name or email address of the user Click the name to open the User Details > Contact Information screen. Refer to Displaying User Details on page 4-7 for details.  Note With Active Directory integration disabled, the Users > All tree list all local users from various endpoints regardless of their duplicate status. Users having the same user names can occur as computers/servers/laptops can have multiple local users.
Domain	If Active Directory integration is enabled, this corresponds to the name of the domain. Without Active Directory, the value in this column reflects the endpoint name/host name.
Manager	The user's direct reporting manager, as saved in Active Directory

COLUMN NAME	DESCRIPTION
Endpoints	The number of endpoints, which a user is currently logged on.
Security Threats	The number of security threats detected over 90 days Click the value to display the User Details > Security Threats screen. Refer to Displaying User Details on page 4-7 for details. Control Manager counts and consolidates detections having these types of threats: • Virus/Malware • Spyware/Grayware • Content violation • Spam • Phishing email • Web violation • DLP incident • C&C callback • Behavior Monitoring violation • Firewall violation For example, while <i>Henry</i> is using endpoint <i>us-mkt-dev1</i>, there are 10 virus/malware detections and two web violations. Therefore, Henry's security threats count is 12.
Associated Policies	The number of Control Manager policies on page 17-2 assigned to the user Click the value to display the User Details > Policy Status screen. Refer to Displaying User Details on page 4-7 for details.

Troubleshooting Issues Related to Active Directory Integration

Active Directory integration allows you to manage Active Directory information through the [User/Endpoint Directory on page 4-1](#) of the Control Manager console.

In an event when an error appears on the **Dashboard**, refer to the following list to help try and troubleshoot the issue:

Procedure

- Network connectivity, including the network firewall settings

Ensure that both the Control Manager and Active Directory servers can establish communication with one another.

- User name and password to access the Active Directory server

Ensure that the [account information on page 8-10](#) used is correct and has enough privileges to access the Active Directory server.

- Control Manager database status and connectivity

Check whether the connection to the [Control Manager database on page 19-2](#) is present.

What to do next

If the issue persists, please contact [Support on page 23-2](#).

Searching for Users or Endpoints

Control Manager uses partial matching to conduct the following functionalities:

- [Basic search on page 4-22](#): quickly search for users or endpoints using a single keyword
- [Advanced search on page 4-23](#): include Boolean operators and multiple keywords based on the available user/endpoint categories



Tip

Refer to [Advanced Search Categories on page 4-21](#) for the list of categories available when performing a search.

Advanced Search Categories

Users

Use any of the following categories applicable to advanced searches:

TABLE 4-1. User Categories

CATEGORY	DESCRIPTION
User name	The first, last name, or account name of local users or people belonging to an Active Directory structure
Direct manager	The first, last, or account name of the person who users are assigned to report to
Location in Active Directory	The organization unit from which to begin your search
Department	The name of the department in your company that groups users based on their functionalities (for example, Accounting)

Endpoints

Use any of the following categories when searching for endpoints:

TABLE 4-2. Endpoint Categories

CATEGORY	DESCRIPTION
Endpoint name	The host or device name of the endpoint
IP address	The IPv4 address range  Note Searching by IPv4 segment requires a specific range starting with the first octet. The search returns all endpoints with IP addresses containing that entry.
Endpoint type	The type of computer or device: server, desktop, laptop, mobile device, or other

CATEGORY	DESCRIPTION
Operating system	The type of operating system: Windows XP, Windows Vista, Windows 7, Windows 8, Windows 2000, Windows 2003, Windows 2008, Windows 2012, Mac OS, iOS, Android, Symbian, Windows Mobile, or others
Location in Active Directory	The organization unit from which to begin your search

Using the Basic Search

Use this feature to quickly search for users or endpoints one keyword at a time. Control Manager uses partial matching when returning and displaying results.

Procedure

1. *Access the User/Endpoint Directory on page 4-3.*
2. On the top-most part of the screen, above the tree and working pane, click the **Search** drop-down list to search for users or endpoints.

User/Endpoint Directory

Search Users  [Advanced](#)

FIGURE 4-1. Basic user search

User/Endpoint Directory

Search Endpoints  [Advanced](#)

FIGURE 4-2. Basic endpoint search



Note

Control Manager can only search for IPv4 addresses.

3. Type the keywords in the field provided.

For example, use the *user name* or *email address* criterion to search for users having the same mail server (like @yourdomain.com)

**Tip**

To search for endpoints based on an IPv4 range, use [Advanced on page 4-23](#) search.

4. Press **Enter** or the Search icon



The entries that match the characters you typed are displayed. Control Manager filters users or endpoints from the **Users**, **Endpoints**, or **Active Directory** tree that partially match the keywords entered.

Related information

↳ [Using the Advanced Search](#)

Using the Advanced Search

This feature provides the following functionalities:

- Search using operators that allow you to find an item from your tree quickly and accurately
- Set up filters so that you can organize your tree automatically

Procedure

1. Search for users or endpoints. Refer to [Using the Basic Search on page 4-22](#) for steps.

Refer to [Advanced Search Categories on page 4-21](#) for the list of categories available when performing a search.

2. Click

[Advanced](#)

.

3. Use any or all of the following Boolean operators:

- **AND**: all conditions must exactly match to display the results
- **OR**: any of the matching conditions will prompt Control Manager to display the results

4. Click **Search** to display results.

Alternatively, click **Save as New Custom Filter** to use the specified criteria to build the new custom filter. Doing so will prompt Control Manager to automatically group users or endpoints that match your specified criteria into this new custom filter.

For example, to search for laptops running Microsoft Windows 7, follow these settings:

The screenshot shows a search interface with the following elements:

- A "Search" label followed by a dropdown menu set to "Endpoints".
- A second dropdown menu set to "Endpoint Type".
- A text input field containing "Laptop".
- A dropdown arrow next to the "Laptop" field.
- A red "X" icon and a blue "OR" link.
- The word "AND" in blue.
- A third dropdown menu set to "Operating System".
- A text input field containing "Windows 7".
- A dropdown arrow next to the "Windows 7" field.
- A red "X" icon and blue "OR AND" links.
- A dashed horizontal line separating the criteria from the buttons.
- Two buttons at the bottom: "Search" and "Save as New Custom Filter".

Understanding Custom Tags and Filters

With tags or filters, you can:

- View a list of users and actionable information such as associated security threats, policy status, and contact information per user
- View a list of endpoints and policy status per endpoint
- View a timeline chart for incident investigation

**Tip**

The **User Access Information** in an ad hoc query (see [Understanding Ad Hoc Queries on page 11-11](#)) provides details about any user modifications related to any available custom tags or filters.

General Recommendations

Tagging or filtering users or endpoints depend on your network and management needs, along with your business plans. As general recommendations:

- The **User Access Information** in an ad hoc query (see [Understanding Ad Hoc Queries on page 11-11](#)) provides details about any user modifications related to any available custom tags or filters
- Group users based on your Active Directory organization
- Group endpoints based on their location (that is, their IP ranges)
- Group users or endpoints with similar properties or characteristics

For example: who manages a group of users, who accesses a group of servers, endpoints with the same operating system type or host names

- Group users or endpoints based on any other criteria that support your needs

For example, it is a common practice to divide networks according to the roles of those using the network—Marketing, Finance, Human Resources, Product Development, etc.

**Tip**

Plan your User/Endpoint Directory structure and consider your network environment to simplify maintenance—especially for an enterprise with a large network.

Manually tag users or endpoints showing a specific behavior. For example, as the network administrator for Company ABC, Joni sees similar malware behavior resulting from laptops XYZ and 123. She can then tag laptops XYZ and 123 for easy identification.

Consequently, create filters to group users or endpoints based on specific known characteristics. For example, filter users based on who their manager is. You can then associate a filter to those users having the same manager.

Working with Custom Tags

Custom tags are labels that you can manually associate with one or more users/endpoints. Create custom labels to group certain users or endpoints. Control Manager offers the following features related to tags:

- By default, all users and endpoints have no tags association
- Manually apply one or more tags to one or more users/endpoints
- All users with access to the User/Endpoint Directory can create/edit/delete/view tags



Note

A user can only delete or modify the tags he/she created.


- Only the user account that installed Control Manager can delete/modify/view all users' tags

For example, the `Root` account.

Creating a Custom Tag

Procedure

1. [Access the User/Endpoint Directory on page 4-3](#), and then navigate to the **Users** or **Endpoints** tree.
2. Do one of the following:
 - From the User/Endpoint Directory pane:

- a. Navigate to the **Custom Tags** node, and then click .
 - b. Type a descriptive name, and press Enter or click  to save the new tag.
- From the list of the **All** users/endpoints displayed on the working pane:
 - a. Click anywhere on the user or endpoint row, and then click .
 - Alternatively, right-click anywhere on the row, and then select **Assign/Remove Custom Tags** from the popup menu.
 - b. On the **Assign/Remove Custom Tags** dialog, type a descriptive **name**, and then click **Save**.

**Note**

If you click the link on the **User** or **Endpoint** column, a screen displaying details about that item appears.

The tag is added to the list of tags under the corresponding **User** or **Endpoint** tree.

What to do next

Click the



icon on any custom tag to edit the tag name.

Deleting a Custom Tag

Procedure

1. [Access the User/Endpoint Directory on page 4-3](#), and then navigate to the **Users** or **Endpoints** tree.
2. On the tree pane, hover your mouse over the tag that you want to delete, and then click



.

The tag is deleted from the list of **Custom Tags** under the corresponding **User** or **Endpoint** tree.

Applying a Custom Tag to Selected Users/Endpoints

Procedure

1. [Access the User/Endpoint Directory on page 4-3](#), and then navigate to the **Users** or **Endpoints** tree.
2. Select the user or endpoint, and then right-click or click **Assign/Remove Custom Tags** to select a tag (or more than one tags) from the dialog. Alternatively, you can create a new tag and assign the new tag to selected users/endpoints.



Note

Use **Ctrl + Click** to select multiple users/endpoints.

-
3. In the **Assign/Remove Custom Tags** dialog, select the desired tag(s) from the list, and then click **Save**.
-

Verify that certain users or endpoints are associated with a tag. Select a tag from the **Customs Tags** list, and then ensure that the user or endpoint you have just associated is listed.

Disassociating a Custom Tag from Selected Users/Endpoints

Procedure

1. *Access the User/Endpoint Directory on page 4-3*, and then navigate to the **Users** or **Endpoints** tree.
2. Click **Assign/Remove Custom Tags** or right-click the user or endpoint, and then select **Assign/Remove Custom Tags**.
3. In the **Assign/Remove Custom Tags** dialog, deselect the desired tag(s) from the list, and then click **Save**.

Verify that certain users or endpoints are no longer associated with a tag. Select a tag from the **Customs Tags** list, and then ensure that the user or endpoint you have just disassociated is not listed.

Working with Custom Filters

Custom filters allow you to automatically group users or endpoints having the same criteria. The **Users** tree can group users based on their name, direct manager, location in Active Directory or organization unit, and policy status. The **Endpoints** tree can group computing devices based on their name, IP address, type, operating system, or location in Active Directory.


By default, the **Endpoints** tree provides **Endpoint Type** and **Operating System** as preset filters.

Creating a Custom Filter

Procedure

1. *Access the User/Endpoint Directory on page 4-3*, and then navigate to the **Users** or **Endpoints** tree.

2. Navigate to the **Custom Filters** folder, and then click




3. Do one of the following:

- To filter users, select from any of available characteristics: **user name**, **direct manager**, **location in Active Directory**, and **department**.
- To filter endpoints, select from any of the available characteristics: **host name** or **device name**, **IP address**, **type**, **operating system**, and **location in Active Directory**

Refer to *Advanced Search Categories on page 4-21* for the list of categories available when performing a search.

The following example filters all "Ja" users in the Active Directory
w12p.tcm.co:

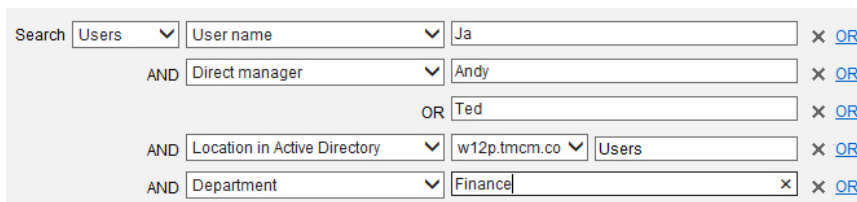A screenshot of a search filter configuration interface. It shows a series of conditions connected by AND and OR operators. The first condition is "Users" (selected from a dropdown) with "User name" (selected from a dropdown) equal to "Ja". The second condition is "Direct manager" (selected from a dropdown) equal to "Andy". The third condition is "Location in Active Directory" (selected from a dropdown) equal to "w12p.tcm.co" AND "Users" (selected from a dropdown). The fourth condition is "Department" (selected from a dropdown) equal to "Finance". Each condition has a delete icon (X) and a link icon (OR) to its right.

Search	Users	User name	Ja	X	OR
	AND	Direct manager	Andy	X	OR
		OR	Ted	X	OR
	AND	Location in Active Directory	w12p.tcm.co	X	OR
		Users		X	OR
	AND	Department	Finance	X	OR

What to do next

Click the



icon on any custom filter to edit the filter name. To update the Boolean expressions per custom filter, click



and update the condition(s).

Deleting a Custom Filter

Procedure

1. [Access the User/Endpoint Directory on page 4-3](#), and then navigate to the **Users** or **Endpoints** tree.
2. On the tree pane, hover your mouse over the custom filter that you want to delete, and then click



.

The custom filter is deleted from the list of **Custom Filters** under the corresponding **User** or **Endpoint** tree.

Chapter 5

Product Directory Basics

The Product Directory displays all managed products registered to a Control Manager server.

This chapter contains the following topics:

- *Understanding the Product Directory on page 5-2*
- *Grouping Managed Products Using Directory Management on page 5-3*
- *Understanding Cascading Management on page 5-9*
- *Registering or Unregistering Child Servers on page 16-3*

Understanding the Product Directory

A managed product is a representation of an antivirus, content security, or web protection product in the Product Directory. Managed products display as icons (for example,  or ) in the Control Manager web console **Product Directory** section. These icons represent Trend Micro antivirus, content security, and web protection products. Control Manager supports dynamic icons, which change with the status of the managed product. See your managed product's documentation for more information on the icons and associated statuses for your managed product.

Indirectly administer the managed products either individually or by groups through the Product Directory. The following table lists the menu items and buttons on the **Product Directory** screen.

TABLE 5-1. Product Directory Options

OPTIONS	DESCRIPTION
Menu Items	
Advanced Search	Click this menu item to specify search criteria to perform a search for one or more managed products.
Configure	After selecting a managed product/directory, move the cursor over this menu item and select a task, to log on to a web-based console using SSO or to configure a managed product.
Tasks	After selecting a managed product/directory, move the cursor over this menu item and select a task, to perform a specific function (such as deploying the latest components) to a specific managed product or child server or groups of managed products or child servers. Initiate a task from a directory and Control Manager sends requests to all managed products belonging to that directory.
Directory Management	Click this button to open the Directory Management screen. From the screen, move entities/directories (by dragging and dropping them) or create new directories.
Buttons	

OPTIONS	DESCRIPTION
Search	Click this button, after typing a managed product's name, to perform a search for the specified managed product.
Status	Click this button, after selecting a managed product/directory, to obtain status summaries about the managed product or managed products found in the directory.
Folder	Click this button, after selecting a directory, to obtain status summaries about the managed products and the managed product endpoints found in the directory.

**Note**

Managed products belonging to child Control Manager servers cannot have tasks issued to them by the parent Control Manager server.

Grouping Managed Products Using Directory Management

Use the **Directory Management** screen to customize the Product Directory organization to suit your administration model's needs. For example, you can group products by location or product type (messaging security, web security, file storage protection).

Group managed products according to geographical, administrative, or product specific reasons. In combination with different access rights used to access managed products or folders in the directory, the following table presents the recommended grouping types as well as their advantages and disadvantages:

TABLE 5-2. Advantages and Disadvantages when Grouping Managed Products

GROUPING TYPE	ADVANTAGE	DISADVANTAGE
Geographical or Administrative	Clear structure	No group configuration for identical products

GROUPING TYPE	ADVANTAGE	DISADVANTAGE
Product type	Group configuration and status is available	Access rights may not match
Combination of both	Group configuration and access right management	Complex structure, may not be easy to manage

Product Directory Structure Recommendations

Trend Micro recommends the following when planning your Product Directory structure for managed products and child servers:

TABLE 5-3. Considerations when Grouping Managed Products or Child Servers

STRUCTURE	DESCRIPTION
Company network and security policies	If different access and sharing rights apply to the company network, group managed products and child servers according to company network and security policies.
Organization and function	Group managed products and child servers according to the company's organizational and functional division. For example, have two Control Manager servers that manage the production and testing groups.
Geographical location	Use geographical location as a grouping criterion if the location of the managed products and child servers affects the communication between the Control Manager server and its managed products or child servers.
Administrative responsibility	Group managed products and child servers according to system or security personnel assigned to them. This allows group configuration.

The Product Directory provides a user-specified grouping of managed products which allows you to perform the following for administering managed products:

- Configuring managed products
- Request products to perform a Scan Now (if this command is supported)


- View product information, as well as details about its operating environment (for example, product version, pattern file and scan engine versions, operating system information, and so on)
- View product-level logs
- Deploy virus pattern, scan engine, anti-spam rule, and program updates

Plan this structure carefully, because the structure also affects the following:

TABLE 5-4. Considerations for the Structure

CONSIDER	EFFECT
User access	When creating user accounts, Control Manager prompts for the segment of the Product Directory that the user can access. For example, granting access to the root segment grants access to the entire directory. Granting access to a specific managed product only grants access to that specific product.
Deployment planning	Control Manager deploys update components (for example, virus pattern files, scan engines, anti-spam rules, program updates) to products based on Deployment Plans. These plans deploy to Product Directory folders, rather than individual products. A well-structured directory therefore simplifies the designation of recipients.
Outbreak Prevention Policy (OPP) and Damage Control Template (DCT) deployments	OPP and DCT deployments depend on Deployment Plans for efficient distribution of Outbreak Prevention Policy and cleanup tasks.

A sample Product Directory appears below:

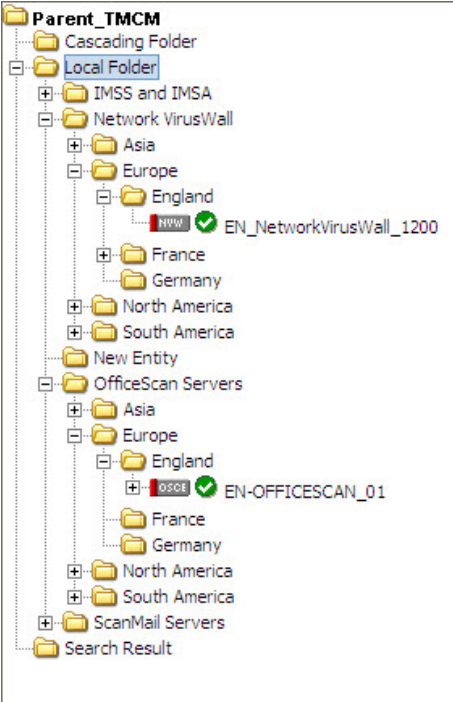

Managed products identify the registered antivirus or content security product, as well as provide the connection status.

 **Note**

All newly registered managed products usually appear in the New Entity folder regardless of the agent type.

TABLE 5-5. Managed Product Icons

ICON	DESCRIPTION
	InterScan eManager
	OfficeScan Corporate Edition
	ServerProtect Information Server
	ServerProtect Domain
	ServerProtect for Windows (Normal Server)

ICON	DESCRIPTION
	ServerProtect for NetWare (Normal Server)
	InterScan Messaging Security Suite
	InterScan Web Security Suite
	InterScan VirusWall for Windows
	InterScan VirusWall for UNIX
	ScanMail for Microsoft Exchange
	ScanMail for Lotus Notes
	Network VirusWall
	NetScreen Global PRO Firewall
	Managed Product connection status icon

Arrange the Product Directory using the Directory Manager. Use descriptive folder names to group your managed products according to their protection type or the Control Manager network administration model.

Default Folders for the Product Directory

After a fresh Control Manager installation, the Product Directory initially consists of the following directories:

TABLE 5-6. Product Directory Default Folders

STRUCTURE	DESCRIPTION
Root	All managed products and child Control Manager servers fall under the Root directory.
Cascading Folder	In a cascading environment, all child servers for the parent server appear in the Cascading Folder.

STRUCTURE	DESCRIPTION
Local Folder > New Entity	Newly registered managed products handled by Control Manager agents usually appear in the New Entity folder.
Search Result	When performing a basic or advanced search, all managed products that fit the search criteria display in the Search Result folder.

Accessing the Product Directory

Use the Product Directory to administer managed products registered to the Control Manager server.



Note

Viewing and accessing the folders in the Product Directory depends on the Account Type and user account access rights.

Procedure

- Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

Understanding Cascading Management

Control Manager Advanced provides a cascading management structure, which allows control of multiple Control Manager servers, known as child servers, from a single parent server.

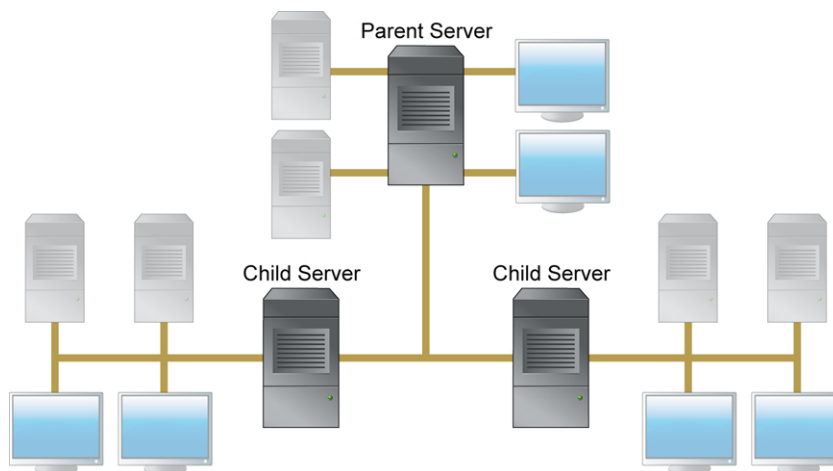


FIGURE 5-1. The cascading management structure uses two-tier parent-child architecture

A parent server is a Control Manager server that manages Standard or Advanced Edition Control Manager servers, referred to as child servers. A child server is a Control Manager server managed by a parent server.



Note

Control Manager 6.0 Service Pack 1 Advanced supports the following as child Control Manager servers:

- Control Manager 6.0 Advanced
- Control Manager 5.5 Advanced
- Control Manager 5.0 Advanced

Control Manager 5.0/5.5/6.0 Standard servers cannot be child servers.

TABLE 5-7. Parent and Child Server Feature Comparison

FEATURE	AVAILABLE IN PARENT	AVAILABLE IN CHILD
Support two-tier cascading structure	●	●
Manage Advanced servers	●	
Administer managed products	●	●
Handle multiple child servers	●	
Issue global tasks	●	
Create global reports	●	

**Note**

A parent server cannot register itself to another parent server. In addition, both parent and child servers cannot perform dual roles (become a parent and child server at the same time).

The Product Directory structure, using the Control Manager web console, allows system administrators to manage, monitor, and perform the following actions on all child servers belonging to a parent server:

- Using Control Manager widgets, monitor the Antivirus, Content Security, and Web Security summaries
- Query logs
- Initiate tasks
- View reports
- Access the child server web console

The Product Directory structure can effectively manage your organization's antivirus and content security products (nationwide or worldwide).

Chapter 6

Working with Managed Servers

The **Managed Servers** screen shows the servers administrators can manage using policy management.

This chapter contains the following topics:

- *Understanding Managed Servers on page 6-2*
- *Adding a Server on page 6-3*
- *Editing a Server on page 6-5*
- *Configuring Proxy Settings for Managed Products on page 6-6*
- *Configuring the Cloud Service Settings on page 6-7*
- *Stop Managing Cloud Services on page 6-10*

Understanding Managed Servers

Use the **Managed Servers** screen to add and edit managed products.

**Note**

When the **Add** button is disabled, this implies that the managed product is registered using the MCP agent.

For managed products, Control Manager uses the Single Sign-on (SSO) function to access these products by default.

**Note**

Control Manager is able to support solutions with or without management consoles. Those products or services having their own consoles use SSO.

Administrators can edit the authentication information for the following reasons:

- The SSO function does not function properly
- Administrators want to access the managed product using another account

TABLE 6-1. Managed Server List

MENU ITEM	DESCRIPTION
Server	Displays the server name of the managed product.
Display Name	Displays the server display name of the managed product.
Product	Displays the name of the managed product.

MENU ITEM	DESCRIPTION
Connection Type	Displays how the managed product registers to Control Manager. • Automatic: The managed product registers to Control Manager through an MCP agent. • Manual: Administrators manually added the managed product to the Managed Servers screen. • Cloud Service: Corresponds to the SaaS solutions that can be managed by Control Manager.  Note As of the Control Manager 6.0 Service Pack 1 release, Managed Servers can support Hosted Email Security, InterScan Web Security as a Service, and Worry-Free Business Security Services. A managed product's connection type is Cloud Service if it is registered through Cloud Service Settings. See details in Configuring the Cloud Service Settings on page 6-7.
Last Report	Shows the date and time when Control Manager received a response from the managed product.
Actions	• Edit: Click this icon to update the server information. • Delete: Click this icon to delete a manually added server.

Adding a Server

Procedure

1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

Managed Servers Help

Server Type: Hosted Email Security

Add
 Refresh
 Proxy Settings
 Cloud Service Settings
 Directory Management

Server	Display Name	Product	Connection Type	Last Report	Actions
https://ui.hes20-ui-beta.trendmicro.eu/ui/server/ssologin?TenantID=TM	Hosted Email Security	Hosted Email Security 2.0	Cloud Service	03/03/2014 01:55 am	

Records: 1 - 1 / 1 Page 1 / 1 10 per page

2. Select a server type.

3. Click **Add**.

The **Add Server** screen appears.

4. Type the server name in the **Server** field.

5. Specify a **display name** in the field provided.

6. Provide the **user name** and **password** for the managed product.

An account with administrator privileges is required for Control Manager to deploy policy settings.

7. Select **Use a proxy server for the connection**.

See *Configuring Proxy Settings for Managed Products on page 6-6* for details about setting up the proxy server connection.

8. Click **Save**.



Note

To perform policy management on a new managed product, move the managed product from the **New Entity** folder to another folder in the **Directory Management**.

Editing a Server

Procedure

1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

2. Select a server type.
 3. Click the **Edit** icon in the **Actions** column.
 4. Edit the server information.
 5. Click **Save**.
-

Deleting a Server

Procedure

1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

2. Select a server type.
 3. Click the **Delete** icon in the **Actions** column.
 4. Agree to the prompt to continue.
-

The deleted server is removed from the list. The server program and related agents remain intact. However, they no longer report any information to Control Manager.

Configuring Proxy Settings for Managed Products


Use a proxy server to connect to the managed products.

Procedure

1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

2. Click **Proxy Settings**.

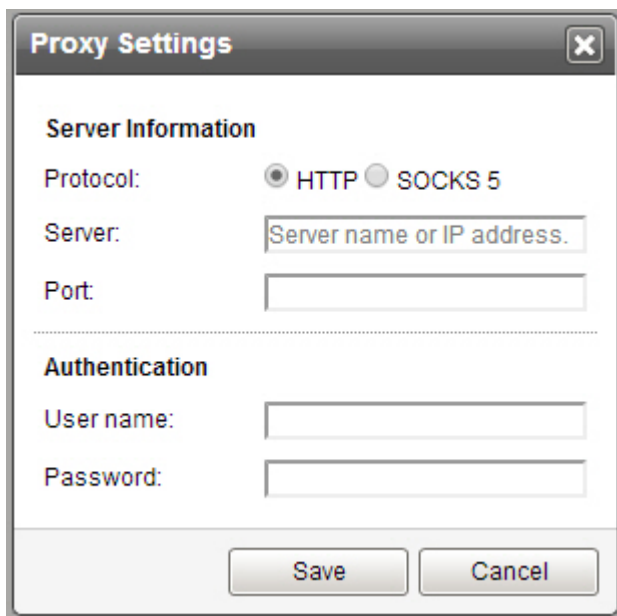The image shows a 'Proxy Settings' dialog box with a title bar and a close button. It is divided into two sections: 'Server Information' and 'Authentication'. In the 'Server Information' section, there are radio buttons for 'HTTP' (selected) and 'SOCKS 5'. Below these are text input fields for 'Server:' (containing the placeholder text 'Server name or IP address.') and 'Port:'. The 'Authentication' section contains text input fields for 'User name:' and 'Password:'. At the bottom of the dialog are 'Save' and 'Cancel' buttons.

Proxy Settings

Server Information

Protocol: ☒ HTTP ☐ SOCKS 5

Server:

Port:

Authentication

User name:

Password:

3. Select the protocol:
 - **HTTP**
 - **SOCKS 5**

4. Type the server name in the **Server** field.
 5. Type the port number in the **Port** field.
 6. Type the user name and password to access the server if it requires authentication.
 7. Click **Save**.
-

Configuring the Cloud Service Settings


Use the **Managed Servers** screen to register or unregister any of your SaaS solutions as one of the managed cloud services in Control Manager.

Procedure


1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

2. Click



The following **Cloud Service Settings** dialog appears:

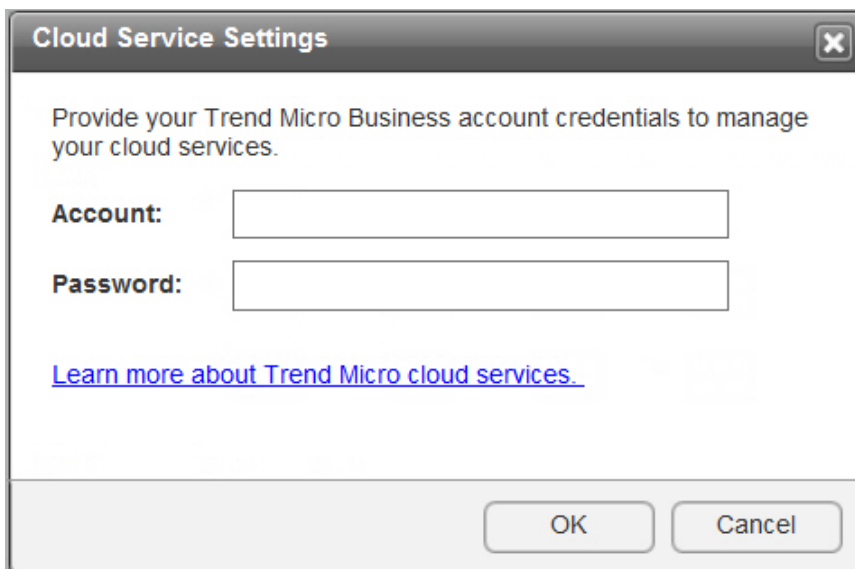A screenshot of a Windows-style dialog box titled "Cloud Service Settings". The dialog has a dark gray title bar with a close button (X) in the top right corner. The main area is white and contains the text "Provide your Trend Micro Business account credentials to manage your cloud services." Below this text are two input fields: "Account:" and "Password:". Below the input fields is a blue hyperlink that reads "Learn more about Trend Micro cloud services.". At the bottom of the dialog, there are two buttons: "OK" and "Cancel".

Cloud Service Settings

Provide your Trend Micro Business account credentials to manage your cloud services.

Account:

Password:

[Learn more about Trend Micro cloud services.](#)

OK Cancel

3. Supply the following details:
 - **Account:** user name set via the [Trend Micro Customer Licensing Portal](#) during activation of your service subscription
 - **Password:** password for this account
4. Click **OK** to save.

After configuring the cloud service settings, the Managed Servers list displays information related to the managed cloud service solution that Control Manager obtains from using the account you provided.

For example, if you have set Control Manager to administer your Hosted Email Security subscription, a screen similar to the following appears:

Managed Servers

Server Type: Hosted Email Security

Add

Refresh

Proxy Settings

Cloud Service Settings

Directory Management

Server	Display Name	Product	Connection Type	Last Report	Actions
https://ui.hes20-ui-beta.trendmicro.eu/ui/server/ssologin?TenantID=TM	Hosted Email Security	Hosted Email Security 2.0	Cloud Service	03/03/2014 01:55 am	

Records: 1 - 1 / 1

◀

Page 1

/ 1

▶


10 ▼

per page

Records: 1 - 1 / 1 | Page 1 / 1 | 10 per page

What to do next

In case your account's subscription to a particular cloud service ends, use a dialog similar to the following to configure Control Manager to stop managing such service (refer to *Stop Managing Cloud Services on page 6-10* for detailed steps.):

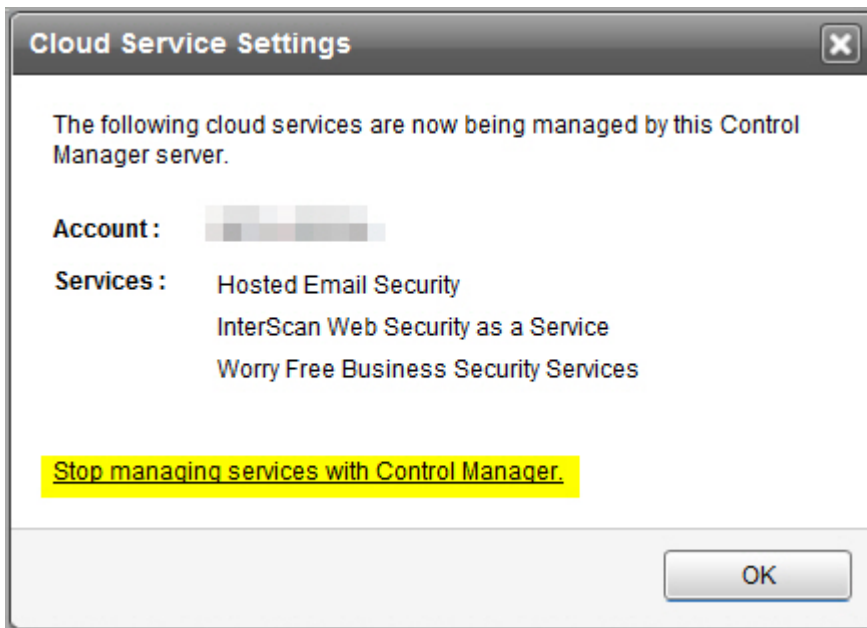

Stop Managing Cloud Services

Stopping a cloud service management is manually triggered when any of the following events is true:

- Your account's subscription to a particular cloud service ends
- You would like to administer a cloud service from another Control Manager server.

For example, InterScan Web Security as a Service is initially managed by *CM-server-cupertino*. Because of new organization changes and processes, *CM-server-tokyo* is delegated to administer all SaaS solutions. In this case, after completing the steps below, ensure that you configure the cloud service settings on *CM-server-tokyo*.


Procedure

1. Navigate to **Administration > Managed Servers**.

The **Managed Servers** screen appears.

2. Click **Cloud Service Settings**.

A dialog similar to the following appears:

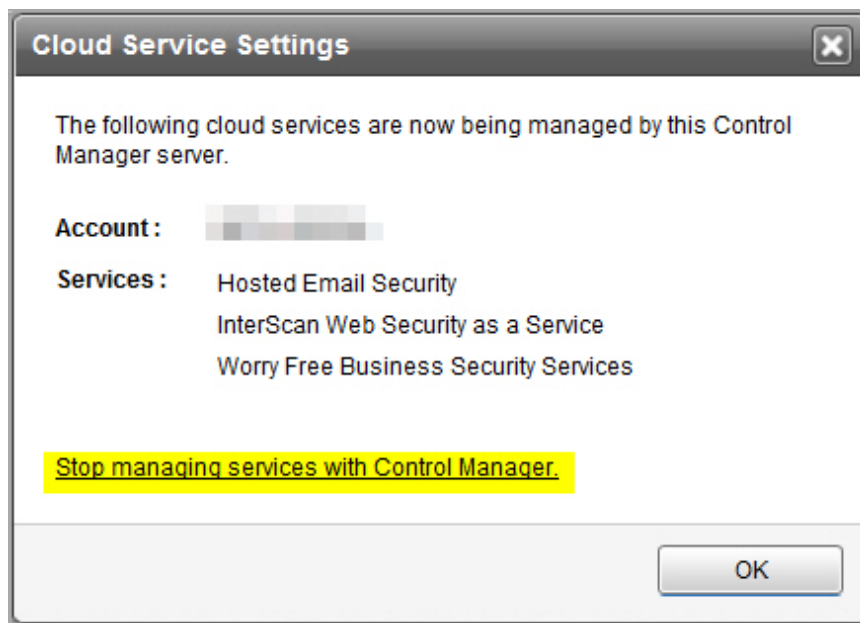

3. Click **Stop managing services with Control Manager**, and agree to all succeeding prompts to stop managing SaaS solutions through Control Manager.

The **Managed Servers** list should no longer display the stopped cloud service.

Chapter 7

Downloading and Deploying Components

The Product Directory displays all managed products registered to a Control Manager server.

This chapter contains the following topics:

- *Downloading and Deploying New Components on page 7-2*
- *Manually Downloading Components on page 7-4*
- *Understanding Scheduled Download Exceptions on page 7-11*
- *Configuring Scheduled Downloads on page 7-12*
- *Understanding Deployment Plans on page 7-23*
- *Configuring the Proxy Settings for Component Updates on page 7-28*
- *Configuring Update/Deployment Settings on page 7-29*

Downloading and Deploying New Components

Trend Micro recommends updating the antivirus and content security components to remain protected against the latest virus and malware threats.

By default, Control Manager enables download only on components belonging to managed products registered to the Control Manager server. Control Manager enables virus pattern download even if no managed products are registered to the Control Manager server.

The following are the components to update (listed according to the frequency of recommended update).

TABLE 7-1. Available Components

COMPONENT	DESCRIPTION
Pattern files/ Cleanup templates	Pattern files/Cleanup templates contain hundreds of malware signatures (for example, viruses or Trojans) and determine the managed product's ability to detect and clean malicious file infections
Antispam rules	Antispam rules are the Trend Micro-provided files used for antispam and content filtering
Engines	Engines refer to virus/malware scan engines, Damage Cleanup engine, VirusWall engines, the Spyware/Grayware engine and so on. These components perform the actual scanning and cleaning functions.

COMPONENT	DESCRIPTION
OfficeScan Plug-in Programs	OfficeScan Plug-in Programs (for example, Trend Micro Security for Mac).  Note The OfficeScan web console displays all available Plug-in Programs. You can specify to download any of them from Control Manager. However, Control Manager may not have the downloaded the Plug-in Program. Which means that OfficeScan cannot download the specified Plug-in Program from Control Manager. Before specifying a Plug-in Program for download, from Control Manager to OfficeScan, verify that Control Manager has already downloaded the Plug-in Program.
Product programs and widget pool	Product-specific components (for example, Service Pack releases) and the Control Manager widget pool



Note

Only registered users are eligible for components update.

To minimize Control Manager network traffic, disable the download of components that have no corresponding managed product.

The **Component List** screen presents a full list of all components that Control Manager has available for managed products. The list also matches components with managed

products that use the component. Click **Updates > Component List** to open the **Component List** screen.

Component List

1- 10 of 137 4 Page 1 of 14

Component Name	Type	Products Using Component
16-bit DLL	Engine	2 Products
32-bit DLL (95/98/Me)	Engine	0 Products
32-bit DLL (NT/2000)	Engine	14 Products
Anti-rootkit Driver (64-bit)	Engine	0 Products
Anti-rootkit Driver (32-bit)	Engine	0 Products
Antispam Engine (AIX 64-bit)	Engine	0 Products
Antispam Engine (Enterprise Linux, 32-bit)	Engine	0 Products
Antispam Engine (Linux)	Engine	0 Products
Antispam Engine (Solaris)	Engine	0 Products
Antispam Engine (VS2005 32-bit)	Engine	0 Products

1-10 of 137 4 Page 1 of 14

Rows per page: 10

FIGURE 7-1. The Component List screen

The Control Manager server only retains the latest component version. You can trace a component's version history by viewing root>:\Program Files\Trend Micro\Control Manager\AU_log\TmuDump.txt entries. TmuDump.txt generates when ActiveUpdate debugging is enabled.

**Tip**

To minimize Control Manager network traffic, disable the download of components that have no corresponding managed products or services. When you register managed products or activate services at a later time, be sure to configure the manual or scheduled download of applicable components.

Manually Downloading Components

Manually download component updates when you initially install Control Manager, when your network is under attack, or when you want to test new components before deploying the components to your network.

Trend Micro recommends the following method to configure manual downloads. Manually downloading components requires multiple steps:



Tip

Ignore steps 1 and 2 if you have already configured your deployment plan and configured your proxy settings.

Step 1: Configure a Deployment Plan for Your Components

Procedure

1. Navigate to **Updates > Deployment Plan**.

The **Deployment Plan** screen appears.

Deployment Plan

Use Deployment Plans to set the priority that managed products are updated. It is composed of one or more schedules that are used when the plan is selected.

AddCopyDelete

1- 2 of 2 H Page 1 of 1 H

☐ Plan

☐ Deploy to All Managed Products Now (Default)

☐ Deploy to All Immediately (Outbreak-Prevention)

AddCopyDelete

1- 2 of 2 H Page 1 of 1 H

Rows per page: 10

2. Click **Add**.

The **Add New Plan** screen appears.

Add New Plan

If the auto-deploy option is selected in either Manual or Scheduled Download, the deployment will be performed based on the schedules shown below.

Deployment Plan

Name*:

Deployment Plan Schedules

AddDelete

0- 0 of 0 H Page 0 of 0 H

☐ Destination

Deployment Time

AddDelete

0- 0 of 0 H Page 0 of 0 H

Rows per page: 10

Save

Cancel

3. Type a deployment plan name in the **Name** field.
4. Click **Add** to provide deployment plan details.

The **Add New Schedule** screen appears.

Add New Schedule Help

Deployment Plan Schedule

Deployment time: ☒ Start at: 00 : 00 (hh:mm) ☐ Delay: 0 hours 0 minutes

Select targets*: The folders you see depend on the folder access rights you have been given.

- YUNATEST
 - Cascading Folder
 - Local Folder

Save Cancel


5. On the **Add New Schedule** screen, choose a deployment time schedule by selecting one of the following options:
 - **Start at:** Performs the deployment at a specific time.
Use the menus to designate the time in hours and minutes.
 - **Delay:** after Control Manager downloads the update components, Control Manager delays the deployment according to the interval that you specify.
Use the menus to indicate the duration, in terms of hours and minutes.
 6. Select the Product Directory folder to which the schedule will apply. Control Manager assigns the schedule to all the products under the selected folder.
 7. Click **Save**.
The **Add New Plan** screen appears.
 8. Click **Save** to apply the new deployment plan.
-

Step 2: Configure Your Proxy Settings (If You Use a Proxy Server)

Procedure

1. Navigate to **Administration > Settings > Proxy Settings**.

The **Connection Settings** screen appears.

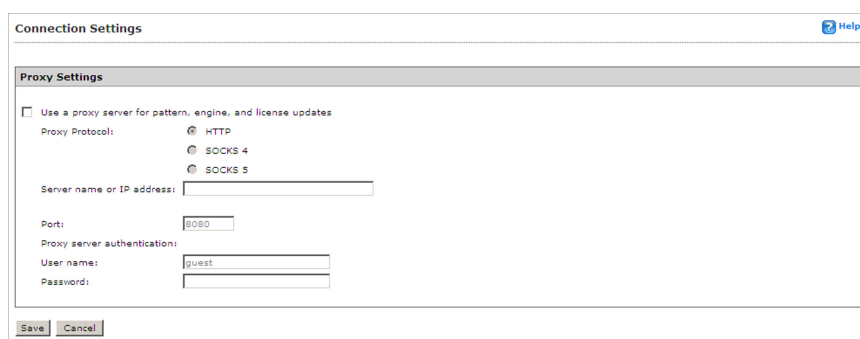

The screenshot shows a window titled "Connection Settings" with a "Help" icon in the top right corner. Inside the window is a section titled "Proxy Settings". At the top of this section is a checkbox labeled "Use a proxy server for pattern, engine, and license updates". Below this checkbox are three radio buttons for "Proxy Protocol": "HTTP", "SOCKS 4", and "SOCKS 5". Below the radio buttons is a text field labeled "Server name or IP address:". Below that is a "Port:" label followed by a text field containing "8080". Underneath is a "Proxy server authentication:" section with two text fields: "User name:" containing "guest" and "Password:". At the bottom of the dialog are "Save" and "Cancel" buttons.

2. Select **Use a proxy server for pattern, engine, and license updates**.
 3. Select the protocol:
 - **HTTP**
 - **SOCKS 4**
 - **SOCKS 5**
 4. Type the host name or IP address of the server in the **Server name or IP address** field.
 5. Type a port number in the **Port** field.
 6. Type a log on name and password if your server requires authentication.
 7. Click **Save**.
-

Step 3: Select the Components to Update

Procedure

1. Navigate to **Updates > Manual Download**.

The **Manual Download** screen appears.

Manual Download Help

Perform manual downloads to obtain the required update files immediately -- on demand.

Component Category	
☐	Pattern files/Cleanup templates
☐	Antispam rules
☐	Engines
☐	OfficeScan Plug-in Programs
☐	Product programs and widget pool

Download settings

Source:

☒ Internet: Trend Micro update server

☐ Other update source

for example, http://DownloadServer.Antivirus.com/AU or
C:\ActiveUpdate\ or \updatesource

Retry frequency: ☐ If the download is unsuccessful, retry time(s), every minute(s)

Proxy: [\(Edit\)](#)

Automatic deployment settings

Configure and select a [Deployment Plan](#) below to schedule automatic deployment by location.

The OfficeScan Plug-in Manager and Control Manager widget pool do not support automatic deployment.

☐ Do not deploy(Package downloaded to default path : C:\Program Files\Trend Micro\Control Manager\WebUI\Download\ActiveUpdate)

☐ Deploy to all products immediately

☒ Based on deployment plan:

☒ When new updates found

2. From the **Component Category** area select the components to download.
 - a. Click the + icon to expand the component list for each component group.
 - b. Select the components to download. To select all components for a group, select:
 - **Pattern files/Cleanup templates**

- **Antispam rules**
 - **Engines**
 - **OfficeScan Plug-in Programs**
 - **Product programs and widget pool**
-

Step 4: Configure the Download Settings

Procedure

1. Select the update source:
 - **Internet: Trend Micro update server:** Download components from the official Trend Micro ActiveUpdate server.
 - **Other update source:** Type the URL of the update source in the accompanying field.

After selecting **Other update source**, you can specify multiple update sources. Click the + icon to add an update source. You can configure up to five update sources.

2. Select **Retry frequency** and specify the number of retries and duration between retries for downloading components.



Tip

Click **Save** before clicking **Edit** or **Deployment Plan** on this screen. If you do not click **Save** your settings will be lost.

3. If you use an HTTP proxy server on the network (that is, if the Control Manager server does not have direct Internet access), click **Edit** to configure the proxy settings on the **Connection Settings** screen.
-

Step 5: Configure the Automatic Deployment Settings

Procedure

1. Select when to deploy downloaded components from the **Automatic deployment settings** area. The options are:
 - **Do not deploy:** Components download to Control Manager, but do not deploy to managed products. Use this option under the following conditions:
 - Deploying to the managed products individually
 - Testing the updated components before deployment
 - **Deploy to all products immediately:** Components download to Control Manager, and then deploy to managed products
 - **Based on deployment plan:** Components download to Control Manager, but deploy to managed products based on the schedule you select
 - **When new updates found:** Components download to Control Manager when new components are available from the update source, but deploy to managed products based on the schedule you select



Tip

Click **Save** before clicking **Edit** or **Deployment Plan** on this screen. If you do not click **Save** your settings will be lost.

Step 6: Complete the Manual Download

Procedure

1. Click **Download Now** and then click **OK** to confirm.

The download response screen appears. The progress bar displays the download status.

2. Click **Command Details** to view details from the **Command Details** screen.

3. Click **OK** to return to the **Manual Download** screen.
-

Understanding Scheduled Download Exceptions

Download exceptions allow administrators to prevent Control Manager from downloading Trend Micro update components for entire day(s) or for a certain time every day.

This feature is particularly useful for administrators who prefer not to allow Control Manager to download components on a non-work day or during non-work hours.



Note

Daily scheduled exceptions apply to the selected days, while hourly scheduled exceptions apply to every day of the week.

Example:

The administrator decides that they do not want Control Manager to download components on weekends or after working hours throughout the week. The administrator enables **Daily Schedule Exception** and selects **Saturday** and **Sunday**. The administrator then enables **Hourly Schedule Exception** and specifies the hours of **00:00 to 9:00** and **18:00 to 24:00**.

Configuring Scheduled Download Exceptions

Procedure

1. Navigate to **Updates > Scheduled Download Exceptions**.

The **Scheduled Download Exceptions** screen appears.

Scheduled Download Exceptions [Help](#)

Choose the day(s) or hour(s) to prevent Control Manager from downloading scheduled updates.

Note: Hourly Schedule Exceptions apply to every day of the week, regardless of Daily Schedule Exception settings.

Daily Schedule Exception

☐ Do not download updates on the specified day(s):

☐ Monday ☐ Tuesday ☐ Wednesday ☐ Thursday ☐ Friday ☐ Saturday ☐ Sunday

Hourly Schedule Exception

☐ Do not download updates on the specified hour(s):

Time slot: 00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

Legend: ☒ Deny ☐ Allow

[Select All](#) [Clear All](#)

[Save](#) [Cancel](#)

2. Do one or more of the following:
 - To schedule a daily exception, under **Daily Schedule Exception**, select the day(s) to prevent downloads, and then select **Do not download updates on the specified day(s)**. Every week, Control Manager blocks all downloads during the selected day(s).
 - To schedule an hourly exception, under **Hourly Schedule Exception**, select the hour(s) to prevent downloads, and then select **Do not download updates on the specified hour(s)**. Every day, Control Manager blocks all downloads during the selected hours.
3. Click **Save**.

Configuring Scheduled Downloads

Configure scheduled downloading of components to keep your components up to date and your network secure. Control Manager supports granular component downloading. You can specify the component group and individual component download schedules. All schedules are autonomous of each other. Scheduling a download for a component group downloads all components in the group.

Use the **Scheduled Download** screen to obtain the following information for components currently in your Control Manager system:

- **Frequency:** Shows how often the component updates
- **Enabled:** Indicates if the schedule for the component is enabled or disabled
- **Update Source:** Displays the URL or path of the update source

Configuring scheduled component downloads requires multiple steps:

Step 1: Configure a Deployment Plan for Your Components

Procedure

1. Navigate to **Updates > Deployment Plan**.

The **Deployment Plan** screen appears.

2. Click **Add**.

The **Add New Plan** screen appears.

3. Type a deployment plan name in the **Name** field.

4. Click **Add** to provide deployment plan details.

The **Add New Schedule** screen appears.

Add New Schedule [Help](#)

Deployment Plan Schedule

Deployment time: ☒ Start at: 00 : 00 (hh:mm)

☐ Delay: 0 hours 0 minutes

Select targets*: The folders you see depend on the folder access rights you have been given.

- ☒ YUNATEST
- ☐ Cascading Folder
- ☐ Local Folder


5. Choose a deployment time schedule by selecting one the following options:
 - **Start at:** Performs the deployment at a specific time.
Use the menus to designate the time in hours and minutes.
 - **Delay:** after Control Manager downloads the update components, Control Manager delays the deployment according to the interval that you specify.
Use the menus to indicate the duration, in terms of hours and minutes.
 6. Select the Product Directory folder to which the schedule will apply. Control Manager assigns the schedule to all the products under the selected folder.
 7. Click **Save**.
The **Add New Plan** screen appears.
 8. Click **Save** to apply the new deployment plan.
-

Step 2: Configure Your Proxy Settings (If You Use a Proxy Server)

Procedure

1. Navigate to **Administration > Settings > Proxy Settings**.

The **Connection Settings** screen appears.

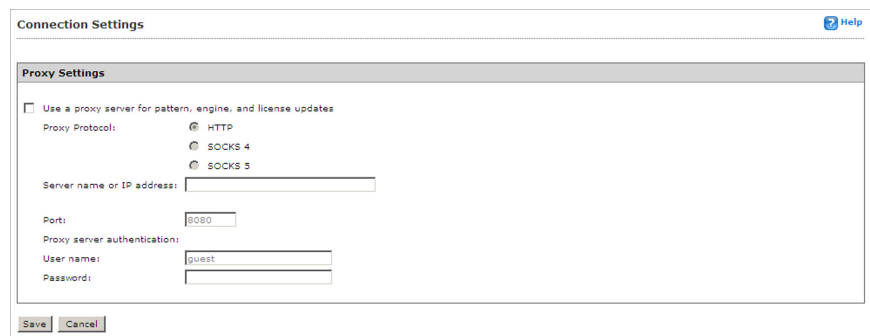

The screenshot shows a window titled "Connection Settings" with a "Help" icon in the top right. Inside, there is a section titled "Proxy Settings". At the top of this section is a checkbox labeled "Use a proxy server for pattern, engine, and license updates". Below this, there is a "Proxy Protocol:" label followed by three radio button options: "HTTP", "SOCKS 4", and "SOCKS 5". Below the radio buttons is a text field labeled "Server name or IP address:". Further down is a "Port:" label followed by a text field containing the value "8080". Below that is a "Proxy server authentication:" label, followed by two text fields: "User name:" containing the value "guest" and "Password:" which is empty. At the bottom of the dialog are "Save" and "Cancel" buttons.

2. Select **Use a proxy server for pattern, engine, and license updates**.
 3. Select the protocol:
 - **HTTP**
 - **SOCKS 4**
 - **SOCKS 5**
 4. Type the host name or IP address of the server in the **Server name or IP** address field.
 5. Type a port number for the proxy server in the **Port** field.
 6. Type a logon name and password if your server requires authentication.
 7. Click **Save**.
-

Step 3: Select the Components to Update

Procedure

1. Navigate to **Updates > Scheduled Download**.

The **Scheduled Download** screen appears.

Component Category	Frequency	Enable
+ Pattern files/Cleanup templates		Enable All Disable All
+ Antispam rules		Enable All Disable All
+ Engines		Enable All Disable All
+ OfficeScan Plug-in Programs		Enable All Disable All
+ Product programs and widget pool		Enable All Disable All

Save Cancel

2. From the **Component Category** area select the components to download.
 - a. Click the **+** icon to expand the component list for each component group.
 - b. Select the components to download. To select all components for a group, select:
 - **All Pattern files/Cleanup templates**
 - **All Antispam rules**
 - **All Engines**
 - **OfficeScan Plug-in Programs**
 - **Product programs and widget pool**

The **Component Name>** screen appears. Where Component Name> represents the name of the selected component.

<Pattern files/Cleanup templates--All Pattern files/Cleanup templates>
[Help](#)

Schedule automatic component download below.

☒ Enable scheduled download

Schedule and frequency

Download:
☐ Every 30 minutes
☐ Every hour
☒ Every day
☐ Every week on Sunday

Start time:
00 : 36 (hh:mm)

Download settings

Source:
☒ Internet: Trend Micro update server
☐ Other update source

for example, http://DownloadServer.Antivirus.com/AU or

C:\ActiveUpdate\ or \updatesource

Retry frequency:
☐ If the download is unsuccessful, retry 2 time(s), every 2 minute(s)

Proxy:
[\(Edit\)](#)

Automatic deployment settings

Configure and select a [Deployment Plan](#) below to schedule automatic deployment by location.

☐ Do not deploy
☐ Deploy to all products immediately
☒ Based on deployment plan: Deploy to All Managed Products flow (Default)

☒ When new updates found

Save Cancel Reset

Step 4: Configure the Download Schedule

Procedure

1. Select the **Enable scheduled download** check box to enable scheduled download for the component.
2. Define the download schedule. Select a frequency, and use the appropriate drop down menu to specify the desired schedule. You may schedule a download by minutes, hours, days, or weeks.
3. Use the **Start time** menus to specify the date and time the schedule starts to take effect.

Step 5: Configure the Download Settings

Procedure

1. Select the update source:
 - **Internet: Trend Micro update server:** Download components from the official Trend Micro ActiveUpdate server.
 - **Other update source:** Type the URL of the update source in the accompanying field.

After selecting **Other update source**, you can specify multiple update sources. Click the **+** icon to add an update source. You can configure up to five update sources.
2. Select **Retry frequency** and specify the number of retries and duration between retries for downloading components.



Note

Click **Save** before clicking **Edit** or **Deployment Plan** on this screen. If you do not click **Save** your settings will be lost.

3. If you use an HTTP proxy server on the network (that is, if the Control Manager server does not have direct Internet access), click **Edit** to configure the proxy settings on the **Connection Settings** screen.
-

Step 6: Configure the Automatic Deployment Settings

Procedure

1. Select when to deploy downloaded components from the **Automatic deployment settings** area. The options are:
 - **Do not deploy:** Components download to Control Manager, but do not deploy to managed products. Use this option under the following conditions:
 - Deploying to the managed products individually

- Testing the updated components before deployment
- **Deploy immediately:** Components download to Control Manager, then deploy to managed products
- **Based on deployment plan:** Components download to Control Manager, but deploy to managed products based on the schedule you select
- **When new updates found:** Components download to Control Manager, and deploy to managed products when new components are available from the update source

**Note**

Click **Save** before clicking **Edit** or **Deployment Plan** on this screen. If you do not click **Save** your settings will be lost.

2. Select a deployment plan after components download to Control Manager, from the **Deployment Plan** screen.
 3. Click **Save**.
-

Step 7: Enable the Schedule and Save Settings

Procedure

1. Click the status button in the **Enable** column.
 2. Click **Save**.
-

Configuring Scheduled Download Schedule and Frequency

Specify how often Control Manager obtains component updates at the Schedule and Frequency group.

Procedure

1. Navigate to **Updates > Scheduled Download**.

The **Scheduled Download** screen appears.

2. From the **Component Category** area select the components to download.
 - a. Click the **+** icon to expand the component list for each component group.
 - b. Select the components to download. To select all components for a group, select:
 - **All Pattern files/Cleanup templates**
 - **All Antispam rules**
 - **All Engines**
 - **OfficeScan Plug-in Programs**
 - **Product programs and widget pool**

The **Component Name>** screen appears. Where Component Name> represents the name of the selected component.

3. Under Schedule and frequency:
 - a. Define the download schedule. Select a frequency, and use the appropriate drop down menu to specify the desired schedule. You may schedule a download every minutes, hours, days, or weeks.
 - b. Use the **Start time** drop-down menus to specify the date and time the schedule starts to take effect.
 4. Click **Save**.
-

Configuring Scheduled Download Settings

The **Download Settings** group defines the components Control Manager automatically downloads and the download method.

Procedure

1. Navigate to **Updates > Scheduled Download**.

The **Scheduled Download** screen appears.

2. From the **Component Category** area select the components to download.
 - a. Click the **+** icon to expand the component list for each component group.
 - b. Select the components to download. To select all components for a group, select:

- **All Pattern files/Cleanup templates**
- **All Antispam rules**
- **All Engines**
- **OfficeScan Plug-in Programs**
- **Product programs and widget pool**

The **Component Name>** screen appears. Where Component Name> represents the name of the selected component.

3. Under **Download settings**, select one of the following update sources:
 - **Internet: Trend Micro update server:** (default setting) Control Manager downloads the latest components from the Trend Micro ActiveUpdate server
 - **Other update source:** specify the URL of the latest component source, for example, your company's Intranet server

After selecting **Other update source**, you can specify multiple update sources. Click the **±** icon to add an additional update source. You can configure up to five update sources.

4. Select **Retry frequency** to instruct Control Manager to retry downloading latest components. Specify the number of attempts and the frequency of each set of attempts in the appropriate fields.

**Note**

Click **Save** before clicking **Edit** or **Deployment Plan** on this screen. If you do not click **Save** your settings will be lost.

5. If you are using a proxy server on the network (that is, the Control Manager server does not have direct Internet access), click **Edit** to configure the proxy settings from the **Connection Settings** screen.
 6. Click **Save**.
-

Configuring Scheduled Download Automatic Deployment Settings

Use the Automatic deployment settings group to set how Control Manager deploys updates.

Procedure

1. Navigate to **Updates > Scheduled Download**.

The **Scheduled Download** screen appears.

2. From the **Component Category** area select the components to download.
 - a. Click the **+** icon to expand the component list for each component group.
 - b. Select the components to download. To select all components for a group, select:
 - **All Pattern files/Cleanup templates**
 - **All Antispam rules**
 - **All Engines**
 - **OfficeScan Plug-in Programs**
 - **Product programs and widget pool**

The **Component Name>** screen appears. Where Component Name> represents the name of the selected component.

3. Select a deployment plan after components download to Control Manager, from the **Deployment Plan** screen.
4. Click **Save**.



Note

The settings in **Automatic deployment settings** only apply to components used by managed products.

Understanding Deployment Plans

A deployment plan allows you to set the order in which Control Manager updates your groups of managed products. With Control Manager, you can implement multiple deployment plans to different managed products at different schedules. For example, during an outbreak involving an email-borne virus, you can prioritize the update of your email message scanning software components such as the latest virus pattern file for Trend Micro ScanMail for Microsoft Exchange.

The Control Manager installation creates two deployment plans:

- Deploy to All Managed Products Now (Default): default plan used during component updates
- Deploy to All Immediately (Outbreak-Prevention): default plan for the Outbreak Prevention Services Prevention Stage

By default, these plans deploy updates to all products in the Product Directory immediately.

Select or create plans from the Manual and Scheduled download screens. Customize these plans, or create new ones, as required by your network. For example, create deployment plans according to the nature of the outbreak:

- Email-borne virus

- File-sharing virus

Deploying updates to the Product Directory is separate from the download process.

Control Manager downloads the components and follows the deployment plan according to manual or scheduled download settings.

When creating or implementing a deployment plan, consider the following points:

- Assign deployment schedules to folders, not to specific products.

Planning the contents of the Product Directory folders, therefore, becomes very important.

- You can only include one folder for each deployment plan schedule.

However, you can specify more than one schedule per deployment plan.

- Control Manager bases the deployment plan delays on the completion time of the download, and these delays are independent of each other.

For example, if you have three folders to update at 5 minute intervals, you can assign the first folder a delay of 5 minutes, and then set delays of 10 and 15 minutes for the two remaining folders.


Creating Deployment Plans

Create a new plan if none of the existing plans suits your needs.

Procedure

1. Navigate to **Updates > Deployment Plan**.

The **Deployment Plan** screen appears.

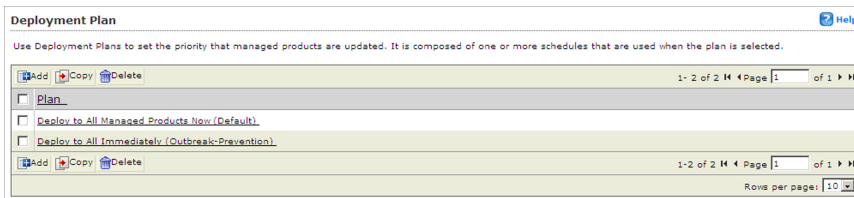

2. Click **Add**.

The **Add New Plan** screen appears.

3. Type a deployment plan name in the **Name** field.
4. Click **Add** to provide deployment plan details.

The **Add New Schedule** screen appears.

5. Choose a deployment time schedule by selecting one the following options:
 - **Start at:** Performs the deployment at a specific time.
Use the menus to designate the time in hours and minutes.
 - **Delay:** after Control Manager downloads the update components, Control Manager delays the deployment according to the interval that you specify.
Use the menus to indicate the duration, in terms of hours and minutes.

6. Select the Product Directory folder to which the schedule will apply. Control Manager assigns the schedule to all the products under the selected folder.

7. Click **Save**.

The **Add New Plan** screen appears.

8. Click **Save** to apply the new deployment plan.
-

Modifying a Deployment Plan

Use the **Edit Plan** screen to add, modify, or remove schedules from a deployment plan.

Procedure

1. Navigate to **Updates > Deployment Plan**.

The **Deployment Plan** screen appears.

2. Click the name of the plan to modify.

The **Edit Plan** screen appears.

3. Click the name of the schedule to modify.

The **Edit Schedule** screen appears.

4. Modify the deployment time or Product Directory folder.



Note

You cannot remove a schedule if there are no other schedules available.

5. Click **Save**.

The **Edit New Plan** screen appears.

6. After completing all the necessary modifications, click **Save**.

The **Deployment Plan** screen appears.

Duplicating a Deployment Plan

Create new deployment plans based on an existing plan.

Procedure

1. Navigate to **Updates > Deployment Plan**.

The **Deployment Plan** screen appears.

2. Select the accompanying check box for the plan to copy.
3. Click **Copy**.

The **Add New Plan** screen appears.

4. Type a unique name for the plan. **New Plan** is the default name of copied plans.
5. Modify the deployment plan as required.



Note

You cannot remove a schedule if there are no other schedules available.

6. Click **Save**.
-

Removing a Deployment Plan

You can delete obsolete or outdated plans.

Procedure

1. Navigate to **Updates > Deployment Plan**. The Deployment Plan screen appears.
2. Select the accompanying check box for the plan to delete.
3. Click **Delete**.

The selected plans delete from the Deployment Plan list.


Configuring the Proxy Settings for Component Updates

Configure the proxy server connection for component downloads and license updates.

Procedure

1. Navigate to **Administration > Settings > Proxy Settings**.

The **Connection Settings** screen appears.

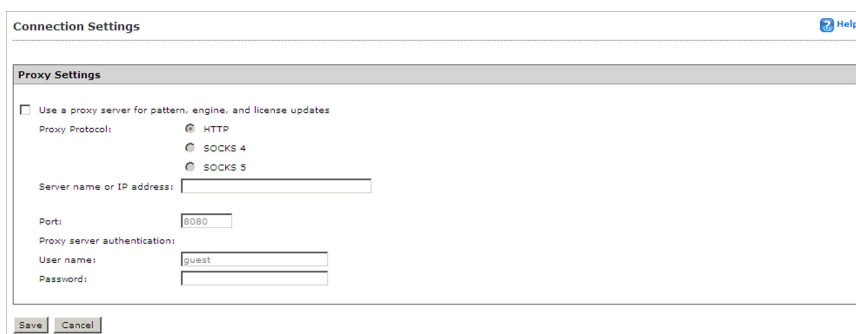

The screenshot shows the 'Connection Settings' dialog box. The 'Proxy Settings' section is active, displaying a checkbox for 'Use a proxy server for pattern, engine, and license updates'. Below this, there are radio buttons for 'Proxy Protocol' with options 'HTTP', 'SOCKS 4', and 'SOCKS 5'. There are also input fields for 'Server name or IP address', 'Port' (with '8080' entered), 'Proxy server authentication' (with 'User name' as 'guest' and 'Password' as an empty field). At the bottom are 'Save' and 'Cancel' buttons.

2. Select **Use a proxy server for pattern, engine, and license updates**.
3. Select the protocol:
 - **HTTP**
 - **SOCKS 4**
 - **SOCKS 5**
4. Type the host name or IP address of the server in the **Server name or IP address** field.
5. Type a port number in the **Port** field.
6. Type a log on name and password if your server requires authentication.

7. Click **Save**.
-

Configuring Update/Deployment Settings

Using HTTPS to download components from the Trend Micro ActiveUpdate server (the default download source) or other update source provides a more secure method for retrieving components.

Downloading components from a shared folder in a network requires setting the local Windows and Remote UNC authentications.

The local Windows authentication refers to the Active Directory user account in the Control Manager server. The account should have:

- Administrator privilege
- **Log on as a batch job policy** set

The **remote UNC authentication** feature uses a user account from the component source server that has permission to share a folder to which Control Manager will download updates.

Enabling HTTPS Download

Procedure

1. Navigate to **Updates > Update/Deployment Settings**.

The **Update/Deployment Settings** screen appears.

Update / Deployment Settings [Help](#)

Control Manager can use a variety of access and communication methods. Provide the required data to take advantage of these options.

ActiveUpdate Settings

☐ Enable HTTPS for the default update download source

Remote UNC Settings

Local Windows Authentication:

User name:

Password:

Remote UNC Authentication:

User name:

Password:

2. Select **Enable HTTPS for the default update download source**.
 3. Click **Save**.
 4. Navigate to the **Manual Download** or **Scheduled Download** screen.
 5. On the working area under **Download settings**, select **Internet: Trend Micro update server** or specify your organization's component source server in the **Other update source** field.
 6. Click **Save**.
-

Enabling UNC Download

Procedure

1. Navigate to **Updates > Update/Deployment Settings**.

The **Update/Deployment Settings** screen appears.

2. Type the **Local Windows Authentication** and **Remote UNC Authentication** user names and passwords.
3. Click **Save**.
4. Navigate to the **Manual Download** or **Scheduled Download** screen.

5. On the working area under **Download settings**, select **Other update source** and then specify the shared network folder.
 6. Click **Save**.
-

Setting "Log on as batch job" Policy

The local Windows authentication refers to the Active Directory user account in the Control Manager server. The account should have:

- Administrator privilege
 - **Log on as a batch job** policy set
-

Procedure

1. Click **Start > Settings > Control Panel**.
2. Click **Administrative Tools**.
3. Open **Local Security Policy**.

The **Local Security Settings** screen appears.


4. Click **Local Policies > User Rights Assignment**.
5. Double-click **Log on as a batch job**.

The **Log on as a batch job Properties** dialog box appears.

6. Add the user if they do not appear on the list.
-

Part II

Monitoring the Control Manager Network

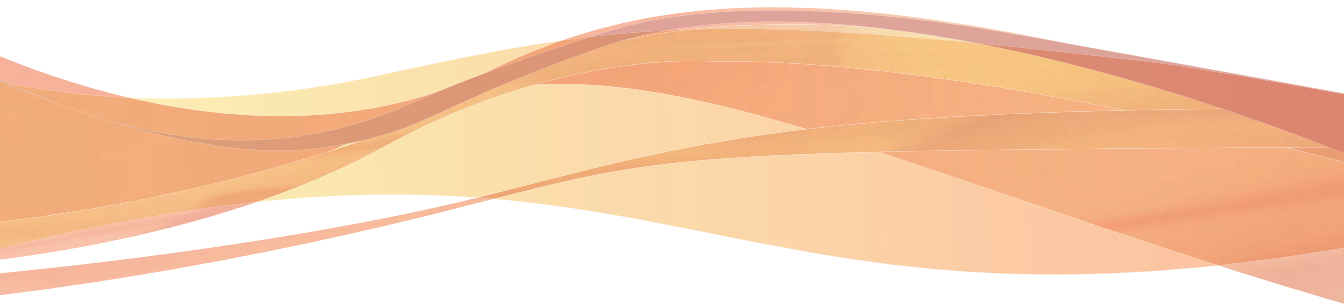

Chapter 8

Working with the Dashboard and Widgets

The **Dashboard** replaces the Summary screen from previous versions of Control Manager.

This chapter contains the following topics:

- *Using the Dashboard on page 8-2*
- *Understanding Tabs on page 8-2*
- *Understanding Widgets on page 8-9*

Using the Dashboard

The Control Manager dashboard provides at-a-glance information for the Control Manager network. The dashboard is comprised of two components:

- **Tabs:** Allow administrators to create a screen that contains one or more widgets

Click **Play Tab Slide Show** to automatically switch between tab views.

Click **Pause Tab Slide Show** to pause at a tab view.
- **Widgets:** Provide specific information about various security-related events



Note

Enabling Smart Feedback is required for some widgets to function. See [Configuring Smart Protection Network Settings on page 8-27](#) for more information on enabling Smart Feedback.

User Accounts and the Dashboard

Each user account displays its own dashboard. When a user logs on to Control Manager for the first time, the default tabs and the widgets contained within the tabs appear on the dashboard.

Each user account can customize the dashboard, tabs, and widgets for the account's specific needs. Customizing the dashboard, tabs, or widgets for one user account has no effect on the dashboard, tabs, or widgets for a different user account. Each user account has a completely independent dashboard, tabs, and widgets from every other user account.

Understanding Tabs

The Control Manager dashboard uses tabs to provide flexibility for administrators. Tabs provide a container for widgets allowing administrators to create their own customized dashboard. The dashboard supports up to 30 tabs per user account.

You can move widgets on tabs by dragging and dropping widgets in various locations on the tab. The layout for a tab determines where you can move the widget.

**Note**

Customizing the dashboard, tabs, or widgets for one user account has no effect on the dashboard, tabs, or widgets for a different user account. Each user account has a completely independent dashboard, tabs, and widgets from every other user account.

Default Tabs

The dashboard provides the following tabs:

- **Summary**
- **DLP Incident Investigation**
- **Data Loss Prevention**
- **Compliance**
- **Threat Detection**
- **Smart Protection Network**

**Note**

Deleting the default tabs permanently removes the tabs from viewing for the user account that removed the tabs. There is no way to recover a deleted tab. Deleting a default tab has no impact on the dashboard for other user accounts.

Summary Tab

The **Summary** tab replaces the Control Manager **Home** screen. All information that was available on the Control Manager **Home** screen is available through the widgets on the **Summary** tab.

TABLE 8-1. Summary Tab Widgets

WIDGET	DESCRIPTION
Quick Launch	Displays shortcuts to main features.

WIDGET	DESCRIPTION
Policy Status	Displays the deployment status of your policies.
C&C Callback Events	Displays the number of callback attempts based on compromised hosts or callback addresses.
Endpoint Connection Status	Displays the endpoint connection status (online, offline, roaming), that is related to the management server.
Product Connection Status	Displays the managed product's connection status to Control Manager (active,inactive, abnormal).

DLP Incident Investigation Tab

The **DLP Incident Investigation** tab contains widgets that display information about DLP incidents based on incident status, severity levels, and managed users.

TABLE 8-2. DLP Incident Investigation Tab Widgets

WIDGET	DESCRIPTION
DLP Incidents by Severity and Status	Displays the number of DLP incidents based on severity levels and incident status.
DLP Incident Trends by User	Displays incident trends based on managed users.
DLP Incidents by User	Displays the number of incidents based on managed users and severity levels.

Data Loss Prevention Tab

The **Data Loss Prevention** tab contains widgets that display information about DLP incidents, template matches, and incident sources.

TABLE 8-3. Data Loss Prevention Tab Widgets

WIDGET	DESCRIPTION
DLP Incidents by Channel	Displays the number of DLP incidents based on channels.
DLP Template Matches	Displays the number of times that the criteria in a template is matched. Each DLP incident may have one or more template matches.
Top DLP Incident Sources	Displays the top sources of DLP incidents including users, email addresses, host names, and IP addresses.
DLP Violated Policy	Displays the number of DLP policy violation incidents.

Compliance Tab

The **Compliance** tab contains widgets that display information relating to component or connection compliance for managed products or endpoints.

TABLE 8-4. Compliance Tab Widgets

WIDGET	DESCRIPTION
Product Application Compliance	Displays the product version, build, and update status for managed products. This widget provides administrators with a quick way to discern which managed product's applications are up to date and which require updating.
Product Component Status	Displays the component's (pattern, template, engine, rule) version and status (up-to-date or out-of-date) for managed products or endpoints. This widget provides administrators with a quick way to discern which products or endpoints are up to date.
Product Connection Status	Displays the managed product's connection status to Control Manager (active, inactive, abnormal).
Endpoint Connection Status	Displays the endpoint connection status (online, offline, roaming), that is related to the management server.

Threat Detection Tab

The **Threat Detection** tab contains widgets that display aggregated detections of security threats.



Note

On parent Control Manager servers, the **Control Manager Top Threats** and **File Reputation Top Threat Detections** widgets require scheduled log uploads from child Control Manager servers, to display accurate data.

To enable scheduled log uploads from child Control Manager servers, configure on the parent Control Manager server: **Directories > Products > Select a child server from the Product Directory > Configure > Schedule Child Control Manager server log uploads**

TABLE 8-5. Threat Detection Tab Widgets

WIDGET	DESCRIPTION
Control Manager Top Threats	This widget displays the top 10/25/50 detected: - Malicious files - Malicious URLs
Control Manager Threat Statistics	Displays the number of threat detections and the ratio of threats compared to the total number of detections. This widget displays this data by: - Product category - Threat type
Threat Detection Results	Displays the number of threat detections globally, within an industry, and locally on your network. This widget displays this data by: - Product category - Threat type
Policy Violation Detections	Displays the number of policy violation detections for Network VirusWall Enforcer devices.

WIDGET	DESCRIPTION
C&C Callback Events	Displays the number of callback attempts based on compromised hosts or callback addresses.

Smart Protection Network Tab

The **Smart Protection Network** tab contains widgets that contain information exclusively from the Trend Micro Smart Protection Network (which includes Email Reputation, File Reputation, and Web Reputation) and information that is combined with information from the Control Manager network.

TABLE 8-6. Smart Protection Network Tab Widgets

WIDGET	DESCRIPTION
File Reputation Top Threat Detections	Displays the top 10 threat detections made by File Reputation. The data is a comparison between global detections on the threat and detections made on your network.
Smart Protection Network Connections	Displays the number of endpoints on your network that connect to the Trend Micro Smart Protection Network for updates or security threat verifications.
Smart Protection Network Threat Statistics	Displays the number of threat detections globally, within an industry, and locally on your network. This widget displays this data by: - Product category - Threat type
File Reputation Threat Map	Displays the total number of security threat detections made by File Reputation. The information is displayed on a world map by geographic location.

Adding Tabs

Add tabs to the dashboard to provide a customized information matrix for your Control Manager network needs.

Procedure

1. Navigate to the **Dashboard** screen.
2. Click the **+** button.

The **New Tab** screen appears.

3. Type a meaningful title for the tab in the **Title** field.
4. Select a layout for the tab.

**Note**

The number of widgets that you can add to a tab depends on the layout for the tab. Once the tab contains the maximum number of widgets, you must remove a widget from the tab or create a new tab for the widget.

5. Click **Save**.
The empty tab appears on the dashboard.
 6. Click **Add Widgets** to populate the tab with widgets.
-

Configuring Tab Settings

You can change the default name of a tab using the **Tab Settings** screen.

Procedure

1. Navigate to the **Dashboard** screen.
2. Click **Tab Settings**.
The **Tab Settings** screen appears.
3. Type a meaningful title for the tab in the **Title** field.
4. Select a tab layout.
5. Configure slide show and auto-fit settings.

6. Click **Save**.

Understanding Widgets

Widgets are the core components for the dashboard. Tabs provide the layout and widgets provide the actual data for the dashboard.



Note

Customizing the dashboard, tabs, or widgets for one user account has no effect on the dashboard, tabs, or widgets for a different user account. Each user account has a completely independent dashboard, tabs, and widgets from every other user account.

Download the Control Manager widget pool (under **Product programs and widget pool** on the **Manual Download** and **Scheduled Download** screens) periodically to check for new or updated widgets.

The data a widget displays comes from one of the following places:

- Control Manager database
- Trend Micro Smart Protection Network
- Managed products added to the Dashboard **Server Visibility** list



Note

Smart Feedback must be enabled to display data for widgets that include data from Smart Protection Network.

The data a widget displays is controlled in two ways:

TABLE 8-7. Widget Data

ITEM	DETAILS
User account	A user's account grants or restricts access to any managed product registered to Control Manager.

ITEM	DETAILS
Scope	The data scope on many widgets can be individually configured. This means a user can further specify the data source location for the widget. Example: An OfficeScan administrator, who manages multiple OfficeScan servers, could create one tab and add widgets that display data for only one OfficeScan server.

Each widget provides targeted security-related information. Widgets can display this information in one of the following ways:

- Bar chart
- Pie chart
- Line chart
- Table

Widget Settings

Some widgets require configuring very specific settings before the widgets can be used. For example, the **Endpoint Protection Verification** widget requires connection to your Active Directory server, OfficeScan servers, and Deep Security servers.

Configuring Active Directory and Endpoint Protection Verification Widget Settings

The Endpoint Protection Verification widget requires connection to your Active Directory server, OfficeScan servers, and Deep Security servers to work properly.



WARNING!

The OfficeScan server client trees and Active Directory trees must be synchronized for the **Endpoint Protection Verification Widget** to work properly.

Procedure

1. Navigate to **Administration > Settings > Active Directory and Widget Settings**.

The **Active Directory and Endpoint Protection Verification Widget Settings** screen appears.

2. Select **Enable specified connections**.
3. Configure the **Active Directory Server Connection Settings**:
 - **Server FQDN or IP address**: The FQDN or IP address for your Active Directory server
 - **Domain\user name**: The domain name and user name required to log on to your Active Directory server
 - **Password**: The password required to log on to your Active Directory server



Important

Depending on various factors such as the size of your organization, the initial Active Directory synchronization might take more than an hour.

4. Configure the **OfficeScan Server Connection Settings**:
 - **Product ID**: A short identifier for the OfficeScan server used by the widget
 - **Server FQDN or IP address**: The FQDN or IP address for your OfficeScan server
 - **Port**: The port number used for communication with your OfficeScan server
 - **User name**: The domain name and user name required to log on to your OfficeScan server
 - **Password**: The password required to log on to your OfficeScan server
5. Configure the **Deep Security Server Connection Settings**:
 - **Product ID**: A short identifier for the Deep Security server used by the widget

- **Server FQDN or IP address:** The FQDN or IP address for your Deep Security server
 - **Port:** The port number used for communication with your Deep Security server
 - **User name:** The domain name and user name required to log on to your Deep Security server
 - **Password:** The password required to log on to your Deep Security server
6. To add more than one OfficeScan or Deep Security server click the **+** icon. You can add upto five OfficeScan servers and upto five Deep Security servers.
 7. Configure **Synchronization Settings**:
 - Specify how often all of the servers configured on this screen will synchronize with the **Endpoint Protection Verification** widget.
 - Select the **Synchronize after clicking "Save"** check box to force all of the servers configured on this screen to synchronize with the **Endpoint Protection Verification** widget, after clicking save.
 8. Click **Save**.
-

Endpoint Encryption Connection Settings

Widgets that get information from the Endpoint Encryption server must first connect to the server.

Procedure

1. Navigate to the **Dashboard** screen.
2. Click **Server Visibility**.
3. Click **Add**.
4. Configure the connection settings:
 - **Server Name:** The FQDN or IP address and the port number for your server

- **Server Type:** Select **Endpoint Encryption** from the list
 - **Account:** The user name required to log on to the server
 - **Password:** The password required to log on to the server
 - **Enterprise:** The enterprise for the associated endpoints.
5. Click **Save**.
 6. Click () next to **Proxy Settings** and configure the settings, if you network uses a proxy server.
 7. Click **Apply**.
 8. To add more than one product server click **Add**.

Using Widgets

Use widgets by performing the following tasks:

TABLE 8-8. Widget Tasks

TASK	STEPS
Move a widget	Use drag-and-drop to move widgets to different locations within the tab.
Resize a widget	Resize widgets on a multi-column tab by pointing the cursor to the right edge of the widget and then moving the cursor to the left or right.
Refresh widget data	Click the refresh icon ().
Closing a widget	Click  , and then select X Close Widget .

TASK	STEPS
Understand widget	Click the help icon on a widget to view the following types of information: • Overview: Description for the widget and how the widget can be used • Widget Data: Detailed information about the data that displays in the widget's table • Configure: Description of settings that are readily visible on the widget • Edit: Description of settings that require clicking the edit icon to modify

Detailed Widget Information

Displaying widget data in a table provides an added benefit to users. The data in some columns can be clicked to view detailed information.

Example: From the **Control Manager Top Threats** widget on the **Threat Statistics** tab, clicking any link from the **Detections** column opens to a table with the following information:

TABLE 8-9. Widget Drill-down Example

DATA	DESCRIPTION
Endpoint	Host name for the endpoint with a virus
Product Entity	Name of the product that detected the virus
Virus	Name of the virus
Start time	Time of first detection of the virus
End time	Time of the last detection of the virus
Detections	Number of virus detections

Widget List

The following table lists widgets available for the dashboard.



Note

On parent Control Manager servers, the **Control Manager Top Threats** and **File Reputation Top Threat Detections** widgets require scheduled log uploads from child Control Manager servers, to display accurate data.

To enable scheduled log uploads from child Control Manager servers: **Products > Select a child server from the Product Directory > Configure > Schedule Child Control Manager server log uploads**

TABLE 8-10. Widget List

WIDGET	PURPOSE
Active Users for File Reputation	Use this widget to track the number of users that send file reputation queries to Smart Protection Servers.
Active Users for Web Reputation	Use this widget to track the number of users that send web reputation queries to Smart Protection Servers.
C&C Callback Events	Use this widget to check the number of callback attempts. View data by compromised host or callback address.
Unique Compromised Hosts Over Time	Use this widget to check the unique compromised hosts logged by managed products within the last 30 days.
Deep Security Anti-Malware Event History	Use this widget to display the number of Anti-Malware Events that occurred over the specified time range.
Deep Security Anti-Malware Status (Malware)	Use this widget to display the five most common malware threats detected on your computers.
DLP Incidents by Severity and Status	Use this widget to check the number of incidents triggered by managed users. Filter data by incident severity level.
DLP Incident Trends by User	Use this widget to check incident trends of managed users. Filter data by incident severity level.

WIDGET	PURPOSE
DLP Template Matches	Use this widget to check the type of DLP incidents triggered on your network. Data can be filtered by templates.
DLP Incidents by Policy	Use this widget to check the total number of DLP incidents. By default data is sorted by the number of incidents. To sort data by policy name, click the Policy column title. Example: You want to know the total number of DLP incidents based on policies.
Top DLP Incident Sources	Use this widget to check the DLP incident sources on your network. Data can be filtered by the source where the incident is triggered. Example 1: You want to know the top DLP incidents by sender across your network. Example 2: You want to know the top DLP incidents by IP address across your network.
DLP Incidents by User	Use this widget to check the number of incidents triggered by managed users. Filter data by incident severity level.
DLP Incidents by Channel	Use this widget to check the total number of DLP incidents on your network. Data can be filtered by channel where the incident is triggered. Example 1: You want to know the total number of DLP incidents across your network. Example 2: You want to know the total number of DLP incidents by email and webmail on your network.
Hosts with C&C Callback Attempts	Use this widget to track endpoints with confirmed connection to C&C servers.
HTTP Traffic Report for File Reputation	Use this widget to track the HTTP traffic that has been sent to Smart Protection Server.
HTTP Traffic Report for Web Reputation	Use this widget to track the HTTP traffic that has been sent to Smart Protection Server.

WIDGET	PURPOSE
Policy Status	Use this widget to check the deployment status of your policies.
Quick Launch	Use this widget to access feature shortcuts.
Real Time Status	User the real time status widget to monitor Smart Protection Server status.
Control Manager Threat Statistics	Use this widget to check the total number of security threat detections on your network. Data can be filtered by security threat type or by the location on your network where the threat is detected. The data in this widget contains both computer and mobile device detections. Example 1: You want to know the total number of virus detections across your network. Example 2: You want to know the total number of security threat detections from file servers on your network.  Note Desktop type includes mobile devices.
Top 10 Infected Computers for File Reputation	Use this widget to track the top computers with infections on your network. Example: You want to know the computers with the most infections on your network.
Top 10 Blocked Computers for Web Reputation	Use this widget to track the top computers with blocked URLs on your network.
Deep Security Component Summary	Use this widget to track the version numbers of the currently available Deep Security component updates and what percentage of computers have been updated to these latest version.
Deep Security Feature Summary	Use this widget to track the recent activity of each of the Deep Security modules.

WIDGET	PURPOSE
Deep Security Status Summary	Use this widget to track the number of critical and warning alerts and the state of computers across your network.
Endpoint Protection Verification	Use this widget to verify your endpoints are protected by OfficeScan or Deep Security.
Smart Protection Network Connection	Use this widget to track the number of endpoints which connect to the Global Smart Scan Server.
Product Application Compliance	Use this widget to track which managed product's applications are not up to date. Example: You want to know which OfficeScan 10 servers are not within three build releases of the latest version of OfficeScan 10.
Endpoint Connection Status	Use this widget to track endpoints according to their status (online, offline, roaming).
Product Connection Status	Use this widget to track which managed products are active, inactive, or that have an abnormal connection to Control Manager.
Product Component Status	Use this widget to track managed products or endpoints with out of date components. Example: You want to know which endpoints with OfficeScan clients do not have the latest version of the Virus Pattern File.
Email Reputation Threat Map	Use this widget as a reference for global trends in spam.
File Reputation Threat Map	Use this widget as a reference for global trends in malicious files.
File Reputation Top Threat Detections	Use this widget as a reference between the top threats globally and the threats on your network.
Smart Protection Network Compliance Status	Use this widget as a reference for endpoints and managed products that have out-of-date components.

WIDGET	PURPOSE
Smart Protection Network Threat Statistics	Use this widget as a reference for security threat detections on your network, globally, and globally within an industry. The data in this widget contains both computer and mobile device detections.
Threat Detection Results	Use this widget to track which endpoints or managed products need further action from administrators. Example: You want to know which endpoints or managed products have viruses that could not be cleaned, deleted, or quarantined.
Control Manager Top File-based Threats	Use this widget to track distribution of the top malicious files detected on endpoints across your network.
Control Manager Top Threats	Use this widget to track the top malicious files detected or malicious URLs your endpoints access across your network. Example: You want to know the top malicious URLs detected by a specific segment of your network.
Policy Violation Detections	Use this widget to track Network VirusWall Enforcer service violations.
Web Reputation Top Threat Sources	Use this widget as a reference for global trends in malicious URLs.
Web Reputation Top Threatened Users	Use this widget as a reference for global trends in malicious URLs.
Deep Security/Vulnerability Protection Application Type Activity (Detected)	Use this widget to display the Application Types associated with detected IPS events on your computers.
Deep Security/Vulnerability Protection Application Type Activity (Prevented)	Use this widget to display the Application Types associated with IPS (Prevented) Events on your computers.
Deep Security Firewall Activity (Detected)	Use this widget to display the five Firewall Rules operating in Detection mode that have triggered the greatest number of Events.

WIDGET	PURPOSE
Deep Security Firewall Activity (Prevented)	Use this widget to display the five Firewall Rules operating in Prevention mode that have triggered the greatest number of Events.
Deep Security/Vulnerability Protection Firewall Event History	Use this widget to display the number of Firewall Events that occurred over a specified time range. The chart displays Events triggered by Firewall Rules in both Detection and Prevention mode.
Deep Security/Vulnerability Protection IPS Activity (Detected)	Use this widget to display the five IPS Rules operating Detection mode that have triggered the greatest number of Events.
Deep Security/Vulnerability Protection IPS Activity (Prevented)	Use this widget to display the five IPS Rules operating Prevention mode that have triggered the greatest number of Events.
Deep Security Integrity Monitoring Activity	Use this widget to display the five Integrity Monitoring Rules that have triggered the greatest number of Events.
Deep Security Integrity Monitoring Event History	Use this widget to display the five Integrity Monitoring Rules that have triggered the greatest number of Events.
Deep Security/Vulnerability Protection Intrusion Prevention Event History	Use this widget to display the number of IPS Events that occurred over the specified time range. The chart displays Events triggered by IPS Rules in both Detect and Prevent mode.
Deep Security Log Inspection Activity	Use this widget to display the five Log Inspection Rules that have triggered the greatest number of Events.
Deep Security Log Inspection Event History	Use this widget to display the number of Events triggered by Log Inspection Rules that occurred over the specified time range.
Deep Security Reconnaissance Scan Event History	Use this widget to display the number of Events triggered by Reconnaissance Scan detection settings that occurred over the specified time range.
Deep Security Web Reputation URL Activity	Use this widget to display the five Web Reputation Service URLs that have triggered the greatest number of Events.

WIDGET	PURPOSE
Deep Security Web Reputation Event History	Use this widget to display the number of Events triggered by Web Reputation Service URLs that occurred over the specified time range.
Deep Security/Vulnerability Protection Status Summary	Use this widget to display the number of Critical and Warning Alerts, as well as a pie chart indicating what percentage of computers are in a particular state.
Deep Security/Vulnerability Protection Feature Summary	Use this widget to display the recent activity of managed product's modules.
Deep Security Component Summary	Use this widget to display the version numbers of the currently available Deep Security component updates and what percentage of computers have been updated to these latest versions.
Top Sensitive File Policy Detections	Use this widget to display potential data loss and the policies that trigger when sensitive files have been detected.
Top Sensitive Files	Use this widget to display the top sensitive files detected on endpoints across the network.
Top Endpoints with Sensitive Files	Use this widget to display endpoints with potential data loss and the sensitive files that have been detected on those endpoints.
Top Data Discovery Template Matches	Use this widget to show the top data loss prevention template policy detections over time.
Android Device Health Status	Use this widget to display a summary of the health status of registered Android mobile devices.
BlackBerry Device Health Status	Use this widget to display a summary of the health status of registered BlackBerry mobile devices.
Symbian Device Health Status	Use this widget to display a summary of the health status of registered Symbian mobile devices.
Windows Mobile Device Health Status	Use this widget to display a summary of the health status of registered Windows Mobile devices.

WIDGET	PURPOSE
iOS Device Health Status	Use this widget to display a summary of the health status of registered iOS mobile devices.
Components Update Status	Use this widget to display a summary of the device-update status of registered mobile devices.
Policy Update Status Summary	Use this widget to display a summary of policy update status of registered mobile devices.
Mobile Device Health Status	Use this widget to display a summary of the health status of registered mobile devices.
Server component Healthy Status Summary	Use this widget to display the server components update status and their version numbers.
Mobile Device Operating System Version Summary	Use this widget to display the summary of the operating systems of registered mobile devices.
Android Device Operating System Version Summary	Use this widget to display the summary of the operating system version of registered Android mobile devices.
BlackBerry Device Operating System Version Summary	Use this widget to display the summary of the operating system version of registered BlackBerry mobile devices.
Symbian Device Operating System Version Summary	Use this widget to display the summary of the operating system version of registered Symbian mobile devices.
Windows Mobile Device Operating System Version Summary	Use this widget to display the summary of the operating system version of registered Windows Mobile devices.
iOS Device Operating System Version Summary	Use this widget to display the summary of the operating system version of registered iOS mobile devices.
Top 10 Applications Installed	Use this widget to display the list of top ten applications installed on registered mobile devices.
Telephone Carriers Summary	Use this widget to display a summary of telephone carriers for registered mobile devices.
Mobile Device Vendors Summary	Use this widget to display a summary of mobile device vendors of registered mobile devices.

WIDGET	PURPOSE
Mobile Device App Control Status Summary	Use this widget to display a summary of the app control status of registered mobile devices.
Mobile Device Encryption Status Summary	Use this widget to display a summary of the encryption status of registered mobile devices.
Android Device Encryption Status Summary	Use this widget to display a summary of the encryption status of registered Android mobile devices.
iOS Device Encryption Status Summary	Use this widget to display a summary of the encryption status of registered iOS mobile devices.
Mobile Device Jailbreak Status Summary	Use this widget to display a summary of the jailbreak status of registered mobile devices.
Android Device Jailbreak Status Summary	Use this widget to display a summary of the jailbreak status of registered Android mobile devices.
iOS Device Jailbreak Status Summary	Use this widget to display a summary of the jailbreak status of registered iOS mobile devices.
Top Five Blocked Web Sites	Use this widget to display the list of top five Web sites blocked by Mobile Security.
Top Five Malware Detected	Use this widget to display the list of top five malware detected by Mobile Security.

Configuring Widgets

Configuring a widget means modifying settings for the widget that are readily visible on the widget. The following table lists some examples of the widget settings administrators can modify.

TABLE 8-11. Configuring Widgets

SETTING	DESCRIPTION
Range	Modify the time range for data that displays: • Today • 1 week • 2 weeks • 1 month
Data aggregation	Modify the aggregation for the data: • Malicious URLs • Malicious files or • Product category • Threat type
Display	Modify how the data displays: • Bar chart • Line chart • Pie chart • Table

Editing Widgets

Editing a widget means modifying settings for the widget that are not readily visible on the widget. Click the edit icon to access these settings. Examples include:

TABLE 8-12. Editing Widgets

SETTING	DESCRIPTION
Title	Modify the name that displays for the widget.

SETTING	DESCRIPTION
Scope	Specifies the data source location for the widget. By default the widget displays data from all managed products that their user access allows.  WARNING! The data source has a significant impact on what the widget displays. Use care when modifying this setting. For example, someone specifies that the widget displays data for only a portion of your network.
Others	Some widgets provide settings to modify the amount of data a widget displays (range of entries) or the type of data that displays (security threat type or component type with the product type).

Procedure

1. Navigate to the **Dashboard** screen.
2. Click a tab that has a widget with an edit icon.
3. Click the **Edit** icon on the widget. The Edit screen appears.
4. Specify a meaningful title for the widget in the **Title** field.
5. Click the browse button next to **Scope**.
A version of the Product Directory appears.
6. Specify the data source for the widget from the Product Directory.
7. Click **OK**.
8. Specify values for any other settings available on the widget.



Note

For more information about "other" settings, check the Help for that specific widget.

9. Click **Save**.

The widget reloads applying the new settings.

Adding Widgets

The number of widgets that you can add to a tab depends on the layout for the tab. Once the tab contains the maximum number of widgets, you must remove a widget from the tab or create a new tab for the widget.

Procedure

1. Navigate to any tab on the dashboard.

2. Click **Add Widget**.

The **Add Widget** screen appears.

3. Click one of the following to filter the widgets that display:

Category	Description
Most Recent Widgets	Displays only the latest widgets available
All Widgets	Displays all widgets available
Compliance	Displays only widgets that contain compliance information (example: component compliance, product application compliance)
Data Loss Prevention	Displays only Data Loss Prevention widgets
Deep Security Manager	Displays only Deep Security Manager widgets
Endpoint Encryption	Displays only Endpoint Encryption widgets
Policy Management	Displays only Policy Management widgets
Smart Protection Network	Displays only Smart Protection Network widgets

Category	Description
Threat Statistics	Displays only widgets that contain threat statistic information (example: top threats in your network, total number of threats in your network)
Control Manager	Displays only Control Manager widgets
Smart Protection Server	Displays only Smart Protection Server widgets
Vulnerability Protection	Displays only Vulnerability Protection widgets.
Data Discovery	Displays only Data Discovery widgets.
Mobile Security	Displays only widgets with mobile security information.

4. Select one or more widgets to add to a tab.
5. Click **Add**.

Configuring Smart Protection Network Settings

Enable Trend Micro Smart Feedback to share threat information with the Trend Micro Smart Protection Network. This provides better protection for your network because Trend Micro is able to quickly identify and address new threats.

Enabling Smart Protection Network Settings is also required for some widgets to function. This is because the widgets receive their data directly from Trend Micro Smart Protection Network.



Note

Email Reputation, File Reputation, and Web Reputation are all part of the Smart Protection Network.

Procedure

1. Navigate to **Administration > Settings > Smart Protection Network Settings**.

The **Smart Protection Network Settings** screen appears.

2. Select **Enable Trend Micro Smart Feedback and Smart Protection Network widgets**.
 3. Specify how often Control Manager will send completely anonymous threat information to the Smart Protection Network from the **Time interval** drop-down list.
 4. Specify the industry that your company is in from the **Your industry** drop-down list.
 5. Click **Save**.
-

Configuring Deep Security Management Server Connection Settings

Widgets that get information from Deep Security must first connect to Deep Security.

Procedure

1. Navigate to **Administration > Settings > Deep Security Management**.

The **Deep Security Management** screen appears.

2. Configure the **Deep Security Management Server Connection Settings**:

- **Server name or IP address:** The server name or IP address for your Deep Security server
- **Port:** The port number used for communication with your Deep Security server
- **Username:** The user name required to log on to your Deep Security server
- **Password:** The password required to log on to your Deep Security server

3. To add more than one Deep Security server click the **+** icon.

You can add up to five Deep Security servers.

4. Click **Save**.
-

Chapter 9

Using Command Tracking

Use Command Tracking to view records of all commands issued to managed products and child servers.

This chapter contains the following topics:

- *Understanding Command Tracking on page 9-2*
- *Understanding Command Details on page 9-3*
- *Querying and Viewing Commands on page 9-4*

Understanding Command Tracking

The Control Manager server maintains a record of all commands issued to managed products and child servers. Commands refer to instructions given to managed products or child server to perform specific tasks (for example, performing a component update). Command Tracking enables you to monitor the progress of all commands.

For example, after issuing a Start Scan Now task, which can take several minutes to complete, you can proceed with other tasks and then refer to Command Tracking later for results.

The **Command Tracking** screen presents the following details in table format:

TABLE 9-1. Command Tracking Details

INFORMATION	DESCRIPTION
Date/Time Issued	The date and time when the Control Manager server issued the command to the managed product or child server
Command	The type of command issued
Successful	The number of managed products or child servers that completed the command
Unsuccessful	The number of managed products or child servers unable to perform the command
In Progress	The number of managed products or child servers that are currently performing the command
All	The total number of managed products and child servers to which Control Manager issued the command



Note

Clicking the available links in the **Successful**, **Unsuccessful**, **In Progress**, or **All** column opens the **Command Details** screen.

Understanding Command Details

The **Command Details** screen provides in-depth information about the result of a command. Control Manager records and groups command details according to the following:

- Managed products or services involved
- Details for individual products or services

The **Command Details** screen refreshes every 30 seconds.

Managed Products or Services Involved

TABLE 9-2. General Command Details

INFORMATION	DESCRIPTION
Started	Indicates the date and time when the Control Manager server issued the command to the managed product or child server, and additional command information. For example, when you invoke a Manual Download, the Issued field will contain the Parameter information about the component Control Manager could or could not download. A Manual Download Command Detail can have a Parameter called "engine". This parameter determines that Control Manager downloaded the scan engine component. For other commands that do not apply additional details, the Parameter is N/A.
Last Reported	Indicates the date and time when the Control Manager server received a response from a managed product or child server.
User	Indicates the user account that issued the task to the managed product or child server.
Successful	Indicates the number of managed products or child servers that completed the command.
Unsuccessful	Indicates the number of managed products or child servers that could not perform the command.

INFORMATION	DESCRIPTION
In Progress	Indicates the number of managed products or child servers that are currently performing the command.

Details for Individual Products or Services

TABLE 9-3. Command Details for Individual Products or Services

INFORMATION	DESCRIPTION
Last Reported	Indicates the date and time when the managed product sends a response to the Control Manager server
Server/Entity	Indicates the host name of the child or managed product server
Status	Indicates the status of the issued command • Successful • In Progress • Unsuccessful • Skip • Submit • Time Out • Not supported • Tracking • Cancelled • Successful • Accepted • Not Available • Unsuccessful
Description	Explains the Status

Querying and Viewing Commands

Use the **Command Tracking Query** screen to track and view previously issued commands.

Procedure

1. Navigate to **Administration > Command Tracking**.

The **Command Tracking** screen appears.

Command Tracking [Refresh](#) [Help](#)

The list below shows commands issued in the last 24 hours.
Use Query to search commands issued earlier.

1-15 of 21 log(s) [Next >>](#) | Page: [Go](#)

Date/Time Issued	Command	Successful	Unsuccessful	In Progress	All
4/18/2012 4:34:11 PM	Apply policy	0	1	0	1
4/18/2012 4:34:11 PM	Apply policy	0	1	0	1
4/18/2012 2:52:15 PM	Deploy pattern files/cleanup templates	1	1	0	2
4/18/2012 2:22:15 PM	Deploy pattern files/cleanup templates	1	1	0	2
4/18/2012 2:01:01 PM	Scheduled Download	1	0	0	1
4/18/2012 2:00:58 PM	Scheduled Download	1	0	0	1
4/18/2012 2:00:51 PM	Scheduled Download	1	0	0	1
4/18/2012 1:52:23 PM	Scheduled Download	1	0	0	1
4/18/2012 1:52:21 PM	Scheduled Download	1	0	0	1
4/18/2012 1:52:18 PM	Scheduled Download	1	0	0	1
4/18/2012 1:52:15 PM	Deploy pattern files/cleanup templates	1	1	0	2
4/18/2012 1:52:15 PM	Scheduled Download	1	0	0	1
4/18/2012 1:42:15 PM	Scheduled Download	1	0	0	1
4/18/2012 1:42:12 PM	Scheduled Download	1	0	0	1
4/18/2012 1:42:05 PM	Scheduled Download	1	0	0	1

[Query](#)

- On the working area, click **Query**.

The **Query (Command Tracking)** screen appears.

Query (Command Tracking) [Help](#)

Issued:

Start date:

End date:

Command:

User: (Blank for all)

Status: ☒ Successful
☒ Unsuccessful
☒ In progress

Sort records by:

Sort order:

[View Commands](#)

- On the **Query (Command Tracking)** screen, specify values for the following parameters:

- Issued:** Specify the time range for the query
Choose among the predetermined ranges, or specify your own range.
- Start date/End date:** Set the custom range based on months, days, or years

- **Command:** Select the command to monitor
- **User:** Provide the user account name to query. Leave this field blank to query commands issued by all users
- **Status:** Select the command status
- **Sort records by:** Specify how the **Query Result** screen will display results
Arrange the query results according to **Time**, **Command**, or **User**.
- **Sort order:** Specify whether the **Query Result** screen will display results in ascending or descending order

4. Click **View Commands**.

The **Query Result (Command Tracking)** screen shows the number of products affected by the command, as well as the results.

							Help
							1-15 of 147 log(s) Next >> Page: 1 Go
Date/Time Issued	Command	Issued User	Successful	Unsuccessful	In Progress	All	
4/18/2012 4:34:11 PM	Apply policy	root	0	1	0	1	
4/18/2012 4:34:11 PM	Apply policy	root	0	1	0	1	
4/18/2012 2:52:15 PM	Deploy pattern files/cleanup templates	root	1	1	0	2	
4/18/2012 2:22:15 PM	Deploy pattern files/cleanup templates	root	1	1	0	2	
4/18/2012 2:01:01 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 2:00:58 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 2:00:51 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:52:23 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:52:21 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:52:18 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:52:15 PM	Deploy pattern files/cleanup templates	root	1	1	0	2	
4/18/2012 1:52:15 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:42:15 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:42:12 PM	Scheduled Download	root	1	0	0	1	
4/18/2012 1:42:05 PM	Scheduled Download	root	1	0	0	1	
New Query							

- #### 5. Click the available link in the **Successful**, **Unsuccessful**, **In Progress**, or **All** column to view the specified Command Details.

Chapter 10

Using Notifications

Use Event Center to configure Control Manager to send notifications about events that occur in the Control Manager network.

This chapter contains the following topics:

- *Understanding Event Center on page 10-2*
- *Customizing Notification Messages on page 10-6*
- *Enabling or Disabling Notifications on page 10-11*
- *Understanding Notification Methods on page 10-12*
- *Configuring Notification Recipients and Testing Notification Delivery on page 10-16*
- *Configuring Alert Settings on page 10-18*
- *Configuring Data Loss Prevention Settings on page 10-24*

Understanding Event Center

Events refer to actions detected by a managed product and relayed to the Control Manager server. The Event Center enables you to set notifications for different events.

The Event Center categorizes events according to the following types:

TABLE 10-1. Event Center Events

EVENT TYPES	DESCRIPTION
Alert	Provides warning about viruses/spyware/grayware detected by antivirus managed products. For more information, see Alert Events on page 10-3 .
Outbreak Prevention Services	Provides information about policy application and update information about Outbreak Prevention Services (OPS). Outbreak Prevention Services notification types group the following service events: • Active Outbreak Prevention Policy received • Outbreak Prevention Mode started • Outbreak Prevention Mode stopped • Outbreak Prevention Policy update unsuccessful • Outbreak Prevention Policy update successful
Statistics	Provides "Violation Statistics" event notification for Network VirusWall products.
Update	Provides antivirus and content security component update results (successful or unsuccessful). For more information, see Update Alert Events on page 10-4 .
Unusual	Provides information about product options or service activation and deactivation. For more information, see Unusual Alert Events on page 10-5 .

EVENT TYPES	DESCRIPTION
Security Violation	Provides warning about email message content violations and client Web violations. For more information, see Security Violation Events on page 10-5 .
Data Loss Prevention	Provides information about Data Loss Prevention incidents and template matches. For more information, see Data Loss Prevention Events on page 10-5 .

Alert Events

TABLE 10-2. Alert Events

ALERT	DESCRIPTION
Virus outbreak alert	Applicable to antivirus managed products
Special virus alert	Applicable to antivirus managed products
Special spyware/grayware alert	Applicable to anti-spyware/grayware managed products
Virus found	The following options are available: • First action unsuccessful and second action unavailable - applicable to antivirus managed products • First and second actions unsuccessful - applicable to antivirus managed products • First action successful - applicable to antivirus managed products • Second action successful - applicable to antivirus managed products
Network virus alert	Applicable to packet-scanning products (for example, Network VirusWall Enforcer 1500)

ALERT	DESCRIPTION
Potential vulnerability attack detected	Applicable to packet-scanning products (for example, Network VirusWall 1500)
Spyware/Grayware found	The following options are available: - Action successful - applicable to anti-spyware/grayware managed products - Further action required - applicable to anti-spyware/grayware managed products
C&C callback alert	Applicable to antivirus and threat discovery managed products
C&C callback outbreak alert	Applicable to antivirus and threat discovery managed products

Update Alert Events

TABLE 10-3. Update Alert Events

ALERT	DESCRIPTION
Scan engine update unsuccessful	Applicable to antivirus managed products
Scan engine update successful	Applicable to antivirus managed products
Pattern files/Cleanup templates update unsuccessful	Applicable to antivirus managed products
Pattern files/Cleanup templates update successful	Applicable to antivirus managed products
Anti-spam rule update unsuccessful	Applicable to content security managed products
Anti-spam rule update successful	Applicable to content security managed products

Unusual Alert Events

TABLE 10-4. Unusual Alert Events

ALERT	DESCRIPTION
Real-time scan enabled	Applicable to antivirus managed products
Real-time scan disabled	Applicable to antivirus managed products
Product service started	Applicable to antivirus and content security managed products
Product service stopped	Applicable to antivirus and content security managed products

Security Violation Events

TABLE 10-5. Security Violation Events

ALERT	DESCRIPTION
Content security violation	Applicable to content security managed products. For example, InterScan Messaging Security Suite.
Web security violation	Applicable to Web security managed products. For example, InterScan Web Security Suite.

Data Loss Prevention Events

TABLE 10-6. Data Loss Prevention Events

ALERT	DESCRIPTION
Significant incident increase	Applicable to antivirus managed products
Significant template match increase	Applicable to antivirus managed products
Significant incident increase by user	Applicable to antivirus managed products

ALERT	DESCRIPTION
Significant incident increase by sender	Applicable to antivirus managed products
Significant incident increase by channel	Applicable to antivirus managed products
Scheduled incident summary	Applicable to antivirus managed products
Incident details updated	Applicable to antivirus managed products

Customizing Notification Messages

Use variables to customize event notifications. Insert these variables when you configure notifications to provide details to notification recipients.

Control Manager supports the following variables:

TABLE 10-7. Common Notification Message Variables

VARIABLE	DESCRIPTION
Common variables used by all event notifications	
%cmserver%	Control Manager server host name
%computer%	Network name of the computer where an event was detected
%entity%	Product Directory path of the managed product where an event occurred
%event%	Event that triggered the notification
%pname%	Managed product name
%pver%	Managed product version
%time%	Time (hh:mm) when an event occurred
%vloginuser%	The logon user information for customized events in spyware logs

VARIABLE	DESCRIPTION
%act%	The action taken by the managed product. Example: file cleaned, file deleted, file quarantined
%actresult%	The result of the action taken by the managed product. Example: successful, further action required

TABLE 10-8. Virus Notification Message Variables

VARIABLE	DESCRIPTION
Virus variables: Used by alert or Outbreak Prevention Service event notifications	
%device_ip%	IP address of an infected endpoint.
%engver%	• Scan engine version. • Used by the alert event category as well as the "Active Outbreak Prevention Policy received" and "Outbreak Prevention Mode started" notifications. For the notification types of the alert event category, this variable refers to the scan engine version currently installed on the managed product server. • For the "Active Outbreak Prevention Policy received" and "Outbreak Prevention Mode started" notifications, this variable refers to the Outbreak Prevention Policy required.
%ptnver%	• Virus pattern version. • Used by the alert event category and the "Active Outbreak Prevention Policy received" and "Outbreak Prevention Services started" notifications. For the notification types of the alert event category, this variable refers to the virus pattern version currently installed on the managed product server. • For the "Active Outbreak Prevention Policy received" and "Outbreak Prevention Services started" notifications, this variable refers to the Outbreak Prevention Policy required.

VARIABLE	DESCRIPTION
%scanmethod%	The scan method for specific virus actions. This token is only available for the following alerts: • Virus found-first action unsuccessful and second action unavailable • Virus found-first and second actions unsuccessful • Virus found-first action successful • Virus found-second action successful
%threat_info%	• Virus/malware threat information provided by outbreak prevention policies. • Used by "Active Outbreak Prevention Policy received" and "Outbreak Prevention Services started."
%vcnt%	• Virus count. • Used by virus outbreak alert.
%vdest%	• Virus/malware destination. • For example, the intended recipient takes the value of %vdest% if an antivirus managed product detected a virus/malware in an email message. • Used by alert event category.
%vfile%	Infected file name. Used by alert event category.
%vfilepath%	Infected file directory. Used by alert event category.
%vname%	Virus or malware name. Used by alert event category.
%vsrc%	• Virus/malware origin or infection source. • For example, the message sender takes the value of %vsrc% if an antivirus managed product detected a virus/malware in an email message. • Used by the alert event category as well as the network virus alert notification type.

TABLE 10-9. Special Notification Message Variables

VARIABLE	DESCRIPTION
Special variables: Used by Network VirusWall Enforcer task completed-related events	
%action%	Network VirusWall Enforcer action (pass, drop, or quarantine) on network virus.
%description%	Error description used by the potential vulnerability attack detected events.

TABLE 10-10. DLP Notification Message Variables

VARIABLE	DESCRIPTION
DLP variables: Used by scheduled incident summary and incident details updated events	
%DLP_INCIDENT_TOTAL_NUM%	The total number of incidents triggered by directly managed users
%DLP_INCIDENT_HIGH_NUM%	The total number of high severity incidents triggered by directly managed users
%DLP_INCIDENT_MEDIUM_NUM%	The total number of medium severity incidents triggered by directly managed users
%DLP_INCIDENT_LOW_NUM%	The total number of low severity incidents triggered by directly managed users
%DLP_INCIDENT_INFORMATIONAL_NUM%	The total number of informational incidents triggered by directly managed users
%DLP_INCIDENT_UNDEFINED_NUM%	The total number of undefined severity incidents triggered by directly managed users
%DLP_INCIDENT_ALLTOTAL_NUM%	The total number of incidents triggered by all managed users
%DLP_INCIDENT_ALLHIGH_NUM%	The total number of high severity incidents triggered by all managed users
%DLP_INCIDENT_ALLMED_NUM%	The total number of medium severity incidents triggered by all managed users

VARIABLE	DESCRIPTION
%DLP_INCIDENT_AL LLOW_NUM%	The total number of low severity incidents triggered by all managed users
%DLP_INCIDENT_AL LINFO_NUM%	The total number of informational incidents triggered by all managed users
%DLP_INCIDENT_AL LUNDEFINED_NUM%	The total number of undefined severity incidents triggered by all managed users
%DLP_START_TIME%	The start date and time for the reporting period
%DLP_END_TIME%	The end date and time for the reporting period
%weblink%	The link to view details of the incident information listed in the notification message
%INCIDENTID%	Incident ID number
%SEVERITY%	Incident severity level
%POLICY%	Control Manager policy name  Note For incidents triggering DLP policies created in managed products, this appears as N/A.
%ACCOUNT%	User name
%OLD_STATUS%	Incident status before modification
%NEW_STATUS%	Incident status after modification
%LATEST_COMMENT%	The latest comments about the incident

TABLE 10-11. C&C Callback Notification Message Variables

VARIABLE	DESCRIPTION
%CALLBACK_ADDR%	URL, IP address, or email address to which a compromised host attempts a callback
%COMPR_HOST%	Affected host or email address

VARIABLE	DESCRIPTION
%CnC_LIST_SRC%	Name of the list that contains the callback address
%CALLBACK_NUM%	Number of contacts made between callback addresses and compromised hosts
%COMPR_HOST_NUM%	Number of compromised hosts involved in the outbreak
%CALLBACK_ADDR_NUM%	Number of callback addresses involved in the outbreak

TABLE 10-12. Update Notification Message Variables

VARIABLE	DESCRIPTION
Update variables: Used by update related events	
%update_info%	The version of an updated pattern. Used by the update event category. The supported pattern file can be defined with the tag <code>m_strUpdatePatternPassList</code> in <code>SystemConfiguration.xml</code>.

Enabling or Disabling Notifications

Enable or disable notifications from the **Event Center** screen.

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

Event Center	
Configure the listed notifications to allow Control Manager to automatically contact you with a method of your preference when a specified event occurs.	
Event Category	
☐ Alert	
☐ Outbreak Prevention Services	
☐ Statistics	
☐ Update	
☐ Unusual	
☐ Security violation	
☐ Data Loss Prevention	
Save Reset	

2. Expand the Event Category containing the event notification to enable or disable.
3. Do one of the following:
 - Select or clear specific event check boxes.
 - Select or clear the **Event** check box to select all notifications for an entire section.
4. Click **Save**.

Understanding Notification Methods

Control Manager can notify individuals or groups of recipients about events that occur in the Control Manager network. Configure Event Center to send notifications through the following methods:

TABLE 10-13. Notification Delivery Methods

DELIVERY METHOD	DESCRIPTION
Email	Messages sent to a mailbox belonging to the organization's email message system or to an SMTP account (for example, Yahoo!™ or Hotmail™).
Windows event log	The Windows Event Viewer application log contains events logged by Control Manager.


DELIVERY METHOD	DESCRIPTION
SNMP trap	An SNMP (Simple Network Management Protocol) trap is a method of sending notifications to network administrators who use web consoles that support this protocol. Control Manager stores notification in Management Information Bases (MIBs). Use the MIBs browser to view SNMP trap notification.
Pager	An electronic device that accepts messages from a special radio signal.
Trigger Application	Any in-house or industry-standard application used by your organization to send notification. For example, your organization is using a batch file that calls the "net send" command. Use the Parameters field to define commands applied by the trigger application.
MSN Messenger	An online service provided by Microsoft that establishes real-time communication between two users. Control Manager sends notifications to an online MSN Messenger account. An off-line MSN Messenger account cannot receive Control Manager notifications.
Syslog	A standard for forwarding log messages in an IP network. Control Manager can direct syslogs to other supported products. For example, Cisco Security Monitoring, Analysis and Response System (MARS)

Configuring Notification Method Settings

Procedure

- Navigate to **Administration > Event Center > General Event Settings**.

The **Event Center Settings** screen appears.

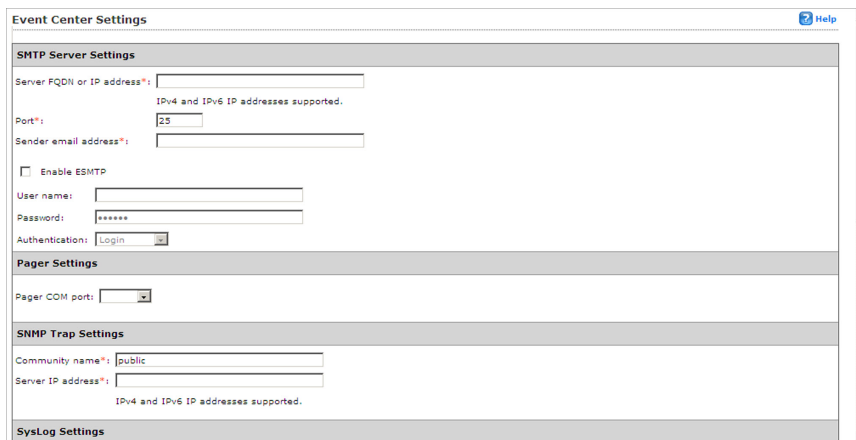

The screenshot shows the 'Event Center Settings' window. It has a title bar with a 'Help' icon. The window is divided into four sections: 'SMTP Server Settings', 'Pager Settings', 'SNMP Trap Settings', and 'SysLog Settings'. The 'SMTP Server Settings' section includes fields for 'Server FQDN or IP address*', 'Port*' (set to 25), and 'Sender email address*'. It also has a checkbox for 'Enable ESMTP'. Below this are fields for 'User name:', 'Password:', and an 'Authentication:' dropdown set to 'Login'. The 'Pager Settings' section has a 'Pager COM port:' dropdown. The 'SNMP Trap Settings' section has fields for 'Community name*' (set to 'public') and 'Server IP address*'. The 'SysLog Settings' section is currently empty. A vertical scrollbar is on the right side of the window.

See the following sections for details about configuring different notification methods.

Setting Email Notifications

Procedure

1. Under **SMTP Server Settings**, type the fully qualified domain name (FQDN) (for example, proxy.company.com) or IP address of the SMTP server in the field provided.
2. Specify the port number in the **Port** field.
3. Type the Control Manager sender email address in the field provided. Control Manager uses this address as the sender address (a requirement for some SMTP servers).
4. To use ESMTP, select **Enable ESMTP**.
5. Type the user name and password in the fields provided for ESMTP authentication.

6. Select the authentication method from the **Authentication** list.
 7. Click **Save**.
-

Setting Pager Notifications

Procedure

1. Under **COM Port**, select the appropriate **Pager COM port** from the list.
 2. Click **Save**.
-

Setting SNMP Notifications

Procedure

1. Under **SNMP Trap Settings**, specify the **Community name**.
 2. Specify the SNMP trap **Server IP address**.
 3. Click **Save**.
-

Setting Syslog Notifications

Procedure

1. Under **Syslog Settings**, type the **Server IP address** and **Server Port** of the syslog server.
 2. Select the **Facility** for syslogs from the list.
 3. Click **Save**.
-

Triggering a Specified Application

Procedure

1. Under **Trigger Application Settings**, select **Use a specified user to trigger the application**.
 2. Type the user name and password of the user who triggers the specified application.
 3. Click **Save**.
-

Setting MSN Messenger Notifications

Procedure

1. Under **MSN Messenger Settings**, specify the **MSN Messenger email address**. This is the user name in MSN Messenger.
 2. Type the email address password.
 3. If you use a proxy server to connect to the Internet, select **Connect using a proxy server** to connect to the MSN server.
 - a. Specify the proxy server **Host name** and **Port**.
 - b. Select the proxy server protocol—**SOCKS 4** or **SOCKS 5**.
 - c. Type the **logon name** and **password** used for proxy authentication.
 4. Click **Save**.
-

Configuring Notification Recipients and Testing Notification Delivery

Use the **Edit Recipients** screen to configure the notification recipients for each event.

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.
The **Event Center** screen appears.
2. Expand the Event Category containing the event notification to configure.
3. Click the **Recipients** link of the event to configure.

The **Edit Recipients** screen appears.

4. Under **Recipients**, add or remove users in the Selected Users and Groups list for notification recipients:
 - To add recipients to the list:
 - a. Click the user or group from the Available Users and Groups list. To select multiple recipients, use the CTRL key.
 - b. Click > to add the entry to the **Selected Users and Groups** list.
 - To remove a recipient from the list:
 - a. Click the user or group from the Selected Users and Groups list. To select multiple recipients, use the CTRL key.

- b. Click > to remove the entry from the Selected Users and Groups list.
5. Select a notification method: Configure the notification method settings through the **Event Center Settings** screen.

Refer to *Configuring Notification Method Settings on page 10-13*.

6. Expand the notification method and provide a **notification message** in the corresponding message fields.
7. Click **Save**.



Note

You can also click **Test** to determine if your system can deliver the notifications. Control Manager will save the settings after the test. However, the test function is not available in some events.

Configuring Alert Settings

Alert settings specify when a notification is sent to an administrator or other recipients.

The following table lists the notifications that support modification of notification triggers.

TABLE 10-14. Alert Settings

ALERT	DESCRIPTION
Virus outbreak	Provides a system-wide perspective on virus/malware outbreaks
Special virus	Provides an early warning of a potential virus/malware outbreak
Special spyware/grayware	Provides an early warning of a potential spyware/grayware outbreak
Network virus	Provides a system-wide perspective of a potential network virus outbreak

ALERT	DESCRIPTION
Potential vulnerability attack detected	Provides a system-wide perspective of a potential attack caused by system vulnerabilities
C&C callback and callback outbreak	Provide system-wide perspectives of potential C&C callback alerts and outbreaks

Configuring Virus Outbreak Alert Settings


Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Alert** Event Category, and click the **Settings** link for **Virus outbreak alert**.

The **Virus Outbreak Alert Settings** screen appears.

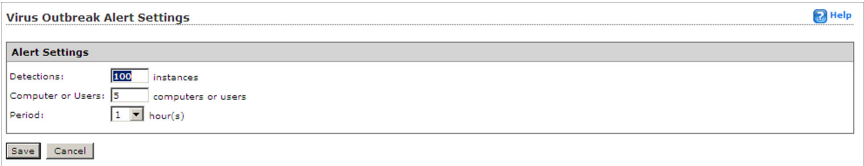

3. Under **Alert Settings**, provide the following:
 - **Detections:** The number of viruses that triggers an outbreak alert
 - **Computer or Users:** The number of computers/users infected
 - **Period:** The period of consideration for virus count parameter
4. Click **Save**.

Configuring Special Virus Alert Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Alert** Event Category, and click the **Settings** link for **Special virus alert**.

The **Special Virus Alert Settings** screen appears.

Special Virus Alert Settings

Virus Name

PE_NIMDA Add Remove

WORM_BADTRANS Add Remove

WORM_SIRCAM Add Remove

PE_MAGISTR Add Remove

PE_FUNLOVE Add Remove

Alert Settings

Period: 1 hour(s)

Save Cancel

3. Type the name of the viruses to monitor.
You can specify up to 10 viruses.
 4. Under **Alert Settings**, specify the **Period** (in hours).
 5. Click **Save**.
-

Configuring Special Spyware/Grayware Alert Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

- Expand the **Alert** Event Category, and click the **Settings** link for **Special spyware/grayware alert**.

The **Special Spyware/Grayware Alert Settings** screen appears.

- Type the names of the spyware/grayware to monitor.
You can list up to 10 items of spyware/grayware.
- Under **Alert Settings**, specify the **Period** (in hours).
- Click **Save**.

Configuring Network Virus Alert Settings

Procedure

- Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

- Expand the **Alert** Event Category, and click the **Settings** link for **Network virus alert**.

The **Network Virus Alert Settings** screen appears.

3. Under Alert Settings, provide the following:
 - **Detections:** The number of viruses that trigger an outbreak alert
 - **Computer or Users:** The number of computers or users infected
 - **Period:** The period of consideration for the virus count parameter
 4. Click **Save**.
-

Configuring Potential Vulnerability Attack Detected Settings


Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Alert** Event Category, and click the **Settings** link for **Potential vulnerability attack detected**.

The **Edit Potential Vulnerability Attack Settings** screen appears.

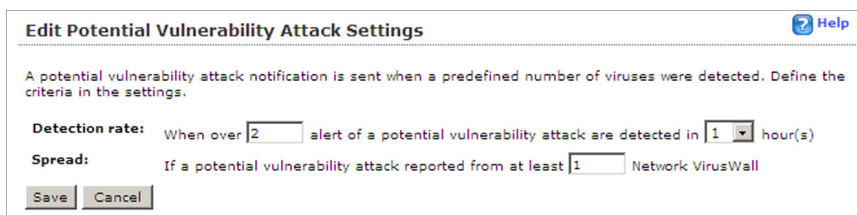

Edit Potential Vulnerability Attack Settings [Help](#)

A potential vulnerability attack notification is sent when a predefined number of viruses were detected. Define the criteria in the settings.

Detection rate: When over alert of a potential vulnerability attack are detected in hour(s)

Spread: If a potential vulnerability attack reported from at least Network VirusWall

3. Provide values for the following:
 - **Detection rate:** The number of alerts triggered over time
 - **Spread:** The number of Network VirusWall Enforcer devices which report the attack

4. Click **Save**.
-

Configuring C&C Callback Alert Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.
The **Event Center** screen appears.
 2. Expand the **Alert** Event Category, and click the **Settings** link for **C&C callback alert**.
The **C&C Callback Alert Settings** screen appears.
 3. Select the type of C&C list source to include in the notification message.
 4. Click **Save**.
-

Configuring C&C Callback Outbreak Alert Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.
The **Event Center** screen appears.
2. Expand the **Alert** Event Category, and click the **Settings** link for **C&C callback outbreak alert**.
The **C&C Callback Outbreak Alert Settings** screen appears.
3. Select the type of C&C list source to include in the notification message.
4. Provide the following:
 - **Callback attempts:** The number of callback attempts that trigger an outbreak alert

- **Compromised hosts:** The number of affected hosts or email addresses
- **Period:** The period of consideration for callback count parameter

5. Click **Save**.

Configuring Data Loss Prevention Settings

Use the Data Loss Prevention setting screens to specify the time and type of information to send to administrators or other recipients.

Configuring Significant Incident Increase Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Data Loss Prevention** Event Category, and click the **Settings** link for one of the significant incident increase notifications.

The settings screen for the selected DLP notification appears.

3. Specify the numbers of instances required to trigger the notification in the following fields:

- **Hourly**
- **Daily**

4. Click **Save**.
-

Configuring Scheduled Incident Summary Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Data Loss Prevention** Event Category, and click the **Settings** link for Scheduled incident summary.

The **Scheduled Incident Summary Settings** screen appears.

3. Under **Frequency**, specify how often to send a notification:

- **Daily**
- **Weekly**



Note

Control Manager starts to generate notifications at 03:00 on the specified date and updates the status in the **Last notification sent** field.

4. To include an attachment with incident details in the notification, select **Attach incident details** in the following format:

- CSV (*.csv)
- Microsoft Excel (*.xls): charts are included



Note

Remind incident reviewers to handle the matched content in the attachment with caution, as copying or forwarding the content can trigger additional DLP incidents. Alternatively, administrators can set up exceptions in the DLP rules for actions taken on the matched content.

5. Click **Save**.
-

Configuring Incident Details Updated Settings

Procedure

1. Navigate to **Administration > Event Center > Event Notifications**.

The **Event Center** screen appears.

2. Expand the **Data Loss Prevention** Event Category, and click the **Settings** link for Incident details updated.

The **Incident Details Updated Settings** screen appears.

3. Specify the updated information to receive:
 - **Closed:** Select this to receive notifications when an incident has been closed.
 - **Any change:** Select this to receive notifications for any updates, including status change and comment edits.
 4. To receive notifications about specific severity levels, specify the filter options:
 - **High**
 - **Medium**
 - **Low**
 - **Informational**
 - **Undefined**
 5. Click **Save**.
-

Chapter 11

Working with Logs

Query logs from all managed products registered to Control Manager from the **Ad Hoc Query** screen.

This chapter contains the following topics:

- *Using Logs on page 11-2*
- *Understanding Log Aggregation on page 11-4*
- *Querying Log Data on page 11-5*
- *Understanding Ad Hoc Queries on page 11-11*
- *Working with Saved and Shared Ad Hoc Queries on page 11-19*
- *Deleting Logs on page 11-26*

Using Logs

Although Control Manager receives data from various log types, Control Manager allows users to query the log data directly from the Control Manager database. Users can then specify filtering criteria to gather only the data they need.

Control Manager also introduces log aggregation. Log aggregation can improve query performance and reduce the network bandwidth managed products require when sending logs to Control Manager. However, this comes at a cost of lost data through aggregation. Control Manager cannot query data that does not exist in the Control Manager database.

Understanding Control Manager Generated Logs

Control Manager logs consist of two categories: License and Control Manager Information.

TABLE 11-1. Control Manager Logs

CATEGORY LOG	DESCRIPTION
License Information	These logs record license information for Control Manager and managed products registered to the Control Manager server. • Product License Status • Product License Information Summary • Detailed Product License Information
Control Manager Information	These logs record user actions and product events. • User Access Information • Control Manager Event Information • Command Tracking Information • Detailed Command Tracking Information

Understanding Managed Product Logs

Managed product logs contain information about the performance of your managed products. You can obtain information for specific products or groups of products administered by the parent or child server. With Control Manager's data query on logs and data filtering capabilities, administrators can focus on the information they need.

**Note**

More logs mean abundant information about the Control Manager network. However, these logs occupy disk space. You must balance the need for information with your available system resources.

Managed products generate different kinds of logs depending on their function.

TABLE 11-2. Managed Product Logs

LOG CATEGORY	DESCRIPTION
Product Information	Product information logs provide information on subjects ranging from user access and events on managed products to component deployment and update status. • Managed Product Information • Component Information
Security Threat Information	Security threat logs provide information on known and potential security threats detected on your network. • Virus/Malware Information • Spyware/Grayware Information • Content Violation Information • Spam Violation Information • Policy/Rule Violation Information • Web Violation/Reputation Information • Suspicious Threat Information • Overall Threat Information

LOG CATEGORY	DESCRIPTION
Data Protection Information	Data Protection logs provide information on DLP incidents, template matches, and incident sources. • Data Loss Prevention Information • Data Discovery Information

Understanding Log Aggregation

Control Manager log aggregation provides a way for administrators to decrease the impact that managed products have on network bandwidth. By configuring log aggregation administrators can choose which log information managed products send to Control Manager.



Note

Log aggregation comes at a cost. Information that managed products do not send to Control Manager is lost. Control Manager cannot create reports or queries for information the server does not have. This can raise issues if information that seems unimportant, and managed products drop, later becomes of critical importance with no way to recover the dropped data.

Configuring Log Aggregation Settings

Procedure

1. Navigate to **Logs > Log Aggregation Settings**.

The **Edit Log Aggregation Rule** screen appears.

Edit Log Aggregation Rule

☐ Enable log aggregation

Log Aggregation Settings

Clear the check boxes for data that managed products will not send to Control Manager.

- ☐ Virus log
- ☐ Content security log
- ☐ Desktop spyware/grayware detection log
- ☐ Personal firewall log

Save Cancel

2. Select **Enable log aggregation**.
3. Expand the required log categories.
4. Clear the check boxes for data that managed products will not send to Control Manager.
5. Click **Save**.

Querying Log Data

Ad Hoc Queries provide administrators with a quick method to pull information directly from the Control Manager database. The database contains all information collected from all products registered to the Control Manager server (log aggregation can affect the data available to query). Ad Hoc Queries provide a very powerful tool for administrators.

While querying data, administrators can filter the query criteria so only the data they need returns. Administrators can then export the data to CSV or XML format for further analysis or save the query for future use. Control Manager also supports sharing saved queries with other users so others can benefit from useful queries.

Completing an Ad Hoc query consists of the following process:

- Step 1: Select the managed product or current Control Manager server for the query
- Step 2: Select the data view to query
- Step 3: Specify filtering criteria and the specific information that displays
- Step 4: Save and complete the query
- Step 5: Export the data to a CSV or XML file

**Note**

Control Manager supports sharing saved Ad Hoc Queries with other users. Saved and shared queries appear on the **Saved Ad Hoc Queries** screen.

Understanding Data Views

A data view is a table consisting of clusters of related data cells. Data views provide the foundation on which users perform Ad Hoc Queries to the Control Manager database.

Control Manager allows direct queries to the Control Manager database. Data views are available to Custom report templates and to Ad Hoc Query requests.

Data views are tables filled with information. Each heading in a data view acts as a column in a table. For example, the Virus/Malware Action/Result Summary data view has the following headings:

- **Action Result**
- **Action Taken**
- **Unique Endpoints**
- **Unique Sources**
- **Detections**

As a table, a data view takes the following form with potential subheadings under each heading:

TABLE 11-3. Sample Data View

ACTION RESULT	ACTION TAKEN	UNIQUE ENDPOINTS	UNIQUE SOURCES	DETECTIONS

This information is important to remember when specifying how data displays in a report template.

Control Manager separates data views into three major categories: Product Information, Security Threat Information, and Data Protection Information. See the appendix for more information about data views. The major categories separate further into several subcategories, with the subcategories separated into summary information and detailed information.

Related information

- [Product Information](#)
- [Security Threat Information](#)
- [Data Protection Information](#)

Product Information

Product Information data views provide information about Control Manager, managed products, components, and product licenses.

TABLE 11-4. Product Information Data Views

CATEGORY	DESCRIPTION
Control Manager Information	Displays information about Control Manager user access, Command Tracking information, and Control Manager server events.
Managed Product Information	Displays status, detailed, and summary information about managed products or managed product endpoints.
Component Information	Displays status, detailed, and summary information about out of date and up to date and component deployment of managed product components.

CATEGORY	DESCRIPTION
License Information	Displays status, detailed, and summary information about Control Manager and managed product license information.

Security Threat Information

Displays information about security threats that managed products detect: viruses, spyware/grayware, phishing sites, and more.

TABLE 11-5. Security Threat Information Data Views

CATEGORY	DESCRIPTION
Overall Threat Information	Displays summary and statistical data about the overall threat landscape of your network.
Virus/Malware Information	Displays summary and detailed data about malware/viruses that managed products detect on your network.
Spyware/Grayware Information	Displays summary and detailed data about spyware/grayware that managed products detect on your network.
Content Violation Information	Displays summary and detailed data about prohibited content that managed products detect on your network.
Spam Violation Information	Displays summary and detailed data about spam that managed products detect on your network.
Web Violation Information	Displays summary and detailed data about Internet violations that managed products detect on your network.
Policy/Rule Violation Information	Displays summary and detailed data about policy/rule violations that managed products detect on your network.
Suspicious Threat Information	Displays summary and detailed data about suspicious activity that managed products detect on your network.

**Note**

See [Data View: Security Threat Information on page B-18](#) for more information about the available data views Control Manager supports.

Data Protection Information

The Data Loss Prevention Information category displays detailed information about the DLP incidents, incident sources, and template matches that manage products collect on your network.

TABLE 11-6. Data Protection Information Data Views

CATEGORY	DESCRIPTION
Data Loss Prevention Information	Displays summary and detailed data about incidents that DLP found on your network or detections that match available DLP templates.
Data Discovery Information	Displays summary and detailed data about DLP detections or Data Discovery endpoints, including detailed information about sensitive files and OfficeScan endpoints.

Data View Terminology

Control Manager uses the following terms in data views, returned queries, and generated reports.

**Note**

For a complete list of data view terminology, see [Data Views on page B-1](#).

TABLE 11-7. Data View Terminology

DATA	DESCRIPTION
Endpoint	Displays the IP address or host name of a computer.
IP	Displays the IP address of a computer.

DATA	DESCRIPTION
Port	Displays the port number of an computer.
MAC	Displays the MAC address of an computer.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product Host	Displays the host name of the server on which the managed product installs.
Product IP	Displays the IP address of the server on which the managed product installs.
Product MAC	Displays the MAC address of the server on which the managed product installs.
Product Version	Displays the managed product's version number. Example: OfficeScan 10.0, Control Manager 5.0
Source Host	Displays the IP address or host name of the computer where security threats originate.
Source IP	Displays the IP address of the computer where security threats originate.
Source Port	Displays the port number of the computer where security threats originate.
Source MAC	Displays the MAC address of the computer where security threats originate.
Unique Endpoints	Displays the number of unique computers affected by security threats. Example: OfficeScan detects 10 virus instances of the same virus on 3 different computers. Unique Endpoints = 3

DATA	DESCRIPTION
Unique Sources	Displays the number of unique infection sources where security threats originate. Example: OfficeScan detects 10 virus instances of the same virus originating from 2 infection sources. Unique Sources = 2
Unique Senders/ Users	Displays the number of unique email message addresses or users sending content that violates managed product policies. Example: A managed product detects 10 violation instances of the same policy coming from 3 computers. Unique Senders/Users = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product policies. Example: A managed product detects 10 violation instances of the same policy on 2 computers. Unique Recipients = 2
Unique Detections	Displays the number of unique virus/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Unique Detections = 1
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Understanding Ad Hoc Queries

An Ad Hoc Query is a direct request to the Control Manager database for information. The query uses data views to narrow the request and improve performance. After

specifying the data view, users can further narrow their search by specifying filtering criteria for the request.

**Note**

For more information on data views see [Understanding Data Views on page 11-6](#).

For example, Chris, an OfficeScan administrator, wants to check the status of pattern files for the OfficeScan servers for which she is responsible. Chris first selects **Managed Products**. She then selects the data view **Pattern/Rule Status** found under **Product Information > Component Information**. Proceeding to the next step in the process, she specifies the filtering criteria as follows: Product Type: OfficeScan, Pattern Status: Out-of-date. Clicking **Change column display**, Chris also selects the fields the query displays after the query completes. Chris selects the following to display: Pattern Version, Host Name, IP Address. She does not select Product Name or Pattern Status, because she already knows the results that Control Manager returns meet that criteria.

**Note**

Saving an Ad Hoc Query saves only the criteria specified for the query. The data an Ad Hoc Query returns does not save. To save the data, export the query results or create a report using a grid table.

Performing an Ad Hoc Query

Procedure

1. Navigate to **Logs > New Ad Hoc Query**.

The **Ad Hoc Query** screen appears.



2. Follow the steps below to perform an Ad Hoc Query.

Step 1: Specify the Origin of the Information

Procedure

1. From the **Ad Hoc Query** screen, select the origin for the information query:

- **Select Control Manager:** Specifies that information originates from the Control Manager server to which the user is currently logged on.

Specifying this option disables the Product Tree, because the information only comes from the Control Manager server to which the user is logged on.

- **Select Product Tree:** Specifies that information originates from the managed products the Control Manager server manages. This can include managed products from child Control Manager servers.

After specifying this option, the user must then select the managed products or directory from which the information originates.

**Note**

Selecting the managed product or directory on this screen affects the available data views on the following screen. For example, by selecting OfficeScan in the product directory, only data views associated with OfficeScan display in the Available Data Views list.

2. Click **Next**.

The **Step 2: Data View** screen appears.



Step 2: Specify a Data View for the Query

Procedure

1. Select a data view from the **Available Data Views** list.

For more information on data views, see [Understanding Data Views on page 11-6](#).

2. Click **Next**.

The **Step 3: Query Criteria** screen appears.

Ad Hoc Query Help

Step 1 >>> Step 2 >>> **Step 3: Query Criteria**

Result Display Settings

Selected View: Control Manager Event Information Change column display

Criteria Settings

☒ Required criteria

☒ Custom criteria

Match: All of the criteria

Note: Columns marked with asterisk (*) can be selected to filter data only once.

Date/Time is between last7days% and now% AND OR + -

Save Query Settings

☐ Save this query to the saved Ad Hoc Queries list.

Query Name: Control Manager Event Information_2012_04_18

< Back Query Cancel

Step 3: Specify the Display Sequence

Procedure

1. Click **Change Column Display**.

The **Select Display Sequence** screen appears.

Select Display Sequence Help

Sequence

Select fields to display on the results:

Available Fields

>

<

Selected Fields

Date/Time
Event Type
Result
Description

Move Up
Move Down

< Back Cancel

2. From the **Available Fields** list, select the data view columns to display when the query returns information.

Selected columns highlight.



Note

Select the columns one at a time or use the SHIFT or CTRL keys to select multiple columns.

Selecting and adding one column at a time is one method that allows users to specify the sequence in which the information displays.

3. Click  to include the fields in the **Selected Fields** list.

Selected columns appear in the Selected Fields list.

4. Continue selecting and adding columns until you have all the columns you require.
5. Use the **Move Up** and **Move Down** buttons, after selecting a column in the Selected Fields list, to specify the display sequence of the information. The column at the top of the list appears as the left-most column in the returned query.
6. Click **Back**.

The **Step 3: Query Criteria** screen appears.

Ad Hoc Query Help

Step 1 >>> Step 2 >>> **Step 3: Query Criteria**

Result Display Settings

Selected View: Control Manager Event Information Change column display

Criteria Settings

☒ Required criteria

☒ Custom criteria

Match: All of the criteria

Note: Columns marked with asterisk (*) can be selected to filter data only once.

Date/Time is between %last7days% and %now%

Save Query Settings

☐ Save this query to the saved Ad Hoc Queries list.

Query Name: Control Manager Event Information_2012_04_18_

< Back Query Cancel

Step 4: Specify the Filtering Criteria

Procedure

1. Specify the **Required Criteria**:

- Specify a Summary Time for the data, and for spyware/grayware data views, whether you want COOKIES to appear in your results.

2. Specify the **Custom Criteria**:

a. Select **Custom criteria**.

The custom criteria options appear.

b. Specify the criteria filtering rules for the data categories from the **Match** field:

- All of the criteria:** This selection acts as a logical “AND” function. Data appearing in the report must meet all the filtering criteria.
- Any of the criteria:** This selection acts as a logical “OR” function. Data appearing in the report must meet any of the filtering criteria.

- c. Specify the filtering criteria for the data. Control Manager supports specifying up to 20 criteria for filtering data.

**Note**

If you do not specify any filtering criteria, the Ad Hoc Query returns all results for the applicable columns. Trend Micro recommends specifying filtering criteria to simplify data analysis after the information for the query returns.

- i. From the left-most drop-down list, select the column to filter.
 - ii. From the middle drop-down list, select the matching condition for the filter.
 - iii. In the right-most field, provide the filter criteria. A list box or text box appears here depending on the column selected to filter.
 - iv. Click the **+** icon to add another filter criterion for the data view.
-

Step 5: Save and Complete the Query

Procedure

1. Click **Save this query to the saved Ad Hoc Queries list** under **Save Query Settings** to save the Ad Hoc Query.
 2. Specify an Ad Hoc Query name in the **Query Name** field.
-

**Note**

Control Manager supports sharing saved Ad Hoc Queries with other users. Saved Queries appear on the **Saved Ad Hoc Queries** screen.

3. Click **Query**.

The **Ad Hoc Query Results** screen appears displaying the results of the query.

For more detailed information about a given item, click the underlined link for the item.

Step 6: Export the Query Results to CSV or XML

Procedure

1. A **File Download** dialog box appears after clicking one of the following:
 - **Export to CSV**: Exports the query results to CSV format.
 - **Export to XML**: Exports the query results to XML format.
 2. Complete one of the following:
 - Click **Open** to view the query results immediately in CSV or XML format.
 - Click **Save**. A **Save As** dialog box appears. Specify the location to save the file.
 3. To save the settings for the query:
 - a. Click **Save query settings**.
A confirmation dialog box appears.
 - b. Type a name for the saved query in the **Query Name** field.
 - c. Click **OK**.
The saved query appears on the **Saved Ad Hoc Queries** screen.
-

Working with Saved and Shared Ad Hoc Queries

Control Manager supports saving an Ad Hoc Query a user creates. Saved Ad Hoc Queries appear on the **Saved Ad Hoc Queries** screen. The **Saved Ad Hoc Queries** screen contains two tabs: **My Queries** and **Available Queries**.

The **My Queries** section of the **Saved Ad Hoc Queries** screen displays all Ad Hoc Queries the logged on user created. From the **My Queries** tab, the user can add, edit,

view, delete, export, and share/unshare queries. Sharing saved queries makes the queries available to other users.

**Note**

Control Manager access control, provided by the user account and user role, restricts the information to which a user has access. This means that even though all users can view shared queries, access control limits the effectiveness of the query.

Example:

OfficeScan administrator Chris creates and shares an Ad Hoc Query that targets OfficeScan server information. ScanMail for Exchange administrator Sam has access to the shared query, but if she tries to generate an Ad Hoc Query using Chris' query, the query returns blank. This occurs because Sam does not have access to OfficeScan server information. This example assumes Chris only has access to OfficeScan servers and Sam only has access to ScanMail for Exchange servers.

Editing Saved Ad Hoc Queries

Control Manager supports modifying saved Ad Hoc Queries from the **My Queries** tab of the **Saved Ad Hoc Queries** screen. Modifying a saved Ad Hoc Query requires the following steps:

Step 1: Select the managed product or current Control Manager server for the query

Step 2: Select the Data View to query

Step 3: Specify filtering criteria, and the specific information that displays

Step 4: Save and complete the query

Step 5: Export the data to CSV or XML

Procedure

1. Navigate to **Logs > Saved Ad Hoc Queries**.

The **Saved Ad Hoc Queries** screen appears.

2. Click the name of the saved Ad Hoc Query to edit.

The **Select Product Tree** screen appears.

Step 1: Specify the Origin of the Information

Procedure

1. From the **Ad Hoc Query** screen, specify the network protection category (managed product or directory) from which the report generates.

- **Select Control Manager:** Specifies that information originates from the Control Manager server to which the user is currently logged on.

Specifying this option disables the Product Tree, because the information only comes from the Control Manager server to which the user is logged on.

- **Select Product Tree:** Specifies that information originates from the managed products the Control Manager server manages.

After specifying this option, the user must then select the protection category from which the information originates. The user does this by selecting managed products/directories from the Product Directory.



Note

Selecting the managed product/directory on this screen affects the available data views. For example, by selecting OfficeScan in the product directory only data views associated with desktop protection display in the Data Views list.

2. Click **Next**.

The **Select Data View** screen appears.

Step 2: Specify a Data View for the Query

Procedure

1. Select a data view from the **Available Data Views** list.

For more information on data views, see [Understanding Data Views on page 11-6](#).

2. Click **Next**.

The **Query Criteria** screen appears.

Step 3: Specify the Display Sequence

Specify the display and sequence for the information the query returns:

Procedure

1. Click **Change column display**.

The **Select Display Sequence** screen appears.

2. From the **Available Fields** list, select the data view columns that display when the query returns information.

Selected columns highlight.



Tip

Select the columns one at a time or use the **Shift** or **Ctrl** keys to select multiple columns.

Selecting and adding one column at a time is one method that allows users to specify the sequence which the information displays.

3. Click () to include the fields in the **Selected Fields** list.

Selected columns appear in the Selected Fields list.

4. Continue selecting and adding columns until you have all the columns you require.
5. Use the **Move Up** and **Move Down** buttons, after selecting a column in the Selected Fields list, to specify the display sequence of the information. The column at the top of the list appears as the left-most column in the returned query.
6. Click **Back**.

The **Step 3: Query Criteria** screen appears.

Step 4: Specify the Filtering Criteria

When querying for summary data (any data view with the word Summary in the title), you must specify items under **Required Criteria**.

Procedure

1. Specify the **Required Criteria**:

- Specify a Summary Time for the data or whether you want COOKIES to appear in your reports.

2. Specify the **Custom Criteria**:

a. Select **Custom criteria**.

The custom criteria options appear.

b. Specify the criteria filtering rules for the data categories from the **Match** field:

- **All of the criteria:** This selection acts as a logical “AND” function. Data appearing in the report must meet all the filtering criteria.
- **Any of the criteria:** This selection acts as a logical “OR” function. Data appearing in the report must meet any of the filtering criteria.

c. Specify the filtering criteria for the data. Control Manager supports specifying up to 20 criteria for filtering data.



Note

If you do not specify any filtering criteria, the Ad Hoc Query returns all results for the applicable columns. Trend Micro recommends specifying filtering criteria to simplify data analysis after the information for the query returns.

- i. From the left-most drop-down list, select the column to filter.
- ii. From the middle drop-down list, select the matching condition for the filter.

- iii. In the right-most field, provide the filter criteria. A list box or text box appears here depending on the column selected to filter.
 - iv. Click the **+** icon to add another filter criterion for the data view.
-

Step 5: Save and Complete the Query

Procedure

1. Click **Save this query to the saved Ad Hoc Queries list** under **Save Query Settings** to save the Ad Hoc Query.
2. Specify an Ad Hoc Query name in the **Query Name** field.



Note

Control Manager supports sharing saved Ad Hoc Queries with other users. Saved queries appear on the **Saved Ad Hoc Queries** screen.

3. Click **Query**.

The **Ad Hoc Query Results** screen appears displaying the results of the query.

Step 6: Export the Query Results to CSV or XML

Procedure

1. A **File Download** dialog box appears after clicking one of the following:
 - **Export to CSV**: Exports the query results to CSV format.
 - **Export to XML**: Exports the query results to XML format.
2. Complete one of the following:
 - Click **Open** to view the query results immediately in CSV or XML format.

- Click **Save**. A **Save As** dialog box appears. Specify the location to save the file.
-

Sharing Saved Ad Hoc Queries

Control Manager supports sharing saved Ad Hoc Queries from the **My Queries** tab of the **Saved Ad Hoc Queries** screen.

Procedure

1. Navigate to **Logs > Saved Ad Hoc Queries**.

The **Saved Ad Hoc Queries** screen appears.

2. Click the check box for the associated Ad Hoc Query to share.

3. Click **Share**.

An icon appears in the **Shared** column for the saved Ad Hoc Query.

Working With Shared Ad Hoc Queries

After creating an Ad Hoc Query, a user can share the query with other users. All shared queries from all users appear on the Available Queries tab of the **Saved Ad Hoc Queries** screen. Users can view and export shared queries.

Procedure

1. Navigate to **Logs > Saved Ad Hoc Queries**.

The **Saved Ad Hoc Queries** screen appears.

2. Click the **Available Queries** tab.

3. Use the queries to view information or to export shared queries.
-

Deleting Logs

Use the **Log Maintenance** screen to immediately delete logs or to configure automatic log deletion for the following log types:

- Virus/Spyware/Grayware logs
- Product event logs
- Security logs
- Web security logs
- Network virus logs
- Endpoint logs
- Security violation logs
- Security compliance logs
- Security statistic logs
- C&C event log
- Suspicious virus logs
- Network reputation logs
- Desktop spyware/grayware logs
- Firewall violation logs
- Behavior monitoring logs
- Access logs
- Server event logs
- Threat Migration logs
- Data Loss Prevention logs
- Data Discovery Data Loss Prevention (DLP) log



Note

Trend Micro recommends backing up Data Loss Prevention logs to Security Information and Event Management (SIEM) and keep them for at least 2 years.

Procedure

1. Navigate to **Logs > Log Maintenance**.

The **Log Maintenance** screen appears.

2. Select the corresponding check box for the logs you want to delete.
 3. Click **Delete All** in the corresponding row for logs you want to remove.
-

Configuring Automatic Log Deletion Settings

The **Log Maintenance** screen provides two methods for deleting logs automatically:


- By number of logs (minimum: 30,000, maximum: 1,000,000, default: 1,000,000)
- By the age of logs (minimum: 1 day, maximum: 360 days, default: 90 days)

Purge offset specifies the number of logs Control Manager deletes when the number of logs for a log type reaches the maximum. The default purge setting is 1000 for all log types.

Procedure

1. Navigate to **Logs > Log Maintenance**.

The **Log Maintenance** screen appears.

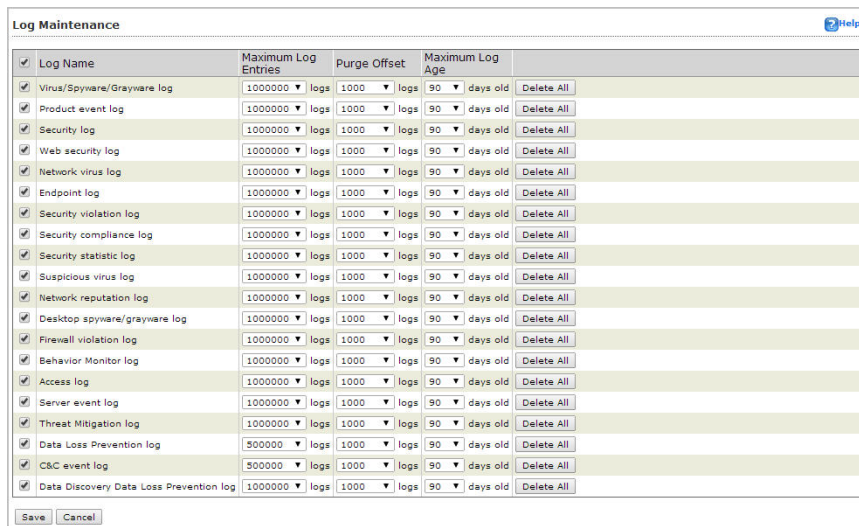

The screenshot shows the 'Log Maintenance' screen with a table of log types. Each row has a checkbox, a log name, and three columns for configuration: Maximum Log Entries, Purge Offset, and Maximum Log Age. A 'Delete All' button is present for each log type. At the bottom, there are 'Save' and 'Cancel' buttons.

☒	Log Name	Maximum Log Entries	Purge Offset	Maximum Log Age	
☒	Virus/Spyware/Grayware log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Product event log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Security log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Web security log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Network virus log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Endpoint log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Security violation log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Security compliance log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Security statistic log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Suspicious virus log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Network reputation log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Desktop spyware/grayware log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Firewall violation log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Behavior Monitor log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Access log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Server event log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Threat Mitigation log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Data Loss Prevention log	500000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	C&C event log	500000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All
☒	Data Discovery Data Loss Prevention log	1000000 ▼ logs	1000 ▼ logs	90 ▼ days old	Delete All

Save Cancel

2. Select the corresponding check box for the logs for which you want to configure settings.
3. Specify the maximum number of logs that Control Manager retains in the **Maximum Log Entries** column.

4. In **Purge Offset**, specify the number of logs Control Manager removes when the number of logs reaches the number specified in the **Maximum Log Entries** column.
 5. In **Maximum Log Age**, specify the age of logs that Control Manager deletes automatically.
 6. Click **Save**.
-

Chapter 12

Working with Reports

Generate reports using the log data collected from all managed products registered to Control Manager.

This chapter contains the following topics:

- *Understanding Reports on page 12-2*
- *Understanding Control Manager Report Templates on page 12-2*
- *Adding Custom Templates on page 12-15*
- *Understanding One-time Reports on page 12-30*
- *Understanding Scheduled Reports on page 12-36*
- *Viewing Generated Reports on page 12-43*
- *Configuring Report Maintenance on page 12-44*
- *Understanding My Reports on page 12-45*

Understanding Reports

Control Manager reports consist of two parts: report templates and report profiles. Where a report template determines the look and feel of the report, the report profile specifies the origin of the report data, the schedule/time period, and the recipients of the report.

Control Manager 5.0 introduced radical changes over previous Control Manager versions by introducing customized reports for Control Manager administrators. Control Manager 6.0 Service Pack 1 continues to support report templates from previous Control Manager versions, however Control Manager 6.0 Service Pack 1 allows administrators to design their own custom report templates.

Understanding Control Manager Report Templates

A report template outlines the look and feel of Control Manager reports. Control Manager categorizes report templates according to the following types:

- Custom templates: User-defined customized report templates that use direct database queries (database views) and report template elements (charts and tables). Users have greater flexibility specifying the data that appears in their reports compared to report templates from previous Control Manager versions. For more information on Custom templates, see [Understanding Custom Templates on page 12-3](#).



Note

Default customized report templates do not support generating PDFs in landscape format. Use the portrait format for default templates or make a new template using the landscape format.

- Static templates: Includes pre-defined templates. For more information on Static templates, see [Understanding Static Templates on page 12-9](#).

Understanding Custom Templates

Custom templates use database views as the information foundation for reports. For more information on data views, see [Understanding Data Views on page 11-6](#). The look and feel of generated reports falls to the report elements. Report elements consist of the following.

TABLE 12-1. Custom Template Elements

TEMPLATE ELEMENT	DESCRIPTION
Page break	Inserts a page break for a report. Each report page supports up to three report template elements.
Static text	Provides a user-defined description or explanation for the report. Static text content can contain up to 4096 characters.
Bar chart	Inserts a bar chart into a report template.
Line chart	Inserts a line graph into a report template.
Pie chart	Inserts a pie chart into a report template.
Dynamic table	Inserts a dynamic table/pivot table into a report template.
Grid table	Inserts a table into a report template. The information in a grid table will be the same as the information that displays in an Ad Hoc Query.

Each Custom template can contain up to 100 report template elements. Each page in the report template can contain up to three report template elements. Use page breaks to create report template pages.

To better understand Custom templates, Trend Micro provides the following pre-defined report templates.



Note

Access the **Report Templates** screen to view the Trend Micro pre-defined templates.

TABLE 12-2. Pre-defined Custom Templates

TEMPLATE	DESCRIPTION
TM-Content Violation Detection Summary	Provides the following information: • Content Violation Detection Grouped by Day (Line chart) • Policy in Violation Count Grouped by Day (Line chart) • Sender/Users in Violation Count Grouped by Day (Line chart) • Recipient Count Grouped by Day (Line chart) • Top 25 Policies in Violation (Bar chart) • Content Violation Policy Summary (Grid table) • Top 25 Senders/Users in Violation (Bar chart) • Content Violation Senders/Users in Violation Summary (Grid table) • Action Result Summary (Pie chart)
TM-Managed Product Connection/ Component Status	Provides the following information: • Server/Appliance Connection Status (Pie chart) • Client Connection Status (Pie chart) • Server/Appliance Pattern File/Rule Update Status (Pie chart) • Client Pattern File/Rule Update Status (Pie chart) • Server/Appliance Scan Engine Update Status (Pie chart) • Client Scan Engine Update Status (Pie chart) • Pattern File/Rule Summary for Servers/Appliances (Grid table) • Pattern File/Rule Summary for Clients (Grid table) • Scan Engine Summary for Servers/Appliances (Grid table) • Scan Engine Summary for Clients (Grid table)

TEMPLATE	DESCRIPTION
TM-Overall Threat Summary	Provides the following information: • Complete Network Security Risk Analysis Summary (Grid table) • Network Protection Boundary Summary (Grid table) • Security Risk Entry Point Analysis Information (Grid table) • Security Risk Destination Analysis Information (Grid table) • Security Risk Source Analysis Information (Grid table)
TM-Spam Detection Summary	Provides the following information: • Spam Detection Grouped by Day (Line chart) • Recipient Domain Count Grouped by Day (Line chart) • Recipient Count Grouped by Day (Line chart) • Top 25 Recipient Domains (Bar chart) • Overall Spam Violation Summary (Grid table) • Top 25 Spam Recipients (Bar chart) • Spam Recipient Summary (Grid table)

TEMPLATE	DESCRIPTION
TM-Spyware/ Grayware Detection Summary	Provides the following information: • Spyware/Grayware Detection Grouped by Day (Line chart) • Unique Spyware/Grayware Count Grouped by Day (Line chart) • Spyware/Grayware Source Count Grouped by Day (Line chart) • Spyware/Grayware Destination Count Grouped by Day (Line chart) • Top 25 Spyware/Grayware (Bar chart) • Overall Spyware/Grayware Summary (Grid table) • Top 25 Spyware/Grayware Sources (Bar chart) • Spyware/Grayware Source Summary (Grid table) • Top 25 Spyware/Grayware Destinations (Bar chart) • Spyware/Grayware Destination Summary (Grid table) • Action Result Summary (Pie Chart) • Spyware/Grayware Action/Result Summary (Grid table)

TEMPLATE	DESCRIPTION
TM-Suspicious Threat Detection Summary	Provides the following information: • Suspicious Threat Detection Grouped by Day (Line chart) • Rule in Violation Count Grouped by Day (Line chart) • Sender Count Grouped by Day (Line chart) • Recipient Count Grouped by Day (Line chart) • Source IP Address Count Grouped by Day (Line chart) • Destination IP Address Count Grouped by Day (Line chart) • Top 25 Senders (Bar chart) • Top 25 Recipients (Bar chart) • Suspicious Threat Sender Summary (Grid table) • Suspicious Threat Riskiest Recipient Summary (Grid table) • Top 25 Source IP Addresses (Bar chart) • Top 25 Destination IP Addresses (Bar chart) • Suspicious Threat Source Summary (Grid table) • Suspicious Threat Riskiest Destination Summary (Grid table) • Top 25 Protocol Names (Bar chart) • Suspicious Threat Protocol Detection Summary (Grid table) • Overall Suspicious Threat Summary (Grid table)

TEMPLATE	DESCRIPTION
TM-Virus/Malware Detection Summary	Provides the following information: • Virus/Malware Detection Grouped by Day (Line chart) • Unique Virus/Malware Count Grouped by Day (Line chart) • Infection Destination Count Grouped by Day (Line chart) • Top 25 Virus/Malware (Bar chart) • Overall Virus/Malware Summary (Grid table) • Top 25 Infection Sources (Bar chart) • Virus/Malware Infection Source Summary (Grid table) • Top 25 Infection Destinations (Bar chart) • Virus/Malware Infection Destination Summary (Grid table) • Action Result Summary (Pie chart) • Virus/Malware Action/Result Summary (Grid table)
TM-Web Violation Detection Summary	Provides the following information: • Web Violation Detection Grouped by Day (Line chart) • Policy in Violation Count Grouped by Day (Line chart) • Client in Violation Count Grouped by Day (Line chart) • URL in Violation Count Grouped by Day (Line chart) • Top 25 Policies in Violation (Bar chart) • Overall Web Violation Summary (Grid table) • Top 25 Clients in Violation (Bar chart) • Web Violation Client IP Address Summary (Grid table) • Top 25 URLs in Violation (Bar chart) • Web Violation URL Summary (Grid table) • Filter/Blocking Type Summary (Pie chart)

Understanding Static Templates

Control Manager added 91 pre-generated report templates divided into seven categories: Executive Summary, Gateway, Mail Server, Server, Desktop, Network Products, Data Loss Prevention and Data Discovery.



Note

In Control Manager 3.5, spyware/grayware were no longer considered viruses. This change affects the virus count in all original virus-related reports.

It may take a few seconds to generate a report, depending on its contents. As soon as Control Manager finishes generating a report, the screen refreshes and the **View** link adjacent to the report becomes available.

Use the Report Category list on the Control Manager screen to peruse the six categories of reports listed below:

TABLE 12-3. Executive Summary Reports and Report Types

EXECUTIVE SUMMARY REPORTS	REPORT TYPES
Spyware/Grayware Detection Reports	• Spyware/Grayware detected • Most commonly detected Spyware/Grayware (10, 25, 50, 100) • Detected Spyware/Grayware list for all entities
Virus Detection Reports	• Viruses detected • Most commonly detected viruses (10, 25, 50, 100) • Virus infection list for all entities
Comparative Reports	• Spyware/Grayware, grouped by (Day, Week, Month) • Viruses, grouped by (Day, Week, Month) • Damage cleanups, grouped by (Day, Week, Month) • Spam, grouped by (Day, Week, Month)

EXECUTIVE SUMMARY REPORTS	REPORT TYPES
Vulnerability Reports	- Machine risk level assessment - Vulnerability assessment - Most commonly cleaned infections (10, 25, 50, 100) - Worst damage potential vulnerabilities (10, 25, 50, 100) - Vulnerabilities ranked by risk level

TABLE 12-4. Gateway Product Reports and Report Types

GATEWAY PRODUCT REPORTS	REPORT TYPES
Spyware/Grayware Detection Reports	- Spyware/Grayware detected - Most commonly detected Spyware/Grayware (10, 25, 50, 100)
Virus Detection Reports	- Viruses detected - Most commonly detected viruses (10, 25, 50, 100)
Comparative Reports	- Spyware/Grayware, grouped by (Day, Week, Month) - Spam, grouped by (Day, Week, Month) - Viruses, grouped by (Day, Week, Month)
Deployment Rate Reports	- Detailed summary - Basic summary - Detailed failure rate summary - OPS deployment rate for IMSS

TABLE 12-5. Mail Server Product Reports and Report Types

MAIL SERVER PRODUCT REPORTS	REPORT TYPES
Spyware/Grayware Detection Reports	• Spyware/Grayware detected • Most commonly detected Spyware/Grayware (10, 25, 50, 100)
Virus Detection Reports	• Viruses detected • Top senders of infected email (10, 25, 50, 100) • Most commonly detected viruses (10, 25, 50, 100)
Comparative Reports	• Spyware/Grayware, grouped by (Day, Week, Month) • Viruses, grouped by (Day, Week, Month)
Deployment Rate Reports	• Detailed summary • Basic summary • Detailed failure rate summary

TABLE 12-6. Server Based Product Reports and Report Types

SERVER BASED PRODUCT REPORTS	REPORT TYPES
Spyware/Grayware Detection Reports	• Spyware/Grayware detected • Most commonly detected Spyware/Grayware (10, 25, 50, 100)
Virus Detection Reports	• Viruses detected • Most commonly detected viruses (10, 25, 50, 100)
Comparative Reports	• Spyware/Grayware, grouped by (Day, Week, Month) • Viruses, grouped by (Day, Week, Month)
Deployment Rate Reports	• Detailed summary • Basic summary • Detailed failure rate summary

TABLE 12-7. Desktop Product Reports and Report Types

DESKTOP PRODUCT REPORTS	REPORT TYPES
Spyware/Grayware Detection Reports	The data in this report type contains both computer and mobile device detections. • Spyware/Grayware detected • Most commonly detected Spyware/Grayware (10,25,50,100)
Virus Detection Reports	The data in this report type contains both computer and mobile device detections. • Viruses detected • Most commonly detected viruses (10,25,50,100)
OfficeScan Client Information Reports	• Detailed summary • Basic summary
OfficeScan Product Registration Report	Registration status
Comparative Reports	The data in this report type contains both computer and mobile device detections. • Spyware/Grayware, grouped by (Day, Week, Month) • Viruses, grouped by (Day, Week, Month)
OfficeScan Server Deployment Reports	• Detailed summary • Basic summary • Detailed failure rates summary
OfficeScan Damage Cleanup Services Reports	• Detailed summary • Most commonly cleaned infections (10, 25, 50, 100)

TABLE 12-8. Network Product Reports and Report Types

NETWORK PRODUCT REPORTS	REPORT TYPES
Network VirusWall Reports	• Policy violation report, grouped by (Day, Week, Month) • Most commonly detected violative clients (10, 25, 50, 100) • Service violation report, grouped by (Day, Week, Month)
Trend Micro Total Discovery Appliance Reports	• Incident summary report, grouped by (Day, Week, Month) • High risk clients (10, 25, 50, 100) • Summary of known and unknown risks report

TABLE 12-9. Data Loss Prevention Reports and Report Types

DATA LOSS PREVENTION REPORTS	REPORT TYPES
Top DLP Incident Sources	• Incidents by sender (10, 20, 30, 40, 50) • Incidents by host name (10, 20, 30, 40, 50) • Incidents by recipient (10, 20, 30, 40, 50) • Incidents by source IP address (10, 20, 30, 40, 50) • Incidents by URL (10, 20, 30, 40, 50) • Incidents by User (10, 20, 30, 40, 50) • Top template matches (10, 20, 30, 40, 50) • Incident distribution by channel • Incident trend, grouped by (Day, Week, Month) • Incidents by channel, grouped by (Day, Week, Month)

DATA LOSS PREVENTION REPORTS	REPORT TYPES
Significant Incident Increase	- Significant incident increase (%) by channel (10, 20, 30, 40, 50) - Significant incident increase by channel (10, 20, 30, 40, 50) - Significant incident increase (%) by sender (10, 20, 30, 40, 50) - Significant incident increase by sender (10, 20, 30, 40, 50) - Significant incident increase (%) by hostname (10, 20, 30, 40, 50) - Significant incident increase by hostname (10, 20, 30, 40, 50) - Significant incident increase (%) by user (10, 20, 30, 40, 50) - Significant incident increase by user (10, 20, 30, 40, 50) - Significant incident increase (%) by source IP address (10, 20, 30, 40, 50) - Significant incident increase by source IP address (10, 20, 30, 40, 50) - Significant incident increase (%) by template (10, 20, 30, 40, 50) - Significant incident increase by template (10, 20, 30, 40, 50)

TABLE 12-10. Data Discovery Reports and Report Types

DATA DISCOVERY REPORTS	REPORT TYPES
Top Data Discovery Detection Sources	- Top endpoints with sensitive files (3, 5, 10) - Top Data Discovery template matches (3, 5, 10) - Top sensitive file policy detections (3, 5, 10) - Top sensitive files (3, 5, 10)

Adding Custom Templates

Custom templates allow greater flexibility for report generation than previous versions of Control Manager templates. Custom templates directly access the Control Manager database, providing users the opportunity to create reports based on any information the Control Manager database contains.

Adding a Custom template requires the following steps:

Procedure

1. *Step 1: Access the Add Report Template Screen and Name the Template on page 12-15*
 2. *Step 2: Specify the Template Component to Add to the Report Template on page 12-17*
 3. *Step 3: Specify the Data View for the Template on page 12-17*
 4. *Step 4: Specify the Query Criteria for the Template on page 12-19*
 5. *Step 5: Specify the Data to Appear in the Report and the Order in Which the Data Appears on page 12-19*
 6. *Step 6: Complete Report Template Creation on page 12-29*
-

Step 1: Access the Add Report Template Screen and Name the Template

Procedure

1. Navigate to **Reports > Custom Templates**.

Step 2: Specify the Template Component to Add to the Report Template

Procedure

1. Drag a report template element from the Working Panel to the report template:
 - **Static Text:** Text a user inserts into the template. This could be a summary of the information that the report presents.
 - **Pie Chart:** Report data displays in a pie chart
 - **Bar Chart:** Report data displays in a bar chart
 - **Dynamic Table:** Report data displays in a table similar to a pivot table
 - **Line Chart:** Report data displays in a line chart
 - **Grid Table:** Report data displays in a table like an Ad Hoc Query table
 2. Add multiple components to make the report comprehensive.

You can add up to three components per page and 100 report components to a report template.
 3. Add page breaks and rows to the report template to separate data or report template elements.
-

Step 3: Specify the Data View for the Template

Procedure

1. Click **Edit** on a report template element.

The **Edit <Report Template Element> Step 1: Data View** screen appears.

**Note**

For every component except Static text, the **Edit <Report Template Element> Step 1: Data View** screen appears. The **Edit** link in Static Text opens the **Edit Static Text** screen.

Edit Bar Chart Help

Step 1: Data View >>> Step 2 >>> Step 3

Data Views

Select the data view:

- Product Information
- Security Threat Information
- Data Protection Information

An asterisk () indicates all report data containing Control Manager-specific and License-specific information, generates using data from YUNIAEST.

Next > Cancel

2. Select the data to query from the **Data Views** area.

For more information on Data Views, see [Understanding Data Views on page 11-6](#).

3. Click **Next**.

The **Step 2: Set Query Criteria** screen appears.

Query Criteria Help

Step 1 >>> Step 2: Set Query Criteria >>> Step 3

Result Display Settings

Selected View: Engine Status Change column display

Criteria Settings

☒ Required criteria

☒ Custom criteria

Match: All of the criteria

Note: Columns marked with asterisk (*) can be selected to filter data only once.

Connection Status is equal to Abnormal (Network communication issues)

< Back Next > Cancel

Step 4: Specify the Query Criteria for the Template



Note

If you do not specify any filtering criteria, the report returns all results for the applicable columns. Trend Micro recommends specifying filtering criteria to simplify data analysis after the information for the report returns.

Procedure

1. Select **Custom criteria**.
2. Specify the criteria filtering rules for the data categories:
 - **All of the criteria:** This selection acts as a logical “AND” function. Data appearing in the report must meet all the filtering criteria.
 - **Any of the criteria:** This selection acts as a logical “OR” function. Data appearing in the report must meet any of the filtering criteria.
3. Specify the data, the operator, and the specific criteria to filter. Control Manager supports specifying up to 20 criteria for filtering data.

Step 5: Specify the Data to Appear in the Report and the Order in Which the Data Appears

Depending on the selection for the report element, specify the data to display in reports:

- Bar chart
- Pie chart
- Dynamic table
- Grid table
- Line chart

Configuring Bar Chart Settings

Procedure

1. Click **Next**.

The **Step 3: Specify Design** screen appears.

Edit Bar Chart Help

Drag and drop the fields in the Available Field area to the Data Field, Series Field, or Category Field areas to create your report template.

Step 1 >>> Step 2 >>> **Step 3 : Specify Design**

Name "":

Data Field

Drop Data Field Here

Category Field

Drop Category Field Here

Series Field

Drop Series Field Here

Drag Available Fields

- Product Entity/Endpoint
- Product Host/Endpoint
- Product/Endpoint IP
- Connection Status
- Product
- Product Version
- Product Role
- Engine
- Engine Version
- Engine Status
- Engine Updated

2. Type a name for the bar chart in the **Name** field.
3. Drag items from the **Drag Available Fields** list to the following areas:
 - **Data Field:** Specifies the data that appears along the vertical axis of the bar chart
 - **Series Field:** Specifies additional data that can appear along the horizontal axis
 - **Category Field:** Specifies the data that appears along the horizontal axis of the bar chart
4. Specify the Data Properties for the Data Field:
 - a. Type a meaningful label in the **Value label** field.
 - b. Specify how the data displays for **Data Field** from the Aggregated by list:

- **Total number of instances:** Specifies that the total count for the number of incidents is used for the results
- **Number of unique instances:** Specifies that only the count for distinct items is used for the results
- **Sum of value:** Specifies that the sum of all the values in the "Count" of a Data View column is used for the results

Example: OfficeScan detects 10 virus instances of the same virus on one computer. The **Count number of row** displays 10, while Count distinct row displays 1.

5. Specify the Category Properties for the **Category Field**:

- Type a meaningful name in the **Label name** field.
- Specify how to sort the data in the chart from the Sorting lists:
 - **Aggregation value:** Sorts the data according to the data values.
 - **Category name:** Sorts the data according to the alphabetic order of the category names.
 - **Ascending:** Sorts the data in ascending order.
 - **Descending:** Sorts the data in descending order.
- Specify how many items display in the **Category Field** by selecting **Filter summarized result** and specifying a value in the **Display top** text box.

The default value is 10.

- Select **Aggregate remaining items** to put all remaining items into the group "Other" on the graph.

6. Specify the Series Properties for the **Series Field**:

- Type a meaningful label in the **Label name** field.

7. Click **Save**.

The **Add Report Template** screen appears.

Configuring Pie Chart Settings

Procedure

1. Click **Next**.

The **Step 3: Specify Design** screen appears.

Edit Pie Chart Help

Drag and drop the fields in the Available Field area to the Data Field, Series Field, or Category Field areas to create your report template.

Step 1 >>> Step 2 >>> **Step 3 : Specify Design**

Name*:

Data Field

Drop Data Field Here

Category Field

Drop Category Field Here

Drag Available Fields

- Product Entity/Endpoint
- Product Host/Endpoint
- Product/Endpoint IP
- Connection Status
- Product
- Product Version
- Product Role
- Engine
- Engine Version
- Engine Status
- Engine Updated

2. Type a name for the pie chart in the **Name** field.
3. Drag items from the **Drag Available Fields** list to the following areas:
 - **Data Field:** Specifies the total count for data appearing in the chart
 - **Category Field:** Specifies how the data is separated in the chart

Example: To provide a graph that displays virus distribution across your network Data Fields would represent the total number of viruses in your network. Category Fields would represent how the total number of viruses would be broken down as a percentage.

4. Specify the Data Properties for the **Data Field**.
 - a. Specify how the data displays for the **Data Field** from the Aggregated by list:
 - **Total number of instances:** Specifies that the total count for the number of incidents is used for the results

- **Number of unique instances:** Specifies that only the count for distinct items is used for the results
- **Sum of value:** Specifies that the sum of all the values in the “Count” of a Data View column is used for the results

Example: OfficeScan detects 10 virus instances of the same virus on one computer. The Count number of row would display 10, while Count distinct row displays 1.

5. Specify the Category Properties for the **Category Field**:

- Type a meaningful label in the **Label name** field.
- Specify how to sort the data in the chart from the Sorting list:
 - **Aggregation value:** Sorts the data according to the data values.
 - **Category name:** Sorts the data according to the alphabetic order of the category names.
 - **Ascending:** Sorts the data in ascending order.
 - **Descending:** Sorts the data in descending order.
- Specify how many items display in the **Category Field** by selecting **Filter summarized result** and specifying a value in the **Display top** text box.

The default value is 10.

- Select **Aggregate remaining items** to put all remaining items into the group “Other” on the graph.

6. Click **Save**.

The **Add Report Template** screen appears.

Configuring Dynamic Table Settings

Procedure

- Click **Next**.

The **Step 3: Specify Design** screen appears.

Edit Dynamic Table Help

Drag and drop the fields in the Available Field area to the Data Field, Series Field, or Category Field areas to create your report template.

Step 1 >>> Step 2 >>> **Step 3 : Specify Design**

Name:

Row Fields

Drop Row Field Here

Column Field

Drop Column Field Here

Drag Available Fields

- Product Entity/Endpoint
- Product Host/Endpoint
- Product/Endpoint IP
- Connection Status
- Product
- Product Version
- Product Role
- Engine
- Engine Version
- Engine Status
- Engine Updated

Data Field

Drop Data Field Here

2. Type a name for the table in the **Name** field.
3. Drag items from the **Drag Available Fields** list to the following areas:
 - **Data Field:** Specifies the total count for data appearing in the table
 - **Row Fields:** Specifies how the data is separated horizontally in the table
 - **Column Field:** Specifies how the data is separated vertically in the table

Example: Olivia selects the Data View "Detailed Virus/Malware Information". She does not specify any filtering criteria. She wants a table that displays infected clients, the viruses infecting the clients, and the action taken against the viruses by the managed product. Olivia drags the following fields to the Data, Row, and Column Fields:

- **Data Field:** Detections
 - **Row Fields:** Virus/Malware and Action
 - **Column Field:** Host
4. Specify the Data Properties for the **Data Field**:
 - a. Type a name for the **Data field title**.
 - b. Specify how the data displays for the **Data Field** from the Aggregated by list:

- **Total number of instances:** Specifies that the total count for the number of incidents is used for the results
- **Number of unique instances:** Specifies that only the count for distinct items is used for the results
- **Sum of value:** Specifies that the sum of all the values in the “Count” of a Data View column is used for the results

Example: OfficeScan detects 10 virus instances of the same virus on one computer. The Count number of row would display 10, while Count distinct row displays 1.

5. Specify the Row Properties for the Row Fields.

- Type a name for the **Row header title**.
- Specify how to sort the data in the table from the Sorting list:
 - **Aggregation value:** Sorts the data according to the data values.
 - **Header title:** Sorts the data according to the alphabetic order of the header names.
 - **Ascending:** Sorts the data in ascending order.
 - **Descending:** Sorts the data in descending order.
- Specify how many items display in the **Row Fields** by selecting **Filter summarized result** and specifying a value in the **Display top** text box.

The default value is 10.

- Select **Aggregate remaining items** to put all remaining items into the group “Other” on the graph.

6. Specify the Column Properties for the **Column Field**.

- Type a name for the **Column header title**.
- Specify how to sort the data in the table from the Sorting list:
 - **Aggregation value:** Sorts the data according to the data values.

- **Header title:** Sorts the data according to the alphabetic order of the header names.
 - **Ascending:** Sorts the data in ascending order.
 - **Descending:** Sorts the data in descending order.
- c. Specify how many columns display by selecting **Filter column** and specifying a value in the **Display top** text box.

The default value is 10.

- d. Select **Aggregate remaining items** to put all remaining items into the group “Other” on the graph.

7. Click **Save**.

The **Add Report Template** screen appears.

Configuring Line Chart Settings

Procedure

1. Click **Next**.

The **Step 3: Specify Design** screen appears.

Edit Line Chart Help

Drag and drop the fields in the Available Field area to the Data Field, Series Field, or Category Field areas to create your report template.

Step 1 >>> Step 2 >>> **Step 3 : Specify Design**

Name*:

Data Field

Drop Data Field Here

Category Field

Drop Category Field Here

Series Field

Drop Series Field Here

Drag Available Fields

- Product Entity/Endpoint
- Product Host/Endpoint
- Product/Endpoint IP
- Connection Status
- Product
- Product Version
- Product Role
- Engine
- Engine Version
- Engine Status
- Engine Updated

2. Type a name for the line chart in the **Name** field.
3. Drag items from the **Drag Available Fields** list to the following areas:
 - **Data Field:** Specifies the total count for data appearing in the table
 - **Series Field:** Specifies how the data is separated in the chart along the vertical axis
 - **Category Field:** Specifies how the data is separated in the chart along the horizontal axis

Example: Olivia selects the Data View "Detailed Virus/Malware Information". She does not specify any filtering criteria. She wants a chart that displays virus infections over time. Olivia drags the following fields to the Data, Series, and Category Fields:

- **Data Field:** Detections
 - **Category Field:** Generated
 - **Series Field:** Virus/Malware
4. Specify the Data Properties for the **Data Field**.
 - a. Type a meaningful label in the **Value label** field.
 - b. Specify how the data displays for **Data Field** from the Aggregated by list:
 - **Total number of instances:** Specifies that the total count for the number of incidents is used for the results
 - **Number of unique instances:** Specifies that only the count for distinct items is used for the results
 - **Sum of value:** Specifies that the sum of all the values in the "Count" of a Data View column is used for the results

Example: OfficeScan detects 10 virus instances of the same virus on one computer. The Count number of row would display 10, while Count distinct row displays 1.

5. Specify the Category Properties for the **Category Field**.
 - a. Type a meaningful label in the **Label name** field.

- b. Specify how to sort the data in the chart from the Sorting list:
 - **Aggregation value:** Sorts the data according to the data values.
 - **Category name:** Sorts the data according to the alphabetic order of the category names.
 - **Ascending:** Sorts the data in ascending order.
 - **Descending:** Sorts the data in descending order.
 - c. Specify how many items display in the **Category Field** by selecting **Filter summarized result** and specifying a value in the **Display top** text box.

The default value is 10.
 - d. Select **Aggregate remaining items** to put all remaining items into the group “Other” on the graph.
6. Specify the Series Properties for the **Series Field**:
 - a. Type a meaningful label in the **Label name** field.
 7. Click **Save**.

The **Add Report Template** screen appears.

Configuring Grid Table Settings

Procedure

1. Click **Next**.

The **Step 3: Specify Design** screen appears.

Edit Grid Table Help

Step 1 >>> Step 2 >>> **Step 3 : Specify Design**

Name*:

Select fields to display on the report:

Available Fields

Selected Fields

Product Entity/Endpoint
 Product Host/Endpoint
 Product Endpoint IP
 Connection Status
 Product
 Product Version
 Product Role
 Engine
 Engine Version
 Engine Status
 Engine Updated

Move Up

Move Down

Sorting : Select a field Descending

Display quantity : 25

< Back
Save
Cancel

2. Type a name for the table in the **Name** field.
3. Specify which columns appear in the table and in which order the columns appear.
4. Specify how the columns sort.
5. Specify the number of items that appear in the table.
6. Click **Save**.

The **Add Report Template** screen appears.

Step 6: Complete Report Template Creation

Procedure

1. Add or remove Report Template Elements as you require.
2. Click **Save**.

Understanding One-time Reports

One-time reports generate on demand. Creating one-time reports provides an effective way for administrator's to create management type reports for their network's during outbreaks.

The One-time Report table contains the following:

TABLE 12-11. One-time Reports List

ITEM	DESCRIPTION
Name	Displays the name of the report.
Description	Displays the user-defined description for the report.
Period	Displays the time and date range for the report.
Created time	Displays when the report was created.
Generated time	Displays when the report generated.
Format	Displays the format that the report generates (Example: PDF, HTML, XML, CSV).
Size	Displays the size of reports.
View	Click the associated View link to view the report.

Adding One-time Reports

Control Manager supports generating one-time reports from Static and Custom report templates. Users need to create Custom report templates, while Trend Micro provided the Static report templates. The process for creating a one-time report is similar for all report types and involves the following:

Procedure

1. *Step 1: Access the Add One-time Report Screen and Select the Report Type on page 12-31*
2. *Step 2: Specify the Product/ Products From Which the Report Data Generates on page 12-33*

3. *Step 3: Specify the Date That the Product/Products Produced the Data on page 12-34*
4. *Step 4: Specify the Recipient of the Report: on page 12-35*

Step 1: Access the Add One-time Report Screen and Select the Report Type

Procedure

1. Navigate to **Reports > One-time Reports**.

The **One-time Reports** screen appears.

One-time Reports

Refresh Help

0-0 of 0 H 4 Page 0 of 0 H

Name	Description	Period	Created time	Generated time	Format	Size	View
0-0 of 0 H 4 Page 0 of 0 H							

Rows per page: 10

2. Click **Add**.

The **Add One-time Report > Step 1: Contents** screen appears.

Add One-Time Report

Help

Step 1: Contents >>> Step 2 >>> Step 3 >>> Step 4

Report Details

Name*:

Description:

Report Content

Custom Templates

Static Templates

- ☐ TM-Content Violation Detection Summary
- ☐ TM-Managed Product Connection/Component Status
- ☐ TM-Overall Threat Summary
- ☐ TM-Spam Detection Summary
- ☐ TM-Spyware/Grayware Detection Summary
- ☐ TM-Suspicious Threat Detection Summary
- ☐ TM-Virus/Malware Detection Summary
- ☐ TM-Web Violation Detection Summary

3. Type a name for the report in the **Name** field, under Report Details.
4. Type a description for the report in the **Description** field, under Report Details.
5. Select the Control Manager template to generate the report:
 - **Custom templates:** Select the Custom report template to generate the report. If the existing reports do not fulfill your requirements, create one from the **Report Templates** screen. See [Adding Custom Templates on page 12-15](#) for more information.
 - **Static templates:**
 - a. Click **Static Templates** under **Report Content**. The Static templates appear in the work area to the right, under **Report Content**.
 - b. Select the report category on which to base the report.
 - c. Select the static template data on which to base the template.
6. Select the report generation format:
 - **Custom template** report formats:
 - **Adobe PDF Format (*.pdf)**
 - **HTML Format (*.html)**
 - **XML Format (*.xml)**
 - **CSV Format (*.csv)**
 - **Static template** report formats:
 - **Rich Text Format (*.rtf)**
 - **Adobe PDF Format (*.pdf)**
 - **ActiveX**
 - **Crystal Report Format (*.rpt)**
7. Click **Next**.

The **Add One-Time Report > Step 2: Targets** screen appears.

Add One-Time Report Help

Step 1 >>> **Step 2: Targets** >>> Step 3 >>> Step 4

Targets

Choose the managed product or managed product folder that will be the focus of the report.

Note: All report data containing Control Manager-specific and License-specific information, generates using data from YUNATEST. Selecting the Cascading Folder will not generate reports using the child Control Manager-specific data.

Select multiple managed products or folders.

- ☐ Cascading Folder
- ☐ Local Folder

< Back Next > Cancel

Step 2: Specify the Product/Products From Which the Report Data Generates

Procedure

1. Select the managed product or directory from which Control Manager gathers the report information.
2. If the report contains data from a Network VirusWall Enforcer device, specify the clients from which the reports generate:
 - **All clients:** Reports generate from all Network VirusWall Enforcer devices
 - **IP range:** Reports generate from a specific IP address range
 - **Segment:** Reports generate from a specific network segment
3. Click **Next**.

The **Add One-Time Report > Step 3: Time Period** screen appears.

Add One-Time Report [Help](#)

Step 1 >>> Step 2 >>> **Step 3: Time Period** >>> Step 4

Time Period

☒ Last 24 hours

☐ Range

From : 04/18/2012 21:08
mm/dd/yyyy hh mm

To : 04/18/2012 21:08
mm/dd/yyyy hh mm

< Back Next > Cancel

Step 3: Specify the Date That the Product/Products Produced the Data

Procedure

1. Specify the data generation date:
 - From the drop down list select one of the following:
 - **All dates**
 - **Last 24 hours**
 - **Today**
 - **Last 7 days**
 - **Last 14 days**
 - **Last 30 days**
 - Specify a date range:
 - Type a date in the **From** field.
 - Specify a time in the accompanying **hh** and **mm** fields.
 - Type a date in the **To** field.

- Specify a time in the accompanying **hh** and **mm** fields.



Note

Click the calendar icon next to the **From** and **To** fields to use a dynamic calendar to specify the date range.

- Click **Next**.

The **Add Onetime Report > Step 4: Message Content and Recipients** screen appears.

Step 4: Specify the Recipient of the Report:

Procedure

- Type a title for the email message that contains the report in the **Subject** field.
- Type a description about the report in the **Message** field.
- Select **Email the report as an attachment** to enable sending the report to a specified recipient.
- Specify to select users or groups from the **Report Recipients** list.

5. Select the users/groups to receive the report and click the >> button.
 6. Click **Finish** after selecting all users/groups to receive the report.
-

Understanding Scheduled Reports

Scheduled reports generate based on a user-specified schedule. Creating scheduled reports provide an effective way for administrator's to create management type reports for their network's during normal operation.

The Scheduled Reports table contains the following:

TABLE 12-12. Scheduled Reports List

ITEM	DESCRIPTION
Name	Displays the name of the report
Description	Displays the user-defined description for the report
Frequency	Displays how often the report generates
Created time	Displays when the report was created
Last generated time	Displays when the latest report generated
Next schedule	Displays when to generate the next report
History	Click the associated View link to view the report
Enable	Displays the status of the report (enabled or disabled)

Adding Scheduled Reports

Control Manager supports generating scheduled reports from Custom and Static templates. Users need to create Custom Templates; Trend Micro , while Trend Micro provides Static templates. The process for creating a scheduled report is similar for all report types:

Procedure

1. *Step 1: Access the Add Scheduled Report Screen and Select the Report Type on page 12-37*
 2. *Step 2: Specify the Product/Products from Which the Report Data Generates on page 12-40*
 3. *Step 3: Specify the Date that the Product/Products Produced the Data on page 12-41*
 4. *Step 4: Specify the Recipient of the Report on page 12-42*
-

Step 1: Access the Add Scheduled Report Screen and Select the Report Type

Procedure

1. Navigate to **Reports > Scheduled Reports**.

The **Scheduled Reports** screen appears.

Scheduled Reports

Refresh Help

Add Copy Delete 0-0 of 0 H Page 0 of 0 H

☐	Name	Description	Frequency	Created time	Last generated time	Next schedule	History	Enable
☐								

Add Copy Delete 0-0 of 0 H Page 0 of 0 H

Rows per page: 10

2. Click **Add**.


The **Add Scheduled Report > Step 1: Contents** screen appears.

3. Type a name for the report in the **Name** field.
4. Type a meaningful description for the report in the **Description** field.
5. Select the Control Manager template to generate the report:
 - Custom report template:
 - a. Select the Custom Template to generate the report. If the existing reports do not fulfill your requirements, create one from the **Report Templates** screen. See [Adding Custom Templates on page 12-15](#) for more information.
 - Static report template:
 - a. Click **Static Template** under **Report Content**. The Static templates appear in the work area to the right, under **Report Content**.
 - b. Select the report category on which to base the report.
 - c. Select the Static template data on which to base the template.
6. Select the report generation format:

- Custom template report formats:
 - Adobe PDF Format (*.pdf)
 - HTML Format (*.html)
 - XML Format (*.xml)
 - CSV Format (*.csv)
- Static template report formats:
 - Rich Text Format (*.rtf)
 - Adobe PDF Format (*.pdf)
 - ActiveX
 - Crystal Report Format (*.rpt)

7. Click **Next**.

The **Add Scheduled Report > Step 2: Targets** screen appears.

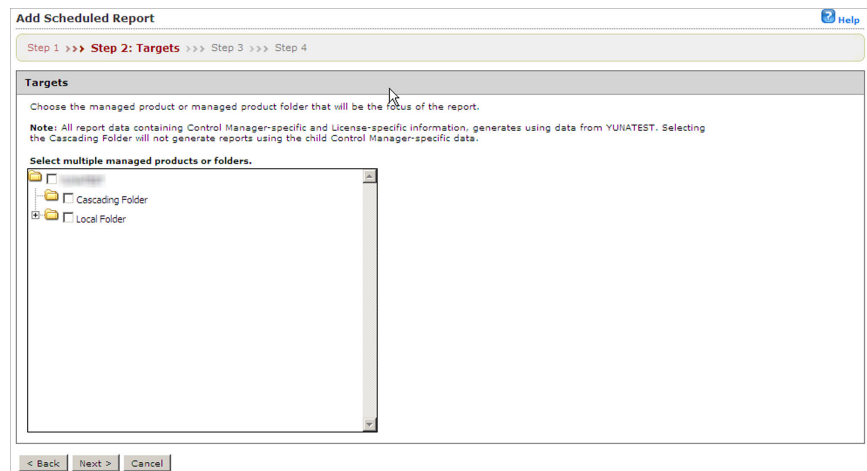

Step 2: Specify the Product/Products from Which the Report Data Generates

Procedure

1. Select the managed product or directory from which Control Manager gathers the report information.
2. If the report contains data from a Network VirusWall Enforcer device, specify the clients from which the reports generate:
 - **All clients:** Reports generate from all Network VirusWall Enforcer devices
 - **IP range:** Reports generate from a specific IP address range
 - **Segment:** Reports generate from a specific network segment
3. Click **Next**.

The **Add One-Time Report > Step 3: Frequency** screen appears.

Add Scheduled Report Help

Step 1 >>> Step 2 >>> **Step 3: Frequency** >>> Step 4

Frequency

☒ Every 'n' days: 1
☐ Weekly, on: Sunday
☐ Bi-weekly, on: Sunday
☐ Monthly, on: First day

Data range:

☒ Reports include data up to the **Start the schedule** time specified below.
☐ Reports include data up to 23:59:59 of the previous day.

Start the schedule:

☐ Immediately
☒ Start on: 03/17/2014 14:29
 mm/dd/yyyy hh mm

< Back Next > Cancel

Step 3: Specify the Date that the Product/Products Produced the Data

Procedure

1. Specify how often reports generate:
 - **Every 'n' days:** Reports generate on a per day or every 'n' days, depending on your selection (1 ~ 6).
 - **Weekly:** Reports generate weekly on the specified day.
 - **Bi-weekly:** Reports generate every two weeks on the specified day.
 - **Monthly:** Reports generate monthly on the first, 5th, 10th, 15th, 20th, 25th, or the last day of the month.
2. Specify the data range:
 - **Reports include data up to the Start the schedule time specified below:** This means that a report could have up to 23 hours more data contained in the report. While this has a small affect on weekly or monthly reports, this can make a "daily" report with almost two days worth of data depending on the Start schedule time.
 - **Reports include data up to 23:59:59 of the previous day:** This means that data collection for the report stops just before midnight. Reports will be an exact time period (example: Daily reports will be 24 hours) but will not contain the absolute latest data.
3. Specify when the report schedule starts:
 - **Immediately:** The report schedule starts immediately after enabling the report.
 - **Start on:** The report schedule starts on the date and time specified in the accompanying fields.
 - a. Type a date in the **mm/dd/yyyy** field.
 - b. Specify a time in the accompanying **hh** and **mm** fields.

**Note**

Click the calendar icon next to the **mm/dd/yyyy** field to use a dynamic calendar to specify the date range.

4. Click **Next.**

The **Add Scheduled Report > Step 4: Message Content and Recipients** screen appears.

Add Scheduled Report Help

Step 1 >>> Step 2 >>> Step 3 >>> **Step 4: Message Content and Recipients**

Message Content

Subject:

Message:

Report Recipients

☐ Email the report as an attachment

Users:
root
SSO_User

Recipient list:
--- Group List ---

>> <<

< Back Finish Cancel

Step 4: Specify the Recipient of the Report

Procedure

1. Type a title for the email message that contains the report in the **Subject** field.
2. Type a description about the report in the **Message** field.
3. Select **Email the report as an attachment** to enable sending the report to a specified recipient.
4. Specify to select users or groups from the **Report Recipients** list.
5. Select the users/groups to receive the report and click the >> button.

6. Click **Finish** after selecting all users/groups to receive the report.
-

Enabling/Disabling Scheduled Reports

By default, Control Manager enables scheduled profiles upon creation. In an event that you disable a profile (for example, during database or agent migration), you can re-enable it through the **Scheduled Reports** screen.

Procedure

1. Navigate to **Reports > Scheduled Reports**.

The **Scheduled Reports** screen appears.

2. Click the enabled () / disabled () icon in the **Enable** column of the Scheduled Reports table.

A disabled/enabled icon appears in the column.

Viewing Generated Reports

Aside from sending reports as email message attachments, view generated reports from one of these areas:

- One-time Reports
- Scheduled Reports

Viewing One-Time Reports

Procedure

1. Navigate to **Reports > One-time Reports**.

The **One-time Reports** screen appears.

2. Click the link for the report you want to view from the **View** column.
-

Viewing Scheduled Reports

Procedure

1. Navigate to **Reports > Scheduled Reports**.
The **Scheduled Reports** screen appears.
 2. Click the link for the report you want to view from the **History** column.
The **Scheduled Report History** screen for that report appears.
 3. Select the report to view from the **Scheduled Report History** screen.
-


Configuring Report Maintenance

Configure **Report Maintenance** settings to delete reports.

Procedure

1. Navigate to **Reports > Report Maintenance**.

The **Report Maintenance** screen appears.

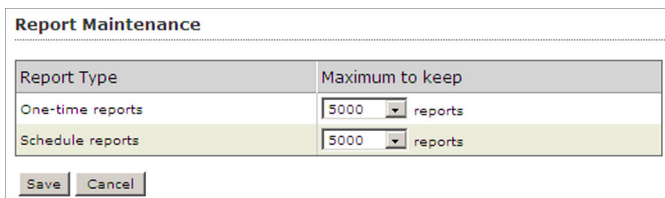

The screenshot shows the 'Report Maintenance' configuration window. It contains a table with two columns: 'Report Type' and 'Maximum to keep'. There are two rows: 'One-time reports' and 'Schedule reports'. Both rows have a dropdown menu set to '5000' and the text 'reports' next to it. At the bottom of the window are 'Save' and 'Cancel' buttons.

Report Type	Maximum to keep
One-time reports	5000 reports
Schedule reports	5000 reports

Save Cancel

2. Specify the maximum number of one-time and scheduled reports to keep.

3. Click **Save**.
-

Understanding My Reports

The **My Reports** screen contains all the reports a particular user (and the groups the user belongs to) creates. For each user that logs on to Control Manager the screen displays only the reports that the particular user (or group that the user belongs to) generated.


The **My Reports** screen displays the following:

TABLE 12-13. My Reports List

ITEM	DESCRIPTION
Name	The name of the generated report.
Period	The time and date when the report was generated.
Submitted Time	The time when the report was initiated.
Generated Time	The time when the report completed generation.
Format	The format used to generate the report (for example, PDF or xml).
Size	The size of the generated report.
View	Click the associated link in the row to view the report.

Part III

Administering Control Manager

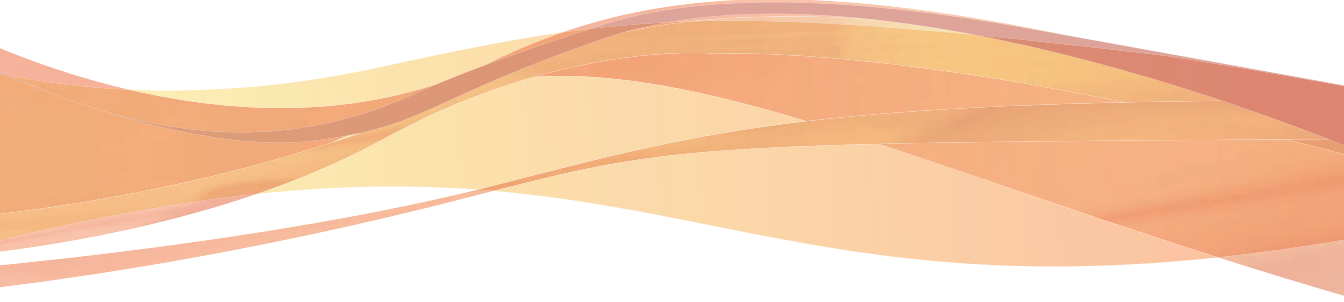

Chapter 13

MCP and Control Manager Agents

This chapter presents material administrators can use to understand the agents Control Manager uses to manage the network.

This chapter contains the following topics:

- *Understanding Agents on page 13-2*
- *Understanding Control Manager Security Levels on page 13-6*
- *Using the Agent Communication Schedule on page 13-8*
- *Understanding the Agent/ Communicator Heartbeat on page 13-9*
- *Using the Schedule Bar on page 13-11*
- *Configuring Agent Communication Schedules on page 13-12*
- *Configuring the Agent Communicator or Managed Server Heartbeat on page 13-14*
- *Stopping and Restarting Control Manager Services on page 13-16*
- *Modifying the Control Manager External Communication Port on page 13-16*
- *Verifying the Communication Method Between MCP and Control Manager on page 13-19*

Understanding Agents

Control Manager 5.0/5.5 uses MCP and Control Manager 2.x agents to manage products on the Control Manager network:

- Control Manager Agent (version 2.51 or higher) - Older versions of Trend Micro products require this agent, built according to the Control Manager 2.5/3.0 architecture.
- Trend Micro Management Communication Protocol (MCP) Agent - The next generation agent from Trend Micro, that supports enhanced security, SSO, one-way and two-way communication, and cluster nodes.

The following table enumerates the features supported by Control Manager 2.x and MCP agents.

TABLE 13-1. Agent Comparison

FEATURE	MCP AGENTS	CONTROL MANAGER 2.X AGENTS
Outbreak Prevention Services (OPS)	●	●
Single Sign-on (SSO)	●	
One-way/two-way communication	●	
NAT support	●	
Cluster node support	●	
Agent polls Control Manager for updates and commands	●	
Re-registration with the Control Manager server if the agent database is corrupted or deleted	N/A (This issue does not occur with MCP agents)	Automatic after 8 hours
Communication security	HTTPS/HTTP	Encryption with optional authentication
Communicators		●

FEATURE	MCP AGENTS	CONTROL MANAGER 2.x AGENTS
Work and idle state support	●	●
Agent/Communicator heartbeat	●	●
Notification: Virus pattern expired	●	●
Notification: Agent unable to update components	●	●
Notification: Agent unable to deploy components	●	●
Notification: Product service stopped	●	●

Each managed product has its own agent responsible for the following:

TABLE 13-2. MCP / 2.x Agent Comparison

MCP AGENTS	2.x AGENTS
Polling commands for the managed product from the Control Manager server	Receiving commands from the Control Manager server, through the Communicator
Collecting managed product status and logs, and sending them to the Control Manager server, through HTTPS or HTTP	Collecting managed product status and logs, and sending them to the Control Manager server, through the Communicator

Understanding Communicators

The Communicator, or the Message Routing Framework, serves as the communications backbone for the older managed products and Control Manager. This component of the Trend Micro Management Infrastructure (TMI) handles all communication between the Control Manager server and managed products for older products. Communicators interact with Control Manager to communicate with older managed products.

By installing the Control Manager 2.5 agent on a managed product server, you can use this application to manage the product with Control Manager. Agents interact with the

managed product and Communicator. An agent serves as the bridge between managed product and communicator. Hence, you must install agents on the same computer as managed products.

The Control Manager installation checks if the Communicator is already available on the managed product server. If so, it does not install another instance of the Communicator. Multiple agents in a product server share a single Communicator. The Communicator takes care of:

- Securing messages by encryption and anti-replay functions provided by the OpenSSL open source library, and Trend Micro-developed end-to-end authentication
- Receiving and relaying commands from the Control Manager server to the managed product
- Receiving and relaying status information from managed products to the Control Manager server

The above descriptions highlight the following points:

- TMI can exist by itself; managed products, on the other hand, cannot operate in the absence of communicator
- Though there can be as many agents on a server as there are managed products, only one Communicator is required for each server
- Multiple managed products can share communicator functions

Understanding Connection Status Icons

The Control Manager managed products, managed servers, Communicators, and child server use the following connection status icons:

TABLE 13-3. Status Icons for Managed Products/Servers

CONNECTION STATUS DESCRIPTION	MANAGED PRODUCT
Product service is running	

CONNECTION STATUS DESCRIPTION	MANAGED PRODUCT	
Product service is not running		
TMI service is not running		Within heartbeat's maximum delay setting
		Beyond the heartbeat's maximum delay setting
The socket or network connection between the Communicator and managed product is broken		
Unable to resolve the DNS name between the Communicator and Control Manager server		Within heartbeat's maximum delay setting
		Beyond the heartbeat's maximum delay setting

TABLE 13-4. Status Icons for Communicators

CONNECTION STATUS DESCRIPTION	COMMUNICATORS	
TMI service is running		
TMI service is not running		Within heartbeat's maximum delay setting
		Beyond the heartbeat's maximum delay setting
Idle mode following the Agent/Communicator Scheduler		
The socket or network connection between the Communicator and managed product is broken		
Unable to resolve the DNS name between the Communicator and Control Manager server		

TABLE 13-5. Status Icons for Child Servers

CONNECTION STATUS DESCRIPTION	CHILD	
TMI service is not running	Status is unchanged	Within heartbeat's maximum delay setting
		Beyond the heartbeat's maximum delay setting
The child server service (Casprocessor.exe) is running		
Casprocessor.exe or the child server's Communicator is not running. Either the child server is shutdown or the Communicator service is disabled		
The child server is disabled from the parent server web console		

Understanding Control Manager Security Levels

Control Manager has three security levels used for the communication between the server and managed products and child servers for both older agents and MCP agents. For MCP agents, Security Level applies to the virtual folders of IIS, comprising of three different levels: high, medium, and normal.

- High: Specifies Control Manager communicates only using HTTPS
- Medium: Specifies Control Manager uses HTTPS to communicate when available, but uses HTTP when HTTPS is not available
- Normal: Specifies Control Manager uses HTTP to communicate

The security behavior corresponds to each security level listed below:

FEATURES	SECURITY LEVEL		
	HIGH	MEDIUM	NORMAL
Supports only HTTPS UI access	●	●	
Supports HTTPS and HTTP UI access			●
Supports redirect to HTTPS or HTTP product UI	●	●	●
Only integrates with HTTPS supported products (MCP)	●		
Integrates with both HTTP and HTTPS supported products		●	●
Allow products to download updates from Control Manager through either HTTP or HTTPS	●	●	●

Depending on the security level of older agents, Control Manager provides the following encryption and authentication:

- **SSL packet-level encryption:** Control Manager applies Secure Socket Layer (SSL) packet-level encryption to all security levels. SSL packet-level encryption is a protocol developed by Netscape for secure transactions across the web. SSL uses a form of public key encryption, where the information can be encoded by the browser using a publicly available public key, but can only be decoded by a party who knows the corresponding private key.

The Control Manager agents can encrypt their communication using the public key. In return, the Control Manager server uses a private key to decrypt the agent message.

- **Trend Micro authentication:** Control Manager applies Trend Micro authentication 5 (High) security level.

When using High level, Control Manager first applies the SSL packet-level encryption and then further strengthens the encryption through Trend Micro authentication.

**Note**

You can modify the Control Manager security level through `TMI.cfg`. However, doing so requires the modification of all `TMI.cfg` present in the Control Manager network. This includes the `TMI.cfg` of the Control Manager server and all managed products and child servers. Otherwise, the server and agent communication will not work.

TABLE 13-6. Security Level Behavior for Older Agents

SECURITY LEVEL (FOUND IN TMI.CFG)	SECURITY LEVEL SELECTION (DURING INSTALLATION)	END-TO-END AUTHENTICATION	MESSAGE-LEVEL ENCRYPTION
1	Low	N/A	40-bit (RC4)
2	Medium	N/A	128-bit (RC4)
5	High	Trend Micro authentication	128-bit (RC4 + 3DES)

Using the Agent Communication Schedule

The Agent Communication Schedule determines the periods when the agent sends information to the Control Manager server, allowing you to manage the flow of information.

The Control Manager agent installation assigns a default communication schedule. You can modify the schedule to suit your Control Manager network needs. The Agent Communication Scheduler follows a daily setting, that is, it applies the schedule to an agent on a daily basis. There is no weekly or monthly work hour configuration available.

When you set a schedule, that schedule applies to all managed products registered to Control Manager.

**Note**

When an agent is idle during an Outbreak Prevention Mode, corresponding managed products still perform Outbreak Prevention Service commands without reporting the result to Control Manager. As a result, Control Manager does not know the status or result. Command Tracking lists the result of Outbreak Prevention Policy-related commands under the Fail category.

The Agent Communication idle and working schedules apply only to the managed product agents. You cannot set the idle schedule for Control Manager 3.5 child servers.

**Note**

The Agent Communication Schedule lists the child server agents.

Understanding the Agent/Communicator Heartbeat

“Heartbeat” refers to the MCP or Control Manager 2.x agent message that notifies the Control Manager server with "I am alive" information. The agent provides this mechanism to determine whether the managed products remain active.

**Note**

Use the **Agent Communication Schedule** screen to define the heartbeat working and idle hours.

The agent polls the Control Manager server at regular intervals to ensure that the Control Manager console displays the latest information and to verify the connection between the managed product and the server remains functional.

There are three heartbeat statuses:

- **Active:** within the working hour
- **Inactive:** idle hour or not within the Working hour
- **Abnormal:** disconnected

Refer to [Understanding Connection Status Icons on page 13-4](#) for details.

**Note**

In addition to providing periodic heartbeat to the Control Manager server, the agent also sends real-time managed product status information to the server.

MCP Heartbeat

To monitor the status of managed products, MCP agents poll Control Manager based on a schedule. Polling occurs to indicate the status of the managed product and to check for commands to the managed product from Control Manager. The Control Manager web console then presents the product status. This means that the managed product's status is not a real-time, moment-by-moment reflection of the network's status. Control Manager checks the status of each managed product in a sequential manner in the background. Control Manager changes the status of managed products to offline when a fixed period of time elapses without a heartbeat from the managed product.

Active heartbeats are not the only means Control Manager determines the status of managed products. The following also provide Control Manager with the managed product's status:

- Control Manager receives logs from the managed product. Once Control Manager receives any type of log from the managed product successfully, this implies that the managed product is working fine.
- In two-way communication mode, Control Manager actively sends out a notification message to trigger the managed product to retrieve the pending command. If server connects to the managed product successfully, it also indicates that the product is working fine and this event counts as a heartbeat.
- In one-way communication mode, the MCP agent periodically sends out query commands to Control Manager. This periodical query behavior works like a heartbeat and is treated as such by Control Manager.

The MCP heartbeats implement in the following ways:

- **UDP:** If the product can reach the server using UDP, this is the lightest weight, fastest solution available. However, this does not work in NAT or firewall

environments. In addition, the transmitting client cannot verify that the server does indeed receive the request.

- **HTTP/HTTPS:** To work under a NAT or firewall environment, a heavyweight HTTP connection can be used to transport the heartbeat

Control Manager supports both UDP and HTTP/HTTPS mechanisms to report heartbeats. Control Manager server finds out which mode the managed product applies during the registration process. A separate protocol handshake occurs between both parties to determine the mode.

Aside from simply sending the heartbeat to indicate the product status, additional data can upload to Control Manager along with the heartbeat. The data usually contains managed product activity information to display on the console.

Using the Schedule Bar

Use the schedule bar on the **Agent Communication Schedule** screen to display and set Communicator schedules. The bar has 24 slots, each representing the hours in a day.

The slots with clock icons denote working status or the hours that the Agent/Communicator sends information to the Control Manager server. White slots indicate idle time. Define working or idle hours by toggling specific slots.

You can specify at most three consecutive periods of inactivity. The sample schedule bar below shows only two inactive hours:




FIGURE 13-1. Schedule bar

The active periods specified by the bar are from 0:00 to 7:00, 8:00 to 4:00 PM, and from 6:00 P.M. to midnight.

Determining the Right Heartbeat Setting

When choosing a heartbeat setting, balance between the need to display the latest managed product status information and the need to manage system resources. The

default setting is satisfactory for most situations, however consider the following points when you customize the heartbeat setting:

TABLE 13-7. Heartbeat Recommendations

HEARTBEAT FREQUENCY	RECOMMENDATION
Long-interval Heartbeats (above 60 minutes)	The longer the interval between heartbeats, the greater the number of events that may occur before Control Manager reflects the communicator status in the Control Manager web console. For example, if a connection problem with a Communicator is resolved between heartbeats, it then becomes possible to communicate with a Communicator even if the status appears as (inactive) or (abnormal).
Short-interval Heartbeats (below 60 minutes)	Short intervals between heartbeats present a more up-to-date picture of your network status at the Control Manager server. However, this is a bandwidth-intensive option.

Configuring Agent Communication Schedules

You can define up to three sets of schedules that specify when the managed product interacts with the Control Manager server.

A child Control Manager server should always have constant communication with the parent Control Manager server; the **Agent Communication Schedule** screen does not allow changes in a child server's agent communication schedule with the child server's managed products.

Setting an Agent Communication Schedule for a Managed Product

Procedure

1. Navigate to **Administration > Settings > Agent Communication Schedule**.

The **Agent Communication Schedule** screen appears.

Agent Communication Schedule			Help
Edit Multiple Schedules Reset to Default Schedule			1 - 4 of 4 H Page 1 of 1 H
☐ Communicator	IP Address	Schedule	
Default Schedule	all managed products	0 - 24	
☐ JMSVAG01.tmcmy4v6.com	10.201.158.210	0-24	
☐ SERVER2008	10.201.188.97, [fe80::28e0:da99:83bc:4f8d]	0-24	
☐ TMCIM-SMEV2	10.201.158.27	0-24	
☐ WIN-DTZ675ZQHSA	[fe80::98c9:50d3:925f:cb3a], [2620:101:4003:740::1:4e02], [fe80::1428:17f0:f596:7edf], 10.201.129.32, 2001:0-d:137:9a76::1428:17f0:f596:7edf]	0-24	
Edit Multiple Schedules Reset to Default Schedule			1-4 of 4 H Page 1 of 1 H
			Rows per page: 10

2. Select the managed product schedule to modify.

The **Set Communicator Schedule** screen appears.

Set Communicator Schedule		Help
Daily Schedule		
You can specify up to three consecutive time periods in which the managed product communicates with Control Manager: For example: Specifying 00-06 qualifies as one consecutive time period		
Time slot: 00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24		
Legend: ☒ Scheduled ☐ Idle		Select All Clear All
Save Cancel		

3. Define the schedule. Specify a new time or use the default setting:
 - To specify a new setting, change the appropriate time slots in the schedule bar and then click **Save**
 - To use the default setting, return to the **Agent Communication Schedule** screen. Select the schedule to apply and click **Reset to Default Schedule**

Modifying the Default Agent Communication Schedule

Use the default schedule to automatically set the agent communication schedule.

Procedure

1. Navigate to **Administration > Settings > Agent Communication Schedule**.

The **Agent Communication Schedule** screen appears.

Communicator	IP Address	Schedule
Default Schedule	all managed products	0 - 24
IMSVA014tcmv4v6.com	10.201.158.210	0-24
SERVER2008	10.201.188.97, [fe80::2e0:da99:83bc:4f8d]	0-24
TMCN-SMEV2	10.201.158.27	0-24
WIN-DTZ675ZQH6A	[fe80::98c9:50d3:925f:cb3a], [2620:101:4003:740::1:4e02], [fe80::1428:17f0:f536:7edf], 10.201.129.32, [2001:0:4:137:9a76:1428:17f0:f536:7edf]	0-24

- On the working area, click **Default Schedule**.

Daily Schedule

You can specify up to three consecutive time periods in which the managed product communicates with Control Manager:
For example: Specifying 00-06 qualifies as one consecutive time period

Time slot: 00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

Legend: ☒ Scheduled ☐ Idle

Select All Clear All

Save Cancel

- On the **Daily Schedule**, change the appropriate time slots.
- Click **Save**.

Configuring the Agent Communicator or Managed Server Heartbeat

Use the **Communication Time-out** screen to define the frequency and maximum delay times (in minutes) for the Control Manager server and *product agent on page 13-2/managed server on page 6-2* communication.

**Note**

The agent/communicator heartbeat setting only applies to Communicators for managed products directly controlled by the Control Manager server. Child Control Manager server agent/communicators use pre-defined values:

Frequency: 3 minutes

Maximum delay: 5 minutes

Procedure

1. Navigate to **Administration > Settings > Communication Time-out Settings**.

The **Communication Time-out** screen appears.

2. On the working area, leave the default values or specify new settings for the following:
 - **Report managed product status every:** Defines how often the managed product or server responds to Control Manager server messages. Valid values are between 5 to 480 minutes
 - **If no communication, set status as abnormal after:** Specifies how long Control Manager waits for a response from the managed product or server before changing its web console status to (inactive). Valid values are between 15 and 1440 minutes.

**Note**

The **If no communication, set status as abnormal after** value must be at least triple the **Report managed product status every** value.

3. Click **Save**.
-

Stopping and Restarting Control Manager Services

Use the **Windows Services** screen to restart any of the following Control Manager services:

- Trend Micro Management Infrastructure
- Trend Micro Common CGI
- Trend Micro Control Manager



Note

These are the services that run in the background on the Windows operating system, not the Trend Micro services that require Activation Codes (for example, Outbreak Prevention Services).

Procedure

1. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
 2. Right-click **<Control Manager service>**, and then click **Stop**.
 3. Right-click **<Control Manager service>**, and then click **Start**.
-

Modifying the Control Manager External Communication Port

The Communicator is responsible for agent and server communication.

By default, the Communicator uses port 10198 for communication between Control Manager processes (internal communication) and port 10319 for communication between the Control Manager agent and server (external communication).

Changing the External Communication Port on the Control Manager Server

Procedure

1. Open `<root>\Program Files\Trend Micro\COMMON\ccgi\commoncgi\config\CCGI_Config.xml` using a text editor (for example, Notepad).



WARNING!

Use care when modifying Control Manager *.xml or *.cfg files. To ensure that you can roll back to the original settings, back up CCGI_Config.xml.

2. Specify a new value for the OuterPort parameter.

This value represents the external communication port. For example, set `OuterPort="2222"` to use port 2222.

3. Save and close CCGI_Config.xml.
4. Open `<root>\Program Files\Trend Micro\COMMON\TMI\TMI.cfg` using a text editor.



WARNING!

Making incorrect changes to the configuration file can cause serious system problem. Back up TMI.cfg to restore your original settings.

5. Replace the OuterPort parameter value to match the value of CCGI_Config.xml.
 6. Save and close TMI.cfg.
 7. Stop and restart all Control Manager services.
-

Modifying the Security Level for TMI Agents

Control Manager implements the security level you specified during the Control Manager installation. `TMI.cfg` allows you to change the security level without reinstalling the product.

Procedure

1. Open `<root>:\Program files\Trend Micro\COMMON\TMI\TMI.cfg` using any text editor (for example, Notepad).



WARNING!

Making incorrect changes to the configuration file can cause serious system problem.

2. Back up `TMI.cfg` to restore your original settings.
3. Change the value of `MaxSecurity` parameter. Use 1, 2, or 5, which corresponds to the security level you want.
4. Save and close `TMI.cfg`.
5. Open the **Windows Services** screen to stop and then restart the Control Manager services.
6. Repeat steps 1 to 3 to modify `TMI.cfg` for all agents present in your Control Manager network.



WARNING!

Set all `TMI.cfg` in your Control Manager network (server and agents) to the same security level value (`MaxSecurity`). Otherwise, the server and agent communication will not work.

Modifying the Communicator Heartbeat Protocol

By default, the connectionless User Datagram Protocol (UDP) is used to send Communicator Heartbeat from managed product to the Control Manager server.

Procedure

1. Open `<root>:\program files\Trend Micro\COMMON\TMI\TMI.cfg` using any text editor (for example, Notepad).

**WARNING!**

Making incorrect changes to the configuration file can cause serious system problem. Back up `TMI.cfg` to restore your original settings.

2. Change the value of `AllowUDP` parameter to 0.
3. Save and close `TMI.cfg`.
4. Open the **Windows Services** screen to stop and then restart the Control Manager services.
5. Repeat steps 1 to 3 to modify `TMI.cfg` for all agents present in your Control Manager network.

**WARNING!**

Set all `TMI.cfg` in your Control Manager network (server and agents) to the same security level value (`AllowUDP`). Otherwise, the server and agent communication will not work.

Verifying the Communication Method Between MCP and Control Manager

Control Manager auto-detects the connection method MCP agents use when communicating with Control Manager. For two-way communication, Control Manager uses CGI notifications to communicate with MCP agents.

Verifying Control Manager Uses Two-way Communication

This procedure uses the default installation settings for Control Manager.

Procedure

1. Open the SQL server management application and locate the Control Manager database table.
2. Locate **CDSM_Entity**.
3. Locate and verify the following from CDSM_Entity:

Locate the **Token** column. Information in the column appears in the following format: URLTOKEN:2; http;<IP address>;80; cgiCmdNotify;;! CRYPT!10...

- URLTOKEN:1 signifies that the agent uses one-way communication to communicate with Control Manager.
 - URLTOKEN:2 signifies that the agent uses two-way communication to communicate with Control Manager.
-

Verifying Control Manager Uses Two-way Communication from the Web Console

Procedure

1. Click **Products**.

The **Product Directory** screen appears.

2. Click the product or directory in the Product Directory.
3. Click **Folder**.

The information in the work area changes.

4. Select **Connection Information View** from the **Folder** drop-down list.

The **Mode** column displays which communication mode, the MCP agent on the managed product uses.

Understanding Control Manager Agent Remote Installation

Control Manager can supports Control Manager 2.5x and MCP agents. However, only Control Manager 2.5x agents require a separate installation. Use the **Product Agent Settings** screen to obtain the remote installation programs for Control Manager 2.x agents.

**Note**

Remote installation is the preferred installation method for deploying Control Manager 2.x agents on large numbers of older managed product servers. This capability allows you to install Control Manager 2.x agents without being physically at the target server.

There are two agent remote installation programs for installing Control Manager 2.x agents:

AGENT	DESCRIPTION
CMAgentSetup.exe	The basis of this agent installation program is a program similar to the one used in Trend Virus Control System 1.x. All agents required for the corresponding products are contained in this file. Use CMAgentSetup.exe to install the Control Manager agent for InterScan Messaging Security Suite 5.1 (InterScan Messaging Security Suite 5.15 and above uses RemoteInstall.exe).

AGENT	DESCRIPTION
RemoteInstall.exe	This is an agent installation tool introduced in Control Manager 2.5. It serves two purposes: • To install agents to supported product servers • To upload agent packages to Control Manager servers This tool differs from the original <code>CMAgentSetup.exe</code> program because it does not actually contain any agents. Instead, it uses agent packages stored on Control Manager servers. The tool merely identifies the target servers, and then the setup programs in the agent packages themselves perform the installation. After a fresh Control Manager installation, Control Manager servers do not contain agent packages. The antivirus or content security product uploads and stores their agents to the server, before you can install these agents.

Chapter 14

Administering Managed Products

This chapter presents material administrators need when managing the Control Manager network.

This chapter contains the following topics:

- *Manually Deploying Components Using the Product Directory on page 14-2*
- *Viewing Status Summaries for Managed Products on page 14-3*
- *Configuring Managed Products on page 14-4*
- *Issuing Tasks to Managed Products on page 14-5*
- *Understanding the Directory Management Screen on page 14-13*

Manually Deploying Components Using the Product Directory


Manual deployments allow you to update the virus patterns, spam rules, and scan engines of your managed products on demand. Use this method of updating components during virus outbreaks.

Download new components before deploying updates to a specific managed product or groups of managed products.

Procedure

1. Click **Directories** > **Products** from the main menu.

The **Product Directory** screen appears.

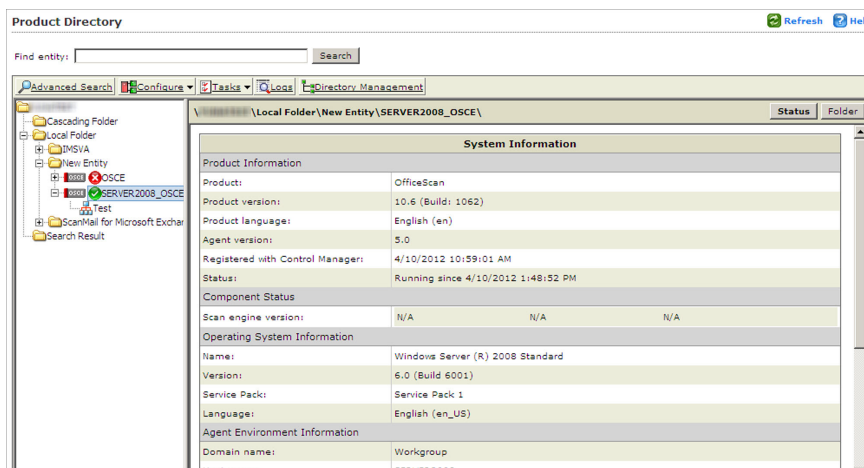

2. Select a managed product or directory from the Product Directory.

The managed product or directory highlights.

3. Move the cursor over **Tasks** from the Product Directory menu.
4. Select **Deploy <component>** from the drop-down menu.

5. Click **Deploy Now** to start the manual deployment of new components.
 6. Monitor the progress through the **Command Tracking** screen.
 7. Click the **Command Details** link on the **Command Tracking** screen to view details for the Deploy Now task.
-

Viewing Status Summaries for Managed Products

The **Product Status** screen displays the Antivirus, Content Security, and Web Security summaries for all managed products present in the Product Directory tree.

There are two ways to view the managed products status summary:

- Through the dashboard using the **Threat Detection Results** widget (found on the **Summary** tab)
- Through the Product Directory

Accessing Through the Dashboard

Upon opening the Control Manager web console, the **Summary** tab on the **Dashboard** displays the summary of the entire Control Manager network. This summary is identical to the summary provided by the **Product Status** tab in the Product Directory Root folder.

Accessing Through the Product Directory

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. From the Product Directory tree, select the desired folder or managed product.

- If you click a managed product, the **Product Status** tab displays the managed product's summary.
- If you click the Root folder, New entity, or other user-defined folder, the **Product Status** tab displays Antivirus, Content Security, and Web Security summaries.

**Note**

By default, the **Status Summary** displays a week's worth of information ending with the day of your query. You can change the scope to **Today**, **Last Week**, **Last Two Weeks**, or **Last Month** in the **Display** summary for list.

Configuring Managed Products

Depending on the product and agent version you can configure the managed product from the managed product's web console or through a Control Manager-generated console.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Select the desired managed product from the **Product Directory** tree.

The product status appears in the right-hand area of the screen.

3. Move the cursor over **Configure** in the **Product Directory** menu.

4. Select one of the following:

- **Configuration Replication:** The **Configuration Settings** screen appears.
 - a. Select the folder to which the selected managed product's settings replicate from the **Product Directory** tree.
 - b. Click **Replicate**.

The selected managed product's settings replicate to the target managed products.

- **<Managed Product Name> Single Sign On:** The managed product's web console or Control Manager-generated console appears.
- a. Configure the managed product from the web console.

**Note**

For additional information about configuring managed products, refer to the managed product's documentation.

Issuing Tasks to Managed Products

Use the **Tasks** menu item to invoke available actions to a specific managed product. Depending on the managed product, all or some of the following tasks are available:

- Deploy engines
- Deploy pattern files/cleanup templates
- Deploy program files
- Enable or disable Real-time Scan
- Start Scan Now

Deploy the latest spam rule, pattern, or scan engine to managed products with outdated components. To successfully do so, the Control Manager server must have the latest components from the Trend Micro ActiveUpdate server. Perform a manual download to ensure that current components are already present in the Control Manager server.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. Select the managed product or directory to issue a task.

3. Move the cursor over **Tasks**.
 4. Click a task from the list. Monitor the progress through Command Tracking. Click the **Command Details** link at the response screen to view command information.
-


Querying and Viewing Managed Product Logs

Use the **Logs** tab to query and view logs for a group or a specific managed product.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. Select the desired managed product or folder from the **Product Directory**.
3. Move the cursor over **Logs** in the **Product Directory** menu.
4. Click **Logs** from the drop-down menu.

The **Ad Hoc Query > Step 2: Select Data View** screen appears.

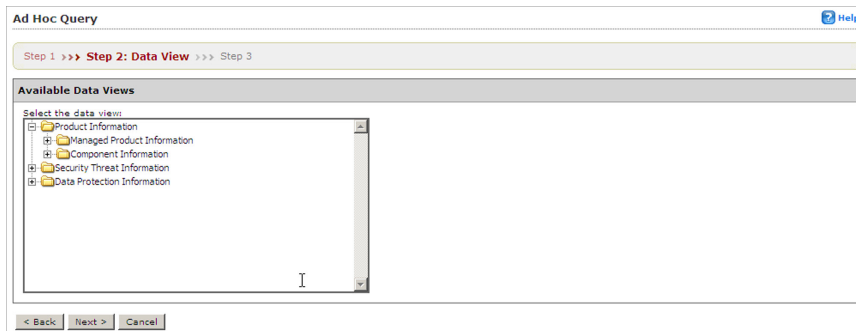

5. Specify the data view for the log:
 - a. Select the data to query from the **Available Data Views** area.
 - b. Click **Next**.

The **Ad Hoc Query > Step 3: Query Criteria** screen appears.

6. Specify the data to appear in the log and the order in which the data appears. Items appearing at the top of the Selected Fields list appear as the left most column of the table. Removing a field from Selected Fields list removes the corresponding column from the Ad Hoc Query returned table.
 - a. Click **Change column display**.

The **Select Display Sequence** screen appears.

- b. Select a query column from the Available Fields list.
Select multiple items using the SHIFT or CTRL keys.

- c. Click **>** to add items to the Selected Fields list.
 - d. Specify the order in which the data displays by selecting the item and clicking **Move up** or **Move down**.
 - e. Click **Back** when the sequence fits your requirements.
7. Specify the filtering criteria for the data:

**Note**

When querying for summary data, users must specify the items under **Required criteria**.

- **Required criteria:**
 - Specify a **Summary Time** for the data or whether you want COOKIES to appear in your reports.
- **Custom criteria:**
 - a. Specify the criteria filtering rules for the data categories:
 - **All of the criteria:** This selection acts as a logical “AND” function. Data appearing in the report must meet all the filtering criteria.
 - **Any of the criteria:** This selection acts as a logical “OR” function. Data appearing in the report must meet any of the filtering criteria.
 - b. Specify the filtering criteria for the data. Control Manager supports specifying up to 20 criteria for filtering data.

**Tip**

If you do not specify any filtering criteria, the Ad Hoc Query returns all results for the applicable columns. Trend Micro recommends specifying filtering criteria to simplify data analysis after the information for the query returns.

8. Save the query:
- a. Click **Save this query to the saved Ad Hoc Queries list**.

- b. Type a name for the saved query in the **Query Name** field.

9. Click **Query**.

The **Results** screen appears.

10. Save the report as a CSV file:

- a. Click **Export to CSV**.
- b. Click **Download**.
- c. Specify the location to save the file.
- d. Click **Save**.

11. Save the report as an XML file:

- a. Click **Export to XML**.
- b. Click **Download**.
- c. Specify the location to save the file.
- d. Click **Save**.



Tip

To query more results on a single screen, select a different value in **Rows per page**. A single screen can display 10, 15, 30, or 50 query results per page.

12. Save the settings for the query:

- a. Click **Save query settings**.
- b. Type a name for the saved query in the **Query Name** field.
- c. Click **OK**.

The saved query appears on the **Saved Ad Hoc Queries** screen.

About Recovering Managed Products Removed From the Product Directory

The following scenarios can cause Control Manager to delete managed products from the Product Directory:

- Reinstalling the Control Manager server and selecting **Delete existing records and create a new database**

This option creates a new database using the name of the existing one.

- Replacing the corrupted Control Manager database with another database of the same name
- Accidentally deleting the managed product from **Directory Management**

If the records for a Control Manager server's managed products are lost, TMI agents on the products still "know" where they are registered. The Control Manager agent automatically re-registers itself after 8 hours or when the service restarts.

MCP agents do not re-register automatically. Administrators must manually re-register managed products using MCP agents.

Recovering Managed Products Removed From the Product Directory

Procedure

- Restart the Trend Micro Control Manager service on the managed product server.

For more information, see [Stopping and Restarting Control Manager Services on page 13-16](#).

- Wait for the Agent to re-register itself: By default, the older Control Manager agents verify their connection to the server every eight (8) hours. If the agent detects that its record has been deleted, it will re-register itself automatically.

Refer to [Changing Control Manager 2.x Agent Connection Re-Verification Frequency on page 14-11](#) to modify the agent verification time.

- Manually re-register to Control Manager: MCP agents do not re-register automatically and need to be manually re-registered to the Control Manager server.
-

Changing Control Manager 2.x Agent Connection Re-Verification Frequency

By default, Control Manager 2.x agents verify their connection with the Control Manager server every eight hours. Edit a configuration file on the agent computer to modify the frequency.



Note

MCP agents cannot reconnect to Control Manager if the connection is lost. A user must manually re-register the managed products.

Procedure

1. From the managed product's server, navigate to the Control Manager agent home directory (for example, `C:\Program Files\Trend\IMSS\Agent`).
 2. Back up `Entity.cfg`.
 3. Open `Entity.cfg` using a text editor (for example, Notepad).
 4. Search for the parameter `ENTITY_retry_hour` and specify an integer value to modify the default verification time. The `ENTITY_retry_hour` value is in terms of number of hours. Acceptable values are from 1 to 24 hours.
 5. Save and close `Entity.cfg` to apply the new verification time.
-

Searching for Managed Products, Product Directory Folders, or Computers

Use the **Search** button to quickly locate a specific managed product in the Product Directory.

Searching for a Folder or Managed Product

Procedure


1. Access the Product Directory.
 2. Type the display name of the managed product in the **Find entity** field.
 3. Click **Search**.
-

Performing an Advanced Search

Procedure

1. Access the Product Directory.
2. Click **Advanced Search**.

The **Advanced Search** screen appears.

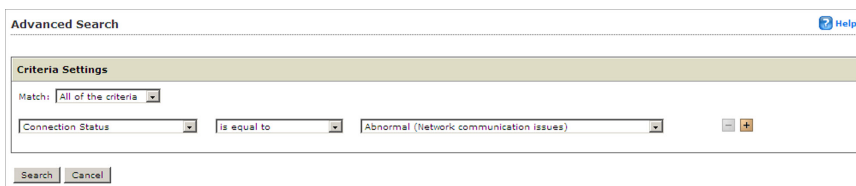

3. Specify your filtering criteria for the product. Control Manager supports up to 20 filtering criteria for searches.
4. Click **Search** to start searching.

Search results appear in the **Search Result** folder of the Product Directory.

Refreshing the Product Directory

Procedure

- On the **Product Directory** screen, click the **Refresh** icon on the upper right corner of the screen.
-

Understanding the Directory Management Screen

After registering to Control Manager, the managed product appears in the Product Directory under the default folder.

Use the **Directory Management** screen to customize the Product Directory organization to suit your administration needs. For example, you can group products by location or product type (messaging security, web security, file storage protection).

The directory allows you to create, modify, or delete folders, and move managed products between folders. You cannot, however, delete nor rename the New entity folder.

Carefully organize the managed products belonging to each folder. Consider the following factors when planning and implementing your folder and managed product structure:

- Product Directory
- User Accounts
- Deployment Plans
- Ad Hoc Query
- Control Manager reports

Group managed products according to geographical, administrative, or product-specific reasons. In combination with different access rights used to access managed products or

folders in the directory, the following table presents the recommended grouping types as well as their advantages and disadvantages.

TABLE 14-1. Product Grouping Comparison

GROUPING TYPE	ADVANTAGES	DISADVANTAGES
Geographical or Administrative	Clear structure	No group configuration for identical products
Product type	Group configuration and status is available	Access rights may not match
Combination of both	Group configuration and access right management	Complex structure, may not be easy to manage

Using the Directory Management Screen Options

Use these options to manipulate and organize managed products in your Control Manager network.

The **Directory Management** screen provides several options:

- Add directories to the Product Directory
- Rename directories in the Product Directory
- Move managed products or directories in the Product Directory
- Remove managed products or directories from the Product Directory



Note

The keep permissions check box allows a folder to keep its source permission when moved.

Using the Directory Management Screen

Procedure

- Select a managed product or directory and click **Rename** to rename a managed product or directory
 - Click **+** or the folder to display the managed products belonging to a folder
 - Drag managed products or directories to move the managed products or directories in the Product Directory
 - Click **Add Folder** to add a directory to the Product Directory
-

Accessing the Directory Management Screen

Use the **Directory Management** screen to group managed products together.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. Click **Directory Management** from the **Product Directory** menu.

The **Directory Management** screen appears.



Creating Folders

Group managed products into different folders to suit your organization's Control Manager network administration model.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. Click **Directory Management** from the **Product Directory** menu.
The **Directory Management** screen appears.
3. Select **Local Folder**.
4. Click **Add Folder**.
The **Add Directory** screen appears.
5. Type a name for the new directory in the **Directory name** field.

6. Click **Save**.

**Note**

Except for the **New Entity** folder, Control Manager lists all other folders in ascending order, starting from special characters (!, #, \$, %, (,), *, +, -, comma, period, +, ?, @, [,], ^, _ , {, |, }, and ~), numbers (0 to 9), or alphabetic characters (a/A to z/Z).

Renaming Folders or Managed Products

Rename directories and managed products on the **Directory Management** screen.

**Note**

Renaming a managed product only changes the name stored in the Control Manager database; there are no effects to the managed product.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
2. Click **Directory Management** from the **Product Directory** menu.
The **Directory Management** screen appears.
3. Select the managed product or directory to rename.
4. Click **Rename**.
The **Rename Directory** screen appears.
5. Type a name for the managed product or directory in the **Directory name** field.
6. Click **Save**.
7. Click **OK**.

The managed product or directory displays in the Product Directory with the new name.

Moving Folders or Managed Products

When moving folders pay special attention to the **Keep the current user access permissions when moving managed products/folders** check box. If you select this check box and move a managed product or folder, the managed product or folder keeps the permissions from its source folder. If you clear the keep permissions check box, and then move a managed product or folder, the managed product or folder assumes the access permissions from its new parent folder.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Click **Directory Management** from the **Product Directory** menu.

The **Directory Management** screen appears.

3. On the working area, select the folder or managed product to move.
 4. Drag the folder or managed product to the target new location.
 5. Click **Save**.
-

Deleting User-Defined Folders

Take caution when deleting user-defined folders on the **Directory Management** screen. You may accidentally delete a managed product which causes it to unregister from the Control Manager server.



Note

You cannot delete the **New Entity** folder.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
 2. Click **Directory Management** from the **Product Directory** menu.
The **Directory Management** screen appears.
 3. Select the managed product or directory to delete.
 4. Click **Delete**.
A confirmation dialog box appears.
 5. Click **OK**.
 6. Click **Save**.
-

Chapter 15

Activating Control Manager and Managed Products

This chapter presents material administrators will need to activate or renew product licenses for Control Manager or managed products.

This chapter contains the following topics:

- *Activating and Registering Managed Products on page 15-2*
- *Understanding License Management on page 15-2*
- *Renewing Managed Product Licenses on page 15-5*
- *About Activating Control Manager on page 15-7*
- *Renewing Maintenance for Control Manager or Managed Service on page 15-10*

Activating and Registering Managed Products

To use the functionality of Control Manager 6.0 Service Pack 1, managed products (OfficeScan, ScanMail for Microsoft Exchange), and other services (Outbreak Prevention Services), you need to obtain Activation Codes and activate the software or services. Included with the software is a Registration Key. Use that key to register your software online to the Trend Micro Online Registration website and obtain an Activation Code.

As managed products register to Control Manager, the managed products add their Activation Codes to the managed product Activation Code list on the **License Management** screen. Administrators can add new Activation Codes to the list and redeploy renewed Activation Codes.

All Activation Codes share the following characteristics:

- Created in real-time during registration
- Created based on Registration Key information
- Has an expiration date
- Product version independent



Note

In previous versions of Control Manager, a serial number was included with the product, and users needed to register online to use all the features of the software.

Understanding License Management

From the **License Management** screen, view, manage, and deploy the licenses of all managed products.



Note

Vary the number of Activation Codes the **License Management** screen displays using the **Rows per page** feature. The **License Management** screen can display 10 (default setting), 15, 30, or 50 Activation Codes at a time.

SCREEN COMPONENT	DESCRIPTION
Activation Code	Displays the Activation Code for the managed product.
Note	Displays additional information about the Activation Code.
Products	Displays the number of managed products to which the Activation Code deploys.
Status	Displays the status of the Activation Code: - Activated - Expired
Type	Displays the type of the Activation Code: Full: Allows full use of the product for the maintenance period (typically 1 year) Trial: Allows full use of the product for the evaluation period (typically 3 months)
Expiration Date	Displays the date the Activation Code expires.
Seat Count	Displays the number of seats the Activation Code allows.
View license information online	Opens your default Internet browser to launch the Trend Micro Customer License Portal. This portal allows you to manage your Trend Micro business account, which includes: - Activation Codes for on-premise products Subscriptions to Trend Micro Software as a Service solutions on page 6-7

Activating Managed Products

Activating managed products allows you to use all the features for the product, including downloading updated program components. You can activate managed products after obtaining an Activation Code from your product package or by purchasing one through a Trend Micro reseller.

6. Click **Finish**.

The **License Management** screen appears, with the new Activation Code listed in the table.

Renewing Managed Product Licenses

Control Manager can deploy or redeploy Activation Codes to registered products from the Product Directory or from the **License Management** screen.

Renewing Managed Product Licenses from the License Management Screen

Procedure

1. Navigate to **Administration > License Management > Managed Products**.

The **License Management** screen appears.

2. Select an Activation Code from the list.
3. Click **Re-Deploy**.

The **Re-Deploy License** screen appears.

Re-Deploy License Help

License Information

Activation Code: 00000000000000000000000000000000

Status: Activated

Type: Full

Expiration Date: 12/31/2012 12:00:00 AM

Note:

Select Product For Activation Code Deployment

Local Folder

Save Cancel

4. Click **Save**.

**Note**

If no products appear in the list, the selected Activation Code does not support any products currently registered to Control Manager.

Renewing Managed Product Licenses from the Product Directory

Procedure

1. Access the **Product Directory**.
2. Select a managed product from the Product Directory tree.
3. Click **Tasks** from the **Product Directory** menu.
4. From the list of tasks, select **Deploy license profiles**.

5. On the **License Profiles** screen, click the **Deploy Now** link to make Control Manager load updated license information from the Trend Micro license server. Control Manager then deploys the license profiles automatically.
6. Click the **Command Details** link to open the **Command Details** screen, where you can review when Control Manager deployed the license profiles, the time of the last report, the user who authorized the deployment, and a breakdown of deployments in progress and successfully or unsuccessfully completed. You can also see a list of deployments by server.

About Activating Control Manager

Activating Control Manager allows you to use all of the product features, including downloading updated program components. You can activate Control Manager after obtaining an Activation Code from your product package or by purchasing one through a Trend Micro reseller.

**Note**

After activating Control Manager, log off and then log on to the Control Manager web console for changes to take effect.

Understanding License Information

The **License Information** screen displays product information for Control Manager and Control Manager managed services.

Each section contains the following information:

TABLE 15-1. The License Information Screen

SCREEN COMPONENT	DESCRIPTION
Product	Displays the number of managed products to which the Activation Code deploys.

SCREEN COMPONENT	DESCRIPTION
Version	Displays the type of the Activation Code: • Full: Allows full use of the product for the maintenance period (typically 1 year) • Trial: Allows full use of the product for the evaluation period (typically 3 months)
Status	Displays the status of the Activation Code: • Activated • Expired
Activation Code	Displays the Activation Code for the managed product.
Expiration Date	Displays the date the Activation Code expires.

Activating Control Manager

Procedure

1. Navigate to **Administration > License Management > Control Manager**.

The **License Information** screen appears.

License Information

Status

 **Maintenance expires of Control Manager on 6/30/2012.**
 There are 61 day(s) left before maintenance expires.

 **Maintenance expires of Outbreak Prevention Services on 6/30/2012.**
 There are 61 day(s) left before maintenance expires.

Control Manager License Information	
Product:	Control Manager (Advanced)
Version:	Full
Status:	Activated
Activation Code:	(Specify a new Activation Code.)
Expiration date:	6/30/2012
Check Status	View license information online

Outbreak Prevention Services License Information	
Product:	Outbreak Prevention Services
Version:	Full
Status:	Activated
Activation Code:	(Specify a new Activation Code.)

- Click the **Specify a new Activation Code** link.
- In the **New** box, type your Activation Code. If you do not have an Activation Code, click the **Register online** link and follow the instructions on the Online Registration website to obtain one.

4. Click **Activate**, and then click **OK**.
-

Renewing Maintenance for Control Manager or Managed Service

Renew maintenance for Control Manager or its integrated related products and services (Outbreak Prevention Services) using one of the following methods.

Make sure you already have obtained an updated Registration Key to acquire a new Activation Code to renew your product or service maintenance.

Renewing Maintenance Using Check Status Online

Procedure

1. Navigate to **Administration > License Management > Control Manager**.
The **License Information** screen appears.
 2. On the working area under the product or service to renew, click **Check Status**.
 3. Click **OK**.
 4. Log off and then log on to the web console for changes to take effect.
-

Renewing Maintenance by Manually Entering an Updated Activation Code

Procedure

1. Navigate to **Administration > License Management > Control Manager**.
The **License Information** screen appears.
2. On the working area under the product or service to renew, click the **Specify a new Activation Code** link (to obtain an Activation Code, click the Register online link, and follow the instructions on the Online Registration website).

3. In the **New** box, type your Activation Code.
 4. Click **Activate**.
 5. Click **OK**.
 6. Log off and then log on to the web console for changes to take effect.
-

Chapter 16

Managing Child Servers

This chapter presents material administrators will need when managing the Control Manager network. For information on the cascading management structure, see *Understanding Cascading Management on page 5-9* for details.

This chapter contains the following topics:

- *Understanding Parent-Child Communication on page 16-2*
- *Registering or Unregistering Child Servers on page 16-3*
- *Accessing the Cascading Folder on page 16-7*
- *Viewing Child Server Status Summaries on page 16-7*
- *Configuring Log Upload Settings on page 16-8*
- *Issuing Tasks to Child Servers on page 16-10*
- *Viewing Child Server Reports on page 16-12*
- *Renaming a Child Server on page 16-13*
- *Removing Child Servers Accidentally Removed from the Cascading Manager on page 16-14*

Understanding Parent-Child Communication

The Product Directory enumerates the parent server and all child servers in a Control Manager network.

The following table describes the connection status in a Control Manager cascading tree:

TABLE 16-1. Parent and Child Server Relationship

ACTION	PARENT	PARENT	PARENT	PARENT	STAND-ALONE SERVER
					
	CHILD	CHILD	CHILD	CHILD	
					
Direct unregistration	●				
Registration					●
Uninstall Control Manager (save the database)	●	●	●	●	●
Uninstall Control Manager (delete the database)	●	●	●	●	●

Based on the table:

- Direct unregistration of a disabled child server is not allowed
- Direct or forced unregistration of an active child server retains the child server record in the parent server database and removes the child server record in the child server database
- If you uninstall the Control Manager application on a disabled child server, save the Control Manager database, reinstall Control Manager, and then re-register it to the same parent server, the child server status will remain the same—disabled
- If you uninstall the Control Manager application on a disabled child server, delete the Control Manager database, reinstall Control Manager, and then re-register it to the same parent server, the child server status will become active

In addition, the table highlights the following parent and child server relationship when the cascading relationship is set to enable:

- The parent server:
 - Polls each child servers to update the Status Summary screen in real time
 - Updates a child server connection status every 60 minutes
- The child server:
 - Sends logs to the parent server
 - Sends new or updated report profiles

Disabling a child server does not permanently cut the connection between the two Control Manager servers. The parent and child server connection is still present. The parent server issues a single command to the child server — Enable Cascading Control Manager. Once the child server receives and accepts this command, the parent server resumes managing the child server.

Registering or Unregistering Child Servers

The action to register or unregister child servers does not generate the same result as to enable or disable child servers. Unregistering a child server permanently cuts the parent and child server connection. Disabling a child server temporarily suspends the connection and maintains the heartbeat connection between the parent and child servers.

For example, if you registered child server XYZ to parent server A. Then unregistered XYZ from parent server A and registered it to parent server B. Parent server B manages XYZ. A's Product Directory tree removes XYZ from the list.


Use the **Parent Control Manager Settings** screen to register or unregister from a Control Manager parent server.

Registering a Child Server

Procedure

1. Navigate to **Administration > Settings > Parent Control Manager Settings**.

The **Parent Control Manager Settings** screen appears.

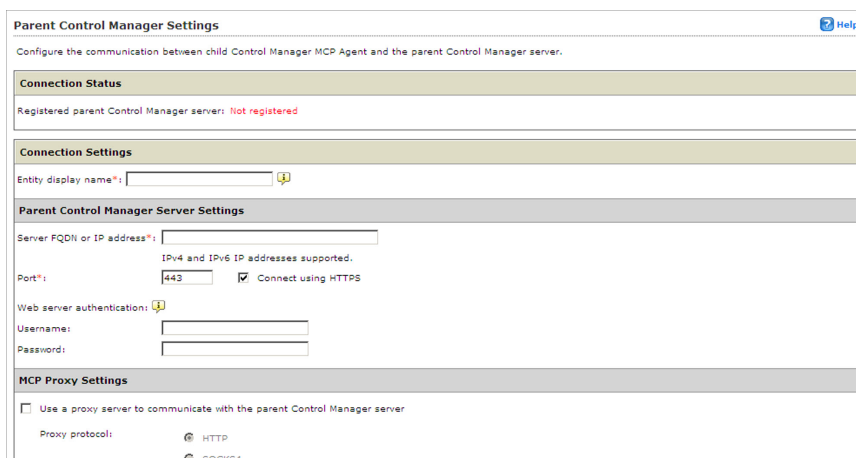

Parent Control Manager Settings [Help](#)

Configure the communication between child Control Manager MCP Agent and the parent Control Manager server.

Connection Status

Registered parent Control Manager server: **Not registered**

Connection Settings

Entity display name:

Parent Control Manager Server Settings

Server FQDN or IP address*:

IPv4 and IPv6 IP addresses supported.

Port*: ☒ Connect using HTTPS

Web server authentication:

Username:

Password:

MCP Proxy Settings

☐ Use a proxy server to communicate with the parent Control Manager server

Proxy protocol: ☒ HTTP ☐ SOCKS4

2. Configure Connection Settings:
 - Type the name the child server displays in the parent Control Manager in the **Entity display name** field.
3. Configure Parent Control Manager Server Settings:
 - a. Type the FQDN or IP address for the parent Control Manager server in the **Server FQDN or IP address** field.
 - b. Type the port number the parent Control Manager uses to communicate with MCP agents in the **Port** field.



Note

For increased security, select **Connect using HTTPS**.

- c. If the IIS Web server of Control Manager requires authentication, type the user name and password.
4. Configure MCP Proxy Settings:
 - a. If you will use a proxy server to connect to the Control Manager server, select **Use a proxy server to communicate with the Control Manager server**.
 - b. Select the protocol the proxy uses:
 - HTTP
 - SOCKS 4
 - SOCKS 5
 - c. Type the proxy server's FQDN or IP address in the **Server name or IP address** field.
 - d. Type the proxy server port number in the **Port** field.
 - e. If the proxy server requires user authentication, type the user name and password.
5. Configure Two-way Communication Port Forwarding:
 - a. If you will use port forwarding with MCP agents, select **Enable two-way communication port forwarding**.
 - b. Type the forwarding IP address in the **IP address** field.
 - c. Type the port number in the **Port** field.
6. To verify the child server can connect to the parent Control Manager server, click **Test Connection**.
7. Click **Register** to connect to the parent Control Manager server.

**Note**

If you change any of the settings on this screen after registration, click **Update Settings** to notify the Control Manager server of the changes. If you no longer want the Control Manager server to manage the server, click **Unregister** anytime.

Checking the Status in the Control Manager Web Console

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Check the **Cascading Folder** for newly registered Control Manager child servers.
-

Unregistering a Child Server

The action to register or unregister child servers does not generate the same result as to enable or disable child servers. Unregistering a child server permanently cuts the parent and child server connection. Disabling a child server temporarily suspends the connection and maintains the heartbeat connection between the parent and child servers.

When you want to balance the server load between servers a and b, these are the common scenarios:

- Parent server A is managing more child servers than parent server B
- Parent server A becomes overloaded and you want to reduce the load and transfer some child servers to parent server B

Use the **Parent Control Manager Settings** screen to unregister a child server from a parent server.

Procedure

1. Navigate to **Administration > Settings > Parent Control Manager Settings**.

The **Parent Control Manager Settings** screen appears.

2. Click **Unregister** at the bottom of the screen.
-

Accessing the Cascading Folder

Use the Product Directory to view and access functions for child servers.



Note

You can access the Cascading Folder only through the parent server web console.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Expand the **Cascading Folder** in the Product Directory.
-

Viewing Child Server Status Summaries

The **Product Directory** screen displays the Antivirus, Spyware/Grayware, Content Security, Web Security, and Network Virus summaries for all managed products. By default, a week's worth of summaries displays. You can change the scope to Today, Last Week, Last Two Weeks, or Last Month available in the **Display summary for** list.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Select a child server.

All child servers send status summaries to the parent server. The timing is based on the time interval setting in `SystemConfiguration.xml` file.

The default time interval is 3 minutes and the start time is 12:00 am. Configure these values to suit your management needs. All child servers send status summaries to the parent server. The timing is based on the time interval setting in `SystemConfiguration.xml` file.

**Note**

A child server uploads status summaries to the parent server when either 2,500 records is reached or 3 minutes elapses. During the time when the child server has not yet uploaded new logs to the parent server, the Outdated, Current, and Total managed product information in the Component Status table of the child server Product Status screen may not be current.

Configuring Log Upload Settings

Use the child server Configuration tab to set the schedule as to when the child server sends logs to the parent server.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Select a child server from the Product Directory.

The item highlights.

3. Move the cursor over **Configure** from the **Product Directory** menu.

A drop-down menu appears.

4. Click **Schedule child Control Manager server log uploads**.

5. Under **Log Upload**, select **Upload child Control Manager server logs to the parent server**.

6. Set the upload schedule.

- **Upload logs as soon as they are available**

Select this option to instruct the child server to immediately send logs to the parent server.



Note

Selecting **Upload logs immediately** will prompt the child server to constantly send logs to the parent server, affecting network traffic.

- **Schedule log upload to upload logs at a specific schedule**

- a. Set the **Frequency**: Daily or Weekly.
- b. Set the **Start time** by selecting the hour and minutes from the list. By default, the Start time is 20:00.

7. Select **Set the maximum upload time: hours** and set the maximum upload time, which determines the length of time that the child server will upload logs to the parent server.

The default maximum upload time is 8 hours.

8. Click **Save**.



Note

Trend Micro recommends that you schedule the log upload with **Frequency = Daily** and **Start Time = after office hours or during off-peak hours** to prevent heavy network traffic during business hours. However, when the child server has not yet uploaded new logs to the parent server, the Component Status table of the child server's **Product Status** screen may not show current Outdated, Current, and Total managed product information.

Enabling or Disabling Child Server Connection

Use the **Configuration** menu item to enable or disable child server connection to the parent server.

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Select a child server from the Product Directory.

The item highlights.

3. Move the cursor over **Configure** from the **Product Directory** menu.

A drop-down menu appears.

4. Click the **Enable or Disable a child server connection** link.

5. On the working area, do one of the following:

- Select **Enable a connection to this child Control Manager server** to enable a disabled child server
- Select **Disable the connection to this child Control Manager server** to disable an enabled child server



WARNING!

Use care when disabling a child server connection. Managed products information registered to a disabled child server does not automatically upload to the parent server after you re-enable the child server connection. Restart the Trend Micro Control Manager service after enabling a child server to upload new managed product information to the parent server.

6. Click **Apply**.
-

Issuing Tasks to Child Servers

Use the Tasks menu item to perform any of the following actions to specific or all child servers.

- Deploy Anti-spam rules

- Deploy engines
- Deploy pattern files/cleanup templates
- Deploy program files

Procedure

1. Click **Directories > Products** from the main menu.

The **Product Directory** screen appears.

2. Select a child server from the Product Directory.

3. Perform one of the following:

- Issue a task to the child server
 - a. Move the cursor over **Tasks** from the **Product Directory** menu.

A drop-down menu appears.

- b. Click any of the available tasks.
- c. Click **Deploy now**.

A confirmation screen appears once Control Manager has completed the task.

- d. Click the **Command Details** link at the response screen to view command information, or click **OK**.

- Access the child server's web console

- a. Move the cursor over **Configure** from the **Product Directory** menu.

A drop-down menu appears.

- b. Click **Child Control Manager Single Sign On**.

The child server's web console appears in a new window.

- c. Log on to the child server and complete the required tasks.

Viewing Child Server Reports

Use the **Tasks > Reports** menu item to view a child server's existing report profiles for Static templates.

To view reports generated using Custom templates, using single sign-on, log on to the child Control Manager web console.

Procedure

1. Navigate to the **Product Directory** screen.
2. Select a child server from the Product Directory.

The item highlights.

3. Move the cursor over **Tasks** from the **Product Directory** menu.

A drop-down menu appears.

4. Select **Reports** from the drop-down menu.

The **Reports** screen appears in the working area.



Note

When multiple reports are available on the **Reports** screen, sort reports according to Report Profile or Last Created date.

5. Under Available Reports, click the **View** link of the report profile that you want to open.
6. On the Available Reports for {profile name}, sort reports according to **Submission Time** or **Stage Completion Time**.
7. Under the **Status** column, click **View Child Control Manager Report**.

A new browser window opens that displays the reports content.

Refreshing the Product Directory

Procedure

- On the **Product Directory** screen, click the **Refresh** icon on the upper right corner of the screen.
-

Renaming a Child Server

Use the rename option to change a child server's entity display name.

Procedure

1. Click **Directories > Products** from the main menu.
The **Product Directory** screen appears.
 2. Click **Directory Management** from the **Product Directory** menu.
The **Directory Management** screen appears.
 3. Select the child server to rename.
 4. Click **Rename**.
The **Rename Directory** screen appears.
 5. Type a name for the child server in the **Directory name** field.
 6. Click **Save**.
A confirmation screen appears.
 7. Click **OK**.
The child server displays in the Product Directory with the new name.
-

Removing Child Servers Accidentally Removed from the Cascading Manager

If you accidentally remove a child server from the Product Directory, you need to unregister and then re-register the child server to the parent server.

Chapter 17

Policy Management

This chapter contains information about how to perform policy management on managed products and endpoints.

The chapter contains the following topics:

- *Understanding Policy Management on page 17-2*
- *Understanding Managed Servers on page 6-2*
- *Updating the Policy Templates on page 17-18*
- *Data Identifier Types on page 17-20*
- *Data Loss Prevention Templates on page 17-33*

Understanding Policy Management

Policy management allows administrators to enforce product settings on managed products and endpoints from a single management console. Administrators create a policy by selecting the targets and configuring a list of product settings.

A policy consists of the following items:

- Policy name
- Targets

Administrators can manually select targets or use a filter to automatically assign targets to their policies. The target selection method determines the policy type and how the policy works. See [Understanding Policy Types on page 17-4](#) for more information about policy types.

To include a managed product or endpoint as the target, make sure the product version of the managed product or endpoint supports policy management in Control Manager. The **Policy Template Settings** screen contains information about supported product versions.

- Settings

Once Control Manager deploys a policy to the targets, the settings defined in the policy overwrite the existing settings in the targets. Control Manager enforces the policy settings in the targets every 24 hours. Although local administrators can make changes to the settings from the managed product console, the changes are overwritten every time Control Manager enforces the policy settings.

**Note**

- Since policy enforcement only occurs every 24 hours, the product settings in the targets may not align with the policy settings if local administrators make changes through the managed product console between the enforcement period.
 - Policy settings deployed to IMSVA servers take priority over the existing settings on the target servers instead of overwriting them. IMSVA servers save these policy settings on the top of the list.
 - If an OfficeScan client assigned with a Control Manager policy has been moved to another OfficeScan domain, the client settings will temporarily change to the ones defined by that OfficeScan domain. Once Control Manager enforces the policy again, the client settings will comply with the policy settings.
-

For certain product settings, Control Manager needs to obtain specific setting options from the managed products. If administrators select multiple targets for a policy, Control Manager can only obtain the setting options from the first selected target. To ensure a successful policy deployment, make sure the product settings are synchronized across the targets.

Administrators can use the **Policy Management** screen to perform the following tasks:

- *[Creating a Policy on page 17-8](#)*
 - *[Editing a Policy on page 17-15](#)*
 - *[Deleting a Policy on page 17-16](#)*
 - *[Copying Policy Settings on page 17-14](#)*
 - *[Reordering the Policy List on page 17-17](#)*
-

**Note**

To perform policy management on a new managed product or endpoint, move the managed product from the New Entity folder to another folder in the Product Directory.

Understanding Policy Types

Control Manager provides three types of policies administrators can create. Each policy type differs in the target selection method, which affects how a policy works. The policy list arranges the policy types in the order as described in the following table.

TABLE 17-1. Policy Types

POLICY TYPE	DESCRIPTION
Specified	• Uses the search or browse function to locate specific targets and manually assigns them to the policy • Useful when administrators plan to deploy specific settings only to a certain targets • Remains static on the top of the policy list and takes priority over any filtered policies
Filtered	• Uses a filter to automatically assign current and future targets to the policy • Useful for deploying standard settings to a group of targets • Administrators can change the priority of filtered policies in the policy list • See Assigning Endpoints to Filtered Policies on page 17-5 for more information on how Control Manager assign targets to filtered policies  Note • When an administrator reorders the policy list, Control Manager re-assigns the targets to different filtered policies based on the target criteria and the user roles of each policy creator. • The filtered policy type is only available for managingOfficeScan settings.
Draft	Allows administrators to save policy settings as a draft without selecting any targets. Control Manager saves draft policies with the lowest priority at the bottom of the list.

Assigning Endpoints to Filtered Policies

When a new endpoint registers to Control Manager, it goes through the filtered policies in the list in descending order. Control Manager assigns the new endpoint to a filtered policy when the following conditions are both satisfied:

- The new endpoint matches the target criteria in the policy
- The policy creator has the permission to manage the new endpoint

The same action applies to an endpoint already assigned to a policy, but the policy creator later deletes the policy.

**Note**

For endpoints just registered to Control Manager and for those just released from deleted policies, there is a three-minute grace period during which no endpoint allocation occurs. These endpoints are temporarily without policies during this period.

If an endpoint does not meet the target criteria in any filtered policies, the endpoint does not associate with any policies. Control Manager allocates these endpoints again when the following actions occur:

- Create a new filtered policy
- Edit a filtered policy
- Reorder the filtered policies
- Daily endpoint allocation schedule

Control Manager uses a daily endpoint allocation schedule to ensure that endpoints are assigned to the correct policies. This action occurs once at 3:15 pm every day. When endpoint properties change, such as the operating system or IP address, these endpoints require the daily schedule to re-assign them to the correct policies.

**Note**

If the endpoints are offline during the daily endpoint allocation schedule, the policy status for these endpoints will remain pending until they go online.

When the above actions occur, Control Manager allocate endpoints based on the following conditions:

TABLE 17-2. Endpoint Allocation for Filtered Policies

	New endpoints or endpoints from deleted policies	Endpoints without policies	Endpoints with policies
Create a new policy		●	
Edit a policy	●	●	●
Reorder the filtered policies	●	●	●
Daily endpoint allocation schedule	●	●	●

Understanding the Policy List

The policy list displays the information and status of policies created by all users. When a new endpoint registers to Control Manager, it goes through the filtered policies in the list in descending order. Control Manager assigns the new endpoint to a filtered policy when the following conditions are both satisfied:

- The new endpoint matches the target criteria of the policy
- The policy creator has the permission to manage the new endpoint

The following table describes the items in the policy list.

TABLE 17-3. Policy List

MENU ITEM	DESCRIPTION
Priority	Displays the priority of the policies. - Control Manager lists policies from the highest to the lowest priority. - When administrators create a filtered policy, Control Manager saves the new policy as the lowest priority policy. - A specified policy takes priority over any filtered policies and remains on the top of the list. Administrators cannot reorder specified policies. - Control Manager places draft policies at the bottom of the list.
Policy	Displays the name of the policy.
Targets	Displays how administrators select targets for the policy. Specified: Uses the browse or search function to select specific targets for the policy. Specified policies remain static on the top of the policy list and take priority over filtered policies. Filtered: Uses a filter to automatically assign current and future endpoints to the policy. Administrators can rearrange the priority of filtered policies. None: The policy creator saved the policy as a draft without selecting any targets.
Deployed	Displays the number of targets that have applied the policy settings.
Pending	Displays the number of targets that have not applied the policy settings. Click the pending number to check the policy status.
Creator	Displays the user who created the policy.
Endpoints/Products without policies	Displays the number of managed products or endpoints to which Control Manager has not assigned a policy.
Total endpoints/products	Displays the number of managed products or endpoints available for policy management.

**Note**

The numbers in Deployed, Pending, Endpoints/Products without policies, and Total endpoints/products only reflect the endpoints or managed products an administrator has the permissions to manage.

Creating a Policy

Procedure

1. Navigate to **Policies > Policy Management**.

The **Policy Management** screen appears.

Priority	Policy	Targets	Deployed	Pending	Creator
1	Standard	Filtered	0	0	root
2	Standard 2	Filtered	0	0	root
	AA	None	0	0	root

Endpoints/Product without policies: 0

Total endpoints/products: 0

2. Select the type of product settings from the **Product** list.

The screen refreshes to display policies created for the selected managed product.

3. Click **Create**.

The **Create Policy** screen appears.

4. In the **Policy Name** field, type a name for the policy.
5. In the **Targets** section, select a method to assign targets to the policy.
 - **None (Draft only):** Use this option to save the policy as a draft without choosing any targets.
 - **Filter by Criteria:** Use this option to allocate endpoints automatically based on the filtering criteria. For details, see [Filtering by Criteria on page 17-10](#).



Note

This option is only available for OfficeScan settings.

- **Specify Targets:** Use this option to select specific endpoints or managed products. For details, see [Specifying Policy Targets on page 17-11](#).
6. Under **Settings**, click a feature to expand the tab and then configure the settings. Repeat the step to configure all features.
 - For details about configuring each feature, refer to the Control Manager Online Help or the Administrator's Guide of the managed product.
 - For details about setting the permissions to configure settings, see [Changing Setting Permissions on page 17-13](#).

7. Click **Deploy**.

Control Manager immediately starts to deploy the settings to the targets. The policy appears in the list on the **Policy Management** screen.



Note

- After clicking **Deploy**, please wait two minutes for Control Manager to deploy the policy to the targets. Click **Refresh** on the **Policy Management** screen to update the status information in the policy list.
- Control Manager enforces the policy settings on the targets every 24 hours.

Filtering by Criteria



Note

This option is only available for OfficeScan settings.

Procedure

1. Click **Set Filter**.

The **Filter by Criteria** screen appears.

Filter by Criteria

Define a filter to automatically assign current and future targets to the policy.

Match all of the selected criteria:

☐ Match keywords in: Host name

☐ IP addresses: to

☐ Operating systems:

☐ Windows XP	☐ Windows Vista	☐ Windows 7
☐ Windows 2000	☐ Windows 2003	☐ Windows 2008
☐ Others		

☐ Product Directory:
Select a folder from the Product Directory:

2. Select the following options and define the criteria. Control Manager assigns an endpoint to the policy if the target matches all of the selected criteria.

- **Match keywords in:** Define keywords based on the host name or Control Manager display name.
- **IP addresses**

**Note**

- Policy management only supports IPv4 addresses.
 - When a new managed product or endpoint registers to Control Manager, it takes about an hour for the managed product or endpoint to become available for search by IP address.
-

- **Operating systems**
- **Product Directory:** Select a folder from the Product Directory.

3. Click **Save**.

**Note**

Control Manager can only assign endpoints without policies to a new filtered policy. To re-allocate an endpoint already assigned to a filtered policy, move another filtered policy with the matching criteria up the priority list.

Specifying Policy Targets

Procedure

1. Click **Select**.

The **Specify Targets** screen appears.

2. Use **Search** or **Browse** to locate the targets.

- **Search:** Use the following search criteria to find endpoints or managed products. The search results display the endpoints or managed products matching all of the selected criteria.
 - **Match keywords in:** Define keywords based on the host name or Control Manager display name.
 - **IP addresses**

 Note

- Policy management only supports IPv4 addresses.
 - When a new managed product or endpoint registers to Control Manager, it takes about an hour for the managed product or endpoint to become available for search by IP address.
-

- **Operating systems**
- **Browse:** Browse the Product Directory or Active Directory to locate the endpoints or managed products and assign them to the policy.

**Note**

To set up the Active Directory, see *Configuring Active Directory and Endpoint Protection Verification Widget Settings on page 8-10* for details.

3. Select the endpoints or managed products and then click **Add Selected Targets**.
4. Wait for the numbers in **View Action List** and **View Results** to change.
5. Click **OK**.


Changing Setting Permissions

When configuring the policy settings, administrators can grant managed product administrators the permissions to define the settings of certain features. Follow the steps below to change setting permissions when creating or editing a policy:

Procedure

1. In the **Settings** section, click **Show Permissions**.

A switch appears at the right side of each feature.

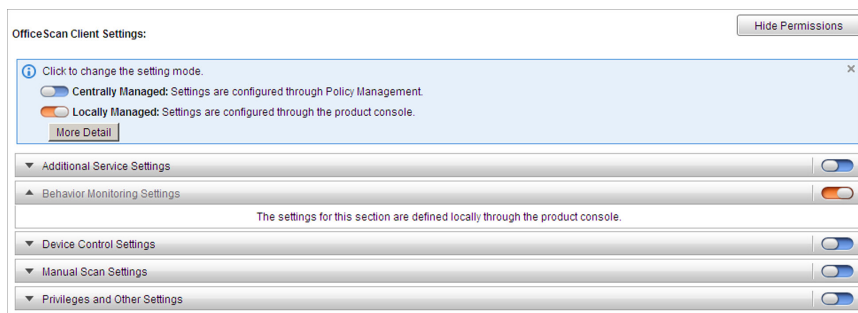

2. Click the switch to change the setting permission.
 - **Centrally Managed** (Blue): The assigned targets will comply to the settings defined in the policy.

- **Locally Managed** (Orange): Control Manager does not deploy the settings of the selected feature to the targets. The managed product administrators can define the settings through the product console.

**Note**

When administrators deploy a policy with all feature settings switched to locally managed, the policy status of the targets will remain in the pending state.

Copying Policy Settings

Administrators can copy the settings from an existing policy, create a new policy with the same settings, and deploy the settings to different endpoints or managed products.

Procedure

1. Navigate to **Policies > Policy Management**.

The **Policy Management** screen appears.

2. Select the type of product settings from the Product list.

The screen refreshes to display policies created for the selected managed product.

3. Select a policy from the list.

4. Click **Copy Settings**.

The **Copy and Create Policy** screen appears.

5. In the **Policy Name** field, type a name for the policy.

6. Assign **Targets** to the policy.

7. Click **Deploy**.

**Note**

- After clicking **Deploy**, please wait two minutes for Control Manager to deploy the policy to the targets. Click **Refresh** on the **Policy Management** screen to update the status information in the policy list.
 - Control Manager enforces the policy settings on the targets every 24 hours.
-

Editing a Policy

Administrators can change the information of a policy including the policy name, targets, and settings. Only the policy creator can modify the policy.

Control Manager supports the following changes:

- Modifying a filtered policy
 - Adding more targets to a specified policy
 - Removing some targets from a specified policy
-

**Note**

Control Manager only allows the policy creators to make changes to their own policies. However, the root account can edit every policy in the list.

Procedure

1. Navigate to **Policies > Policy Management**.

The **Policy Management** screen appears.

2. Select the type of product settings from the **Product** list.

The screen refreshes to display policies created for the selected managed product.

3. Click a policy name in the **Policy** column.

The **Edit Policy** screen appears.

4. Modify the policy.

**Note**

Editing the filtering criteria in a filtered policy can affect target allocation. Control Manager may re-assign some targets to other filtered policies, or add additional targets to the current policy.

5. Click **Deploy.**

The changes apply immediately.

**Note**

- After clicking **Deploy**, please wait two minutes for Control Manager to deploy the policy to the targets. Click **Refresh** on the **Policy Management** screen to update the status information in the policy list.
 - Control Manager enforces the policy settings on the targets every 24 hours.
-

Deleting a Policy

Administrators can remove a policy from the list. Control Manager then re-allocates the targets associated with the deleted policy if the targets match the filtering criteria of another policy. Those without a match become endpoints without policies, and they keep the settings defined by the deleted policy unless a managed product administrator modifies the settings.

**Note**

Control Manager only allows the policy creator to delete his own policies. However, the root account can delete every policy in the list.

Procedure

1. Navigate to **Policies > Policy Management.**

The **Policy Management** screen appears.

2. Select the type of product settings from the **Product list.**

The screen refreshes to display policies created for the selected managed product.

3. Select the policy to delete.

4. Click **Delete**.

A confirmation screen appears.

5. Click **OK**.
-

Reordering the Policy List

Administrators can use the **Reorder** button to change the order of the filtered policies. Rearranging the policy list can affect target allocation. Control Manager may re-assign some targets to different filtered policies.



Note

- Specified policies remain static and always take priority over filtered policies.
 - This function is only available for managing OfficeScan settings.
-

Procedure

1. Navigate to **Policies > Policy Management**.

The **Policy Management** screen appears.

2. Select the type of product settings from the **Product** list.

The screen refreshes to display policies created for the selected managed product.

3. Click **Reorder**.

The **Reorder Policies** screen appears.

Priority	Policy	Assigned Targets	Targets	Creator
1	Standard	0	Filtered	root
2	Standard 2	0	Filtered	root

4. Rearrange the order of the **Priority** column.
5. Click **Save**.



Note

After clicking **Save**, please wait two minutes for Control Manager to re-assign the targets. Click **Refresh** on the **Policy Management** screen to update the status information in the policy list.

Updating the Policy Templates

The **Policy Template Settings** screen lists the following components available for administrators to enable or upgrade:

- Policy Management Framework: The overall policy structure
- Product Support: The setting templates for managed products and endpoints



Note

To check the product versions that support policy management, move the mouse cursor over the information icon in the **Template Version** column.

Procedure

1. Download the latest **Control Manager widget pool and policy templates (for Control Manager 6.0 and later)** component.

A blue notification appears on the top of the **Dashboard** and **Policy Management** screens.

2. Click **Update Now** in the notification box on either of the screens.
3. Click **OK** when the update completes.

The screen refreshes and the logon screen appears.

4. Log on to the web console.
5. Navigate to **Policies > Policy Resources > Policy Template Settings**.

The **Policy Template Settings** screen appears.

6. Click **Update <version number>** in the Policy framework row.
7. To add a new policy template, click **Enable** in the **Action** column.

Administrators can then select the new setting templates from the **Product** list on the **Policy Management** screen.

8. To update an existing template, click **Update <version number>** in the **Action** column.



Note

To see more information about the update, click **Details** in the **Action** column.

Once the update completes, administrators can check the updated features by editing existing policies. Under the **Settings** section, a red message appears next to the new feature title.

Understanding Data Loss Prevention

Data Loss Prevention (DLP) safeguards an organization's confidential and sensitive data—referred to as digital assets—against accidental disclosure and intentional theft. DLP allows you to:

- Identify the digital assets to protect
- Create policies that limit or prevent the transmission of digital assets through common channels, such as email and external devices
- Enforce compliance to established privacy standards

DLP evaluates data against a set of rules defined in policies. Policies determine the data that must be protected from unauthorized transmission and the action that DLP performs when it detects transmission.

Data Identifier Types

Digital assets are files and data that an organization must protect against unauthorized transmission. You can define digital assets using the following data identifiers:

- **Expressions:** Data that has a certain structure. For details, see [Expressions on page 17-21](#).
- **File attributes:** File properties such as file type and file size. For details, see [File Attributes on page 17-25](#).
- **Keywords:** A list of special words or phrases. For details, see [Keywords on page 17-27](#).

**Note**

It is not possible to delete a data identifier that is being used in a DLP template. Delete the template before deleting the data identifier.

Expressions

An expression is data that has a certain structure. For example, credit card numbers typically have 16 digits and appear in the format "nnnn-nnnn-nnnn-nnnn", making them suitable for expression-based detections.

You can use predefined and customized expressions. For details, see *Predefined Expressions on page 17-21* and *Customized Expressions on page 17-22*.

Predefined Expressions

A Trend Micro product comes with a set of predefined expressions. These expressions cannot be modified or deleted.

A Trend Micro product verifies these expressions using pattern matching and mathematical equations. After a Trend Micro product matches potentially sensitive data with an expression, the data may also undergo additional verification checks.

For a complete list of predefined expressions, see <http://docs.trendmicro.com/en-us/enterprise/data-protection-reference-documents.aspx>.

Viewing Settings for Predefined Expressions

**Note**

Predefined expressions cannot be modified or deleted.

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
 2. Click the **Expression** tab.
 3. Click the expression name.
 4. View settings in the screen that opens.
-

Customized Expressions

Create customized expressions if none of the predefined expressions meet your requirements.

Expressions are a powerful string-matching tool. Ensure that you are comfortable with expression syntax before creating expressions. Poorly written expressions can dramatically impact performance.

When creating expressions:

- Refer to the predefined expressions for guidance on how to define valid expressions. For example, if you are creating an expression that includes a date, you can refer to the expressions prefixed with "Date".
- Note that a Trend Micro product follows the expression formats defined in Perl Compatible Regular Expressions (PCRE). For more information on PCRE, visit the following website:

<http://www.pcre.org/>

- Start with simple expressions. Modify the expressions if they are causing false alarms or fine tune them to improve detections.

There are several criteria that you can choose from when creating expressions. An expression must satisfy your chosen criteria before a Trend Micro product subjects it to a DLP policy. For details about the different criteria options, see *Criteria for Customized Expression on page 17-22*.

Criteria for Customized Expression

TABLE 17-4. Criteria Options for Customized Expressions

CRITERIA	RULE	EXAMPLE
None	None	All - Names from US Census Bureau Expression: <code>[^\\w]([A-Z][a-z]{1,12} (\\s?,\\s? [\\s])\\s([A-Z])\\.\\s)([A-Z][a-z]{1,12})[^\\w]</code>

CRITERIA	RULE	EXAMPLE
Specific characters	An expression must include the characters you have specified. In addition, the number of characters in the expression must be within the minimum and maximum limits.	US - ABA Routing Number Expression: <code>[^d]([0123678]d{8})[^d]</code> Characters: 0123456789 Minimum characters: 9 Maximum characters: 9
Suffix	Suffix refers to the last segment of an expression. A suffix must include the characters you have specified and contain a certain number of characters. In addition, the number of characters in the expression must be within the minimum and maximum limits.	All - Home Address Expression: <code>\D(\d+\s[a-z.]+\s([a-z]+\s){0,2}(lane ln street st avenue ave road rd place pl drive dr circle cr court ct boulevard blvd)\.?[0-9a-z,#\s\.]([0,30]([a-z]{2}\s\d{5})(-\d{4})?)?[^d-]</code> Suffix characters: 0123456789- Number of characters: 5 Minimum characters in the expression: 25 Maximum characters in the expression: 80
Single- character separator	An expression must have two segments separated by a character. The character must be 1 byte in length. In addition, the number of characters left of the separator must be within the minimum and maximum limits. The number of characters right of the separator must not exceed the maximum limit.	All - Email Address Expression: <code>[^w.](\w\.){1,20}@[a-z0-9]{2,20}[\.][a-z]{2,5}[a-z\.]{0,10})[^w.]</code> Separator: @ Minimum characters to the left: 3 Maximum characters to the left: 15 Maximum characters to the right: 30

Creating a Customized Expression

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **Expression** tab.
3. Click **Add**.

A new screen displays.

4. Type a name for the expression. The name must not exceed 100 bytes in length and cannot contain the following characters:
 - < * ^ | & ? \ /
5. Type a description that does not exceed 256 bytes in length.
6. Type the expression and specify whether it is case-sensitive.
7. Type the displayed data.

For example, if you are creating an expression for ID numbers, type a sample ID number. This data is used for reference purposes only and will not appear elsewhere in the product.

8. Choose one of the following criteria and configure additional settings for the chosen criteria (see *Criteria for Customized Expression on page 17-22*):
 - None
 - Specific characters
 - Suffix
 - Single-character separator

9. Test the expression against an actual data.

For example, if the expression is for a national ID, type a valid ID number in the **Test data** text box, click **Test**, and then check the result.

10. Click **Save** if you are satisfied with the result.

**Note**

Save the settings only if the testing was successful. An expression that cannot detect any data wastes system resources and may impact performance.

Importing Customized Expressions

Use this option if you have a properly-formatted `.dat` file containing the expressions. You can generate the file by exporting the expressions from either the Trend Micro product server you are currently accessing or from another Trend Micro product server.

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **Expression** tab.
3. Click **Import** and then locate the `.dat` file containing the expressions.
4. Click **Open**.

A message appears, informing you if the import was successful. If an expression to be imported already exists, it will be skipped.

File Attributes

File attributes are specific properties of a file. You can use two file attributes when defining data identifiers, namely, file type and file size. For example, a software development company may want to limit the sharing of the company's software installer to the R&D department, whose members are responsible for the development and testing of the software. In this case, the Trend Micro product administrator can create a policy that blocks the transmission of executable files that are 10 to 40MB in size to all departments except R&D.

By themselves, file attributes are poor identifiers of sensitive files. Continuing the example in this topic, third-party software installers shared by other departments will most likely be blocked. Trend Micro therefore recommends combining file attributes with other DLP data identifiers for a more targeted detection of sensitive files.

For a complete list of supported file types see <http://docs.trendmicro.com/en-us/enterprise/data-protection-reference-documents.aspx>.

Creating a File Attribute List

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **File Attribute** tab.
3. Click **Add**.

A new screen displays.

4. Type a name for the file attribute list. The name must not exceed 100 bytes in length and cannot contain the following characters:
 - > < * ^ | & ? \ /
5. Type a description that does not exceed 256 bytes in length.
6. Select your preferred true file types.
7. If a file type you want to include is not listed, select **File extensions** and then type the file type's extension. A Trend Micro product checks files with the specified extension but does not check their true file types. Guidelines when specifying file extensions:
 - Each extension must start with an asterisk (*), followed by a period (.), and then the extension. The asterisk is a wildcard, which represents a file's actual name. For example, *.pol matches 12345.pol and test.pol.
 - You can include wildcards in extensions. Use a question mark (?) to represent a single character and an asterisk (*) to represent two or more characters. See the following examples:
 - *.m matches the following files: ABC.dem, ABC.prm, ABC.sdc
 - *.m*r matches the following files: ABC.mgdr, ABC.mtp2r, ABC.mdmr
 - *.fm? matches the following files: ABC.fme, ABC.fml, ABC.fmp

- Be careful when adding an asterisk at the end of an extension as this might match parts of a file name and an unrelated extension. For example: *.do* matches abc.doctor_john.jpg and abc.donor12.pdf.
 - Use semicolons (;) to separate file extensions. There is no need to add a space after a semicolon.
8. Type the minimum and maximum file sizes in bytes. Both file sizes must be whole numbers larger than zero.
 9. Click **Save**.
-

Importing a File Attribute List

Use this option if you have a properly-formatted .dat file containing the file attribute lists. You can generate the file by exporting the file attribute lists from either the Trend Micro product server you are currently accessing or from another Trend Micro product server.

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **File Attribute** tab.
3. Click **Import** and then locate the .dat file containing the file attribute lists.
4. Click **Open**.

A message appears, informing you if the import was successful. If a file attribute list to be imported already exists, it will be skipped.

Keywords

Keywords are special words or phrases. You can add related keywords to a keyword list to identify specific types of data. For example, "prognosis", "blood type", "vaccination", and "physician" are keywords that may appear in a medical certificate. If you want to prevent the transmission of medical certificate files, you can use these keywords in a

DLP policy and then configure a Trend Micro product to block files containing these keywords.

Commonly used words can be combined to form meaningful keywords. For example, "end", "read", "if", and "at" can be combined to form keywords found in source codes, such as "END-IF", "END-READ", and "AT END".

You can use predefined and customized keyword lists. For details, see *Predefined Keyword Lists on page 17-28* and *Customized Keyword Lists on page 17-29*.

Predefined Keyword Lists

A Trend Micro product comes with a set of predefined keyword lists. These keyword lists cannot be modified or deleted. Each list has its own built-in conditions that determine if the template should trigger a policy violation.

For details about the predefined keyword lists in a Trend Micro product, see <http://docs.trendmicro.com/en-us/enterprise/data-protection-reference-documents.aspx>.

How Keyword Lists Work

Number of Keywords Condition

Each keyword list contains a condition that requires a certain number of keywords be present in a document before the list will trigger a violation.

The number of keywords condition contains the following values:

- **All:** All of the keywords in the list must be present in the document.
- **Any:** Any one of the keywords in the list must be present in the document.
- **Specific number:** There must be at least the specified number of keywords in the document. If there are more keywords in the document than the number specified, a violation will trigger.

Distance Condition

Some of the lists contain a “distance” condition to determine if a violation is present. “Distance” refers to the amount of characters between the first character of one keyword and the first character of another keyword. Consider the following entry:

First Name:_John_ **Last Name:**_Smith_

The **Forms - First Name, Last Name** list has a “distance” condition of fifty (50) and the commonly used form fields of “First Name” and “Last Name”. In the example above, a violation will trigger as the number of characters between the “F” in First Name and the “L” in Last Name is equal to eighteen (18).

For an example of an entry that would not trigger a violation, consider the following:

The **first name of our new employee from Switzerland is John. His** last name is Smith.

In this example, the number of characters between the “f” in “first name” and the “l” in “last name” is sixty-one (61). This exceeds the distance threshold and does not trigger a violation.

Customized Keyword Lists

Create customized keyword lists if none of the predefined keyword lists meet your requirements.

There are several criteria that you can choose from when configuring a keyword list. A keyword list must satisfy your chosen criteria before a Trend Micro product subjects it to a DLP policy. Choose one of the following criteria for each keyword list:

- **Any keyword**
- **All keywords**
- **All keywords within <x> characters**
- **Combined score for keywords exceeds threshold**

For details regarding the criteria rules, see [Customized Keyword List Criteria on page 17-29](#).

Customized Keyword List Criteria

TABLE 17-5. Criteria for a Keyword List

CRITERIA	RULE
Any keyword	A file must contain at least one keyword in the keyword list.

CRITERIA	RULE
All keywords	A file must contain all the keywords in the keyword list.
All keywords within <x> characters	A file must contain all the keywords in the keyword list. In addition, each keyword pair must be within <x> characters of each other. For example, your 3 keywords are WEB, DISK, and USB and the number of characters you specified is 20. If a Trend Micro product detects all keywords in the order DISK, WEB, and USB, the number of characters from the "D" (in DISK) to the "W" (in WEB) and from the "W" to the "U" (in USB) must be 20 characters or less. The following data matches the criteria: DISK####WEB#####USB The following data does not match the criteria: DISK*****WEB****USB(23 characters between "D" and "W") When deciding on the number of characters, remember that a small number, such as 10, will usually result in faster scanning time but will only cover a relatively small area. This may reduce the likelihood of detecting sensitive data, especially in large files. As the number increases, the area covered also increases but scanning time might be slower.
Combined score for keywords exceeds threshold	A file must contain one or more keywords in the keyword list. If only one keyword was detected, its score must be higher than the threshold. If there are several keywords, their combined score must be higher than the threshold. Assign each keyword a score of 1 to 10. A highly confidential word or phrase, such as "salary increase" for the Human Resources department, should have a relatively high score. Words or phrases that, by themselves, do not carry much weight can have lower scores. Consider the scores that you assigned to the keywords when configuring the threshold. For example, if you have five keywords and three of those keywords are high priority, the threshold can be equal to or lower than the combined score of the three high priority keywords. This means that the detection of these three keywords is enough to treat the file as sensitive.

Creating a Keyword List

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **Keyword** tab.
3. Click **Add**.

A new screen displays.
4. Type a name for the keyword list. The name must not exceed 100 bytes in length and cannot contain the following characters:
 - < * ^ | & ? \ /
5. Type a description that does not exceed 256 bytes in length.
6. Choose one of the following criteria and configure additional settings for the chosen criteria:
 - **Any keyword**
 - **All keywords**
 - **All keywords within <x> characters**
 - **Combined score for keywords exceeds threshold**
7. To manually add keywords to the list:
 - a. Type a keyword that is 3 to 40 bytes in length and specify whether it is case-sensitive.
 - b. Click **Add**.
8. To add keywords by using the "import" option:

**Note**

Use this option if you have a properly-formatted .csv file containing the keywords. You can generate the file by exporting the keywords from either the Trend Micro product server you are currently accessing or from another Trend Micro product server.

- a. Click **Import** and then locate the .csv file containing the keywords.
- b. Click **Open**.

A message appears, informing you if the import was successful. If a keyword to be imported already exists in the list, it will be skipped.

9. To delete keywords, select the keywords and click **Delete**.

10. To export keywords:

**Note**

Use the "export" feature to back up the keywords or to import them to another Trend Micro product server. All keywords in the keyword list will be exported. It is not possible to export individual keywords.

- a. Click **Export**.
- b. Save the resulting .csv file to your preferred location.

11. Click **Save**.

Importing a Keyword List

Use this option if you have a properly-formatted .dat file containing the keyword lists. You can generate the file by exporting the keyword lists from either the Trend Micro product server you are currently accessing or from another Trend Micro product server.

Procedure

1. Navigate to **Policies > Policy Resources > DLP Data Identifiers**.
2. Click the **Keyword** tab.

3. Click **Import** and then locate the .dat file containing the keyword lists.
4. Click **Open**.

A message appears, informing you if the import was successful. If a keyword list to be imported already exists, it will be skipped.

Data Loss Prevention Templates

A DLP template combines DLP data identifiers and logical operators (And, Or, Except) to form condition statements. Only files or data that satisfy a certain condition statement will be subject to a DLP policy.

For example, a file must be a Microsoft Word file (file attribute) AND must contain certain legal terms (keywords) AND must contain ID numbers (expressions) for it to be subject to the "Employment Contracts" policy. This policy allows Human Resources personnel to transmit the file through printing so that the printed copy can be signed by an employee. Transmission through all other possible channels, such as email, is blocked.

You can create your own templates if you have configured DLP data identifiers. You can also use predefined templates. For details, see [Customized DLP Templates on page 17-34](#) and [Predefined DLP Templates on page 17-33](#).



Note

It is not possible to delete a template that is being used in a DLP policy. Remove the template from the policy before deleting it.

Predefined DLP Templates

A Trend Micro product comes with the following set of predefined templates that you can use to comply with various regulatory standards. These templates cannot be modified or deleted.

- **GLBA:** Gramm-Leach-Bliley Act
- **HIPAA:** Health Insurance Portability and Accountability Act

- **PCI-DSS:** Payment Card Industry Data Security Standard
- **SB-1386:** US Senate Bill 1386
- **US PII:** United States Personally Identifiable Information

For a detailed list on the purposes of all predefined templates, and examples of data being protected, see <http://docs.trendmicro.com/en-us/enterprise/data-protection-reference-documents.aspx>.

Customized DLP Templates

Create your own templates if you have configured data identifiers. A template combines data identifiers and logical operators (And, Or, Except) to form condition statements.

For more information and examples on how condition statements and logical operators work, see *Condition Statements and Logical Operators on page 17-34*.

Condition Statements and Logical Operators

A Trend Micro product evaluates condition statements from left to right. Use logical operators carefully when configuring condition statements. Incorrect usage leads to an erroneous condition statement that will likely produce unexpected results.

See the examples in the following table.

TABLE 17-6. Sample Condition Statements

CONDITION STATEMENT	INTERPRETATION AND EXAMPLE
[Data Identifier1] And [Data Identifier 2] Except [Data Identifier 3]	A file must satisfy [Data Identifier 1] and [Data Identifier 2] but not [Data Identifier 3]. For example: A file must be [an Adobe PDF document] and must contain [an email address] but should not contain [all of the keywords in the keyword list].

CONDITION STATEMENT	INTERPRETATION AND EXAMPLE
[Data Identifier 1] Or [Data Identifier 2]	A file must satisfy [Data Identifier 1] or [Data Identifier 2]. For example: A file must be [an Adobe PDF document] or [a Microsoft Word document].
Except [Data Identifier 1]	A file must not satisfy [Data Identifier 1]. For example: A file must not be [a multimedia file].

As the last example in the table illustrates, the first data identifier in the condition statement can have the "Except" operator if a file must not satisfy all of the data identifiers in the statement. In most cases, however, the first data identifier does not have an operator.

Creating a Template

Procedure

1. Navigate to **Policies > Policy Resources > DLP Templates**.
2. Click **Add**.

A new screen displays.
3. Type a name for the template. The name must not exceed 100 bytes in length and cannot contain the following characters:

 - < * ^ | & ? \ /
4. Type a description that does not exceed 256 bytes in length.
5. Select data identifiers and then click the "add" icon.

When selecting definitions:

- Select multiple entries by pressing and holding the **CTRL** key and then selecting the data identifiers.

- Use the search feature if you have a specific definition in mind. You can type the full or partial name of the data identifier.
 - Each template can contain a maximum of 30 data identifiers.
6. To create a new expression, click **Expressions** and then click **Add new expression**. In the screen that appears, configure settings for the expression.
 7. To create a new file attribute list, click **File attributes** and then click **Add new file attribute**. In the screen that appears, configure settings for the file attribute list.
 8. To create a new keyword list, click **Keywords** and then click **Add new keyword**. In the screen that appears, configure settings for the keyword list.
 9. If you selected an expression, type the number of occurrences, which is the number of times an expression must occur before a Trend Micro product subjects it to a DLP policy.
 10. Choose a logical operator for each definition.

**Note**

Use logical operators carefully when configuring condition statements. Incorrect usage leads to an erroneous condition statement that will likely produce unexpected results. For examples of correct usage, see [Condition Statements and Logical Operators on page 17-34](#).

11. To remove a data identifier from the list of selected identifiers, click the trash bin icon.
 12. Below **Preview**, check the condition statement and make changes if this is not your intended statement.
 13. Click **Save**.
-

Importing Templates

Use this option if you have a properly-formatted .dat file containing the templates. You can generate the file by exporting the templates from either the Trend Micro product server you are currently accessing or from another Trend Micro product server.

Procedure

1. Navigate to **Policies > Policy Resources > DLP Templates**.
2. Click **Import** and then locate the .dat file containing the templates.
3. Click **Open**.

A message appears, informing you if the import was successful. If a template to be imported already exists, it will be skipped.

Chapter 18

Investigating Data Loss Prevention Incidents

Control Manager provides the capability for DLP compliance officers and incident reviewers to review and update incident information.

This chapter contains the following topics:

- *Administrator Tasks on page 18-2*
- *DLP Incident Review Process on page 18-7*

Administrator Tasks

To enable the incident review process, Control Manager administrators need to complete some prerequisite tasks. The following table lists the required tasks and references:

TABLE 18-1. Administrator Tasks

TASK	REFERENCES
Set up manager information in Active Directory.	Setting Up Manager Information in Active Directory Users on page 18-3
Set up Active Directory integration to obtain user information.	Configuring Active Directory and Endpoint Protection Verification Widget Settings on page 8-10
Create user accounts specific for DLP incident investigation. Assign DLP Compliance Officer or DLP Incident Reviewer roles to users investigating DLP incidents.  Note The DLP Compliance Officer and DLP Incident Reviewer roles are available to Active Directory users only.	• Understanding DLP User Roles on page 18-5 • Understanding User Roles on page 3-3 • About Adding/Importing User Accounts on page 3-17
Set up the Scheduled incident summary and Incident details updated notifications.	• Configuring Scheduled Incident Summary Settings on page 10-25 • Configuring Incident Details Updated Settings on page 10-26
Export DLP logs for auditing purposes.	• Creating DLP Auditing Logs on page 18-7 • Querying Log Data on page 11-5

Setting Up Manager Information in Active Directory Users

For managers to investigate DLP incidents, set up the manager information in each Active Directory user.

Procedure

1. Open the Active Directory Users and Computers console. Click **Start > Administrative Tools > Active Directory Users and Computers**.

The **Active Directory Users and Computers** console appears.

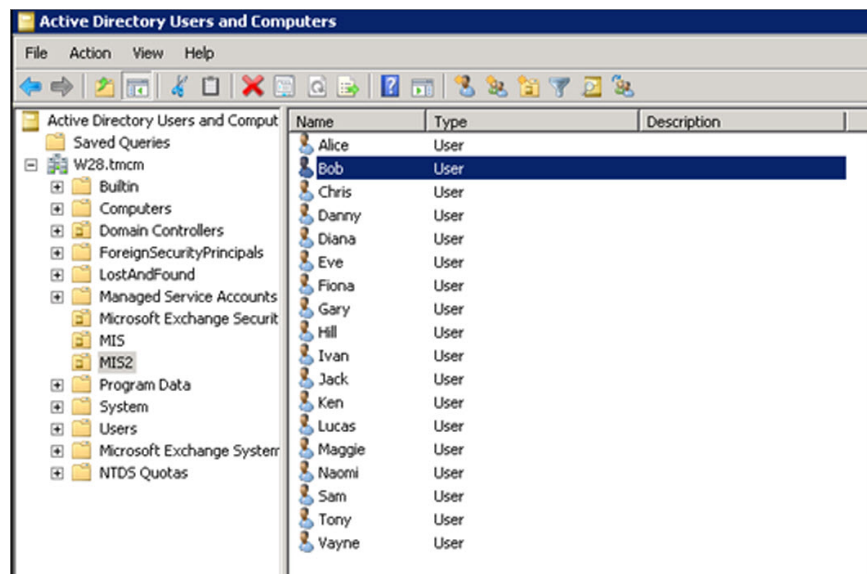


FIGURE 18-1. Active Directory Users and Computers console

2. Double-click a user.

The <user> **Properties** screen appears.

The screenshot shows a Windows-style dialog box titled "Bob Properties". It features a series of tabs at the top: "Published Certificates", "Member Of", "Password Replication", "Dial-in", "Object", "Security", "Environment", "Sessions", "Remote control", "Remote Desktop Services Profile", "Personal Virtual Desktop", "COM+", "Attribute Editor", "General", "Address", "Account", "Profile", "Telephones", and "Organization". The "General" tab is currently selected. Below the tabs, there are several input fields: "Job Title:", "Department:", and "Company:". Below these is a "Manager" section with a "Name:" label and a text box, followed by "Change...", "Properties", and "Clear" buttons. At the bottom of the main content area is a "Direct reports:" label and a large empty rectangular box. At the very bottom of the dialog are "OK", "Cancel", "Apply", and "Help" buttons.

FIGURE 18-2. <user> Properties screen

3. Click the **Organization** tab and then click **Change...**

The **Select User or Contact** screen appears.

FIGURE 18-3. Select User or Contact screen

4. Specify the manager information and click **OK**.
5. To verify the manager-user relationship, open the manager's **<user> Properties** screen, click the **Organization** tab, and check the user information under **Direct reports**.

Understanding DLP User Roles

The DLP Compliance Officer and DLP Incident Reviewer are the only two roles with the permission to review DLP incidents.



Note

The DLP Compliance Officer and DLP Incident Reviewer roles are available to Active Directory users only.

The following table describes the features and characteristics related to these user roles:

TABLE 18-2. DLP Compliance Officer and DLP Incident Reviewer Features

ITEM	DESCRIPTION
DLP logs	Access to DLP logs is strictly limited to the following user roles: - DLP Compliance Officer: - Complete access - Specific widgets display DLP incident information - DLP Incident Reviewer: - Access limited to DLP logs related to directly managed users - Specific widgets display DLP incident information
Incident scope	- DLP Compliance Officer: Views incident data of the entire Active Directory users - DLP Incident Reviewer: Views incident data of directly managed users
Menu access	Dashboard and the widgets listed in the DLP Incident Investigation tab: - DLP Incidents by Severity and Status - DLP Incident Trends by User - DLP Incidents by User See DLP Incident Investigation Tab on page 8-4 for more information.
Scheduled incident summary notification	- Daily or weekly email notification - Summary list of incident count by severity level - Link to the Control Manager web console - Both the DLP Compliance Officer and DLP Incident Reviewer receive this notification
Incident details updated notification	- Notification of modification to incident status or comments - Only the DLP Compliance Officer receives this notification

Creating DLP Auditing Logs

Administrators can use Ad Hoc Query to generate and export DLP auditing logs. Perform a log query as described in [Querying Log Data on page 11-5](#) and configure the following:

- Data scope: **Select Control Manager**
- Data view: Select **User Access Information**
- Query criteria: Add the following activities to Custom criteria:
 - Delete DLP logs
 - Delete access logs
 - Download DLP incident file
 - Enable access log maintenance
 - Enable DLP log maintenance
 - Disable access log maintenance
 - Disable DLP log maintenance
 - Update DLP incident
 - Change DLP log maintenance setting
 - Update access log maintenance settings

DLP Incident Review Process

Once Control Manager administrators have completed the prerequisite tasks, the reviewers can start the incident review process. The following table lists the tasks and references:

TABLE 18-3. DLP Incident Review Process

TASK	DESCRIPTION
Receive the scheduled incident summary notification message	Control Manager summarizes and sends email notifications to the incident reviewers daily or weekly.
Review details about the incident using one of the following methods: - Click the link provided in the message to log on to the Control Manager web console - Open the attachment (if available)	Understanding the Incident Information List on page 18-8
Update the incident status and provide comments	Reviewing Incident Details on page 18-10

Understanding the Incident Information List

The **Incident Information** screen displays a list of incidents manageable for the reviewer. Incident reviewers can use this screen to do the following:

- View incident summary
- Take actions on incidents
- Export incident details

TABLE 18-4. Incident Information List

ITEM	DESCRIPTION
ID	Unique incident ID

ITEM	DESCRIPTION
Received	Date and time when Control Manager received incident data  Note After receiving DLP logs from managed products, Control Manager needs 30 minutes to process the logs before incident reviewers can view the data.
Severity	Severity level of the incident  Note Once Control Manager receives and processes a DLP incident, Control Manager does not update the severity level if changes occur in the managed product.
Policy	Name of the Control Manager policy that triggered the incident  Note For incidents triggering DLP policies created in managed products, this appears as N/A.
User	Name of the user who triggered the incident
Manager	Name of the user's manager
Status	Current status of the incident • New • Under Investigation • Escalated • Closed
Action	Action available for managing the incident

Reviewing Incident Details

By clicking the **Edit** icon in the **Action** column of the **Incident Information** screen, the **Incident Details** screen appears displaying detailed information about the incident. DLP incident reviewers can use this screen to update the incident status and provide comments on the incident.

TABLE 18-5. Incident Details

ITEM	DESCRIPTION
ID	Unique incident ID
Status	Use this to update the review status of the incident. Available options: • New • Under Investigation • Escalated • Closed
Severity	Severity level of the incident  Note Once Control Manager receives and processes a DLP incident, Control Manager does not update the severity level if changes occur in the managed product.
Policy	Name of the Control Manager policy that triggered the incident  Note For incidents triggering DLP policies created in managed products, this appears as N/A.
Rule	Names of the rules from that triggered the incident

ITEM	DESCRIPTION
Received	Date and time when Control Manager received incident data  Note After receiving DLP logs from managed products, Control Manager needs 30 minutes to process the logs before incident reviewers can view the data.
Generated	Date and time the incident occurred in the managed product
User	Name of the user who triggered the incident
Manager	Name of the user's manager
Sender	Source email address
Recipient	Destination email address
Endpoint	Source host name
IP	Source IP address
Template	Names of the templates that triggered the incident
Matched content	Digital assets that triggered the incident
File	Name or link to the file that triggered the incident  Note The file is quarantined in the managed product.
File hash	Hash information of the file
Email subject	Subject of the email message
Channel	Channel through which the transmission occurred
Action	Actions taken on the incident
Comments	User-defined notes about the incident

Chapter 19

Administering the Database

This chapter presents material administrators will need to manage the Control Manager network.

This chapter contains the following topics:

- *Understanding the Control Manager Database on page 19-2*
- *Backing Up db_ControlManager Using osql on page 19-8*
- *Backing Up db_ControlManager Using SQL Server Management Studio on page 19-10*
- *Shrinking db_ControlManager_log.ldf Using SQL Server Management Studio on page 19-14*
- *Shrinking db_ControlManager_Log.LDF Using SQL Commands on page 19-13*

Understanding the Control Manager Database

Control Manager uses the Microsoft SQL Server database (`db_ControlManager.mdf`) to store data included in logs, Communicator schedule, managed product and child server information, user account, network environment, and notification settings.

The Control Manager server establishes the database connection using a System DSN ODBC connection. The Control Manager installation generates this connection as well as the ID and password used to access `db_ControlManager.mdf`. The default ID is `sa`. Control Manager encrypts the password.

To maximize the SQL server security, configure any SQL account used to manage `db_ControlManager` with the following minimum permissions:

- `dbcreator` for the server role
- `db_owner` for the `db_ControlManager` role

A major contributor to database expansion is the eManager managed product. An average eManager log is about 3,000 bytes. For example:

Given a low-volume of email traffic environment (for example, 100 msg per 10-hour per day), if eManager blocks 1,250 messages each day, there would be 1,250 x 3,000 or 3,750,000 bytes per day in the Security Content Violation log.

The required database expansion in this case would be 5MB per day or 150MB per month.

All other Trend Micro products managed by Control Manager would only generate a database growth of approximately a few kilobytes per day per system.

Because the Control Manager database runs on a scalable database — SQL Server, the theoretical limit is whatever the hardware can handle. Trend Micro has tested up to 2,000,000 entries. If the database server performance is overworked or pushed to its limit, the web console may experience connection time-outs.

Understanding the db_ControlManager Tables

To access all tables in the Control Manager database, use a Microsoft Access project (*.adp / *.ade).



Note

Do not use any of the SQL tools to add, delete, or modify records without instructions from Trend Micro Technical Support.

The following tables make up the Control Manager database:

TABLE 19-1. User/Endpoint Directory Tables

DIRECTORY MANAGEMENT TABLES	DESCRIPTION
tb_WebSecurityLog	Stores Web access violation logs from products
tb_SecurityLog	Stores Content violation logs received from ScanMail and InterScan Messaging products
tb_LogGeneral	Stores Net packet scanning logs from network-based products such as Deep Discovery Inspector
tb_LogDataLossPrevention	Stores DLP related logs sent received from products
tb_AV*Log * corresponds to Virus, Event, StatusEngineInfo, and StatusPatternInfo	Stores product logs Virus table stores virus/malware incident logs detected by products. Other tables store the product status log as well as the pattern and engine version, update and deploy time, and unhandled virus counts.
tb_SpywareLog	Stores malicious spyware information detected by product
tb_PersonalFirewallLog	Stores personal firewall detection log from OfficeScan
tb_LogBehaviorMonitor	Stores malicious system behavior incident detected by OfficeScan
tb_Network_Content_Inspection_Engine_Log	Stores blocked C&C server connection attempt logs from OfficeScan

DIRECTORY MANAGEMENT TABLES	DESCRIPTION

TABLE 19-2. Directory Management Tables

DIRECTORY MANAGEMENT TABLES	DESCRIPTION
CDSM_Entity	Stores the managed product information
CDSM_Agent	Stores Communicator information
CDSM_Registry	Stores registry information
CDSM_UserLog	Stores information as to who, which options, and what time a user accesses the web console; this is useful for auditing web console accesses
CDSM_SystemEventlog	Stores system logs generated by internal processes

TABLE 19-3. Server Command Controller Tables

SERVER COMMAND CONTROLLER TABLES	DESCRIPTION
tb_TVCSCommandList	Stores managed product commands
tb_TVCSCommandTaskQueue	Stores commands issued to managed products
tb_CommandTracking	Stores command status
tb_CommandItemTracking	Stores detailed command status
tb_ProcessInfo	Stores MsgReceiver.exe, CmdProcessor.exe, LogReceiver.exe, LogRetriever.exe, and UIProcessor.exe information
tb_LoginUserSessionData	Stores user logon session control
tb_ManualDownload	Stores manual download information
tb_ScheduleDownload	Stores scheduled download information

TABLE 19-4. Managed Product Tables

MANAGED PRODUCT TABLES	DESCRIPTION
tb_EntityInfo	Stores the managed product information
tb_VirtualEntity	Stores TVCS1.x agent registration information

TABLE 19-5. Log Tables

LOG TABLES	DESCRIPTION
tb_TempLog	Stores the raw data of product logs
tb_AV*Log	Stores product log * corresponds to Virus, Event, Status, PEInfo, WebSecurity. These tables store the product status log as well as the pattern and engine version, update and deploy time, and the unhandled virus count.
tb_InvalidLog	Stores unidentified log information
• tb_TotalWebSecurityCount • tb_TotalVirusCount • tb_TotalSecurityCount • tb_TopTenSource • tb_TopTenDestination • tb_TopTenVirus	Stores virus summary information for Status Summary and reports
tb_LogPurgePolicy	Stores purge log settings
tb_LogPurgeCounter	Stores purge log counter

LOG TABLES	DESCRIPTION
• tb_InstanceForVirusOutbreak • tb_InstanceForSpecialVirus • tb_InstanceForVirusOutbreak	Stores log instances used in alert notifications

TABLE 19-6. Notification Tables

NOTIFICATION TABLES	DESCRIPTION
• tb_Alert_NTF_JobList • tb_Event_NTF_JobList	Stores notification queue list
tb_EventNotificationFilter	Stores Event Center configuration
• tb_SendEmailNotification • tb_SendPagerNotification • tb_SendSNMPTrapNotification • tb_SendWindowsNTEventLogNotification	Stores notification method settings
tb_VirusOutBreakPolicy	Stores rules used during virus outbreak
tb_SpecialVirusPolicy	Stores the user specified virus name
• tb_VirusOutbreakAccumulate • tb_SpecialVirusAccumulate	Stores virus counter information

NOTIFICATION TABLES	DESCRIPTION
• tb_UGNtfRelation • tb_NtfUserGROUP • tb_GroupAndUserRelation	Stores user and group notification settings

TABLE 19-7. Report Tables

REPORT TABLES	DESCRIPTION
• tb_ReportScheduleTask • tb_ReportTaskQueue	Stores and handles report generation tasks
tb_ReportItemTracking	Stores report template file catalog

TABLE 19-8. Pattern and Engine Deployment Tables

PATTERN AND ENGINE DEPLOYMENT TABLES	DESCRIPTION
• tb_DeploymentPlans • tb_DeploymentPlansTF	Stores deployment plan information
tb_DeploymentPlanTasks	Stores deployment task queue
tb_DeployNowJobList	Stores ongoing deployment plan status
tb_DeployCommandTracking	Stores deployment command tracking information
tb_DeploymentPlanTargets	Stores the managed product information that applied the deploy command

Backing Up db_ControlManager Using osql

If the Control Manager database is corrupted or non-functional, use a backup copy to restore your settings. When using MSDE, use the MSDE command line interface — `osql`, to generate a database backup.

Procedure

1. From the Control Manager server, click **Start > Run**.
2. Type `cmd` and then click **OK**.
3. On the Command prompt, execute the following commands:

```
osql -U {ID} -P {password} -n -Q "BACKUP DATABASE {Control  
Manager database} TO DISK = '{path and backup name}'"
```

Where:

{ID}: user name of the administrator account used to access the Control Manager database. This is defined during Control Manager setup.

{password}: password used to access the Control Manager database. This is defined during Control Manager setup.


{Control Manager database}: name of the Control Manager database

{path and backup name}: target location and the backup file name

For example:

```
osql -U sa -P -n -Q "BACKUP DATABASE db_ControlManager TO  
DISK = 'f:\db.dat_bak'"
```


A successful database backup produces a result similar to the following:

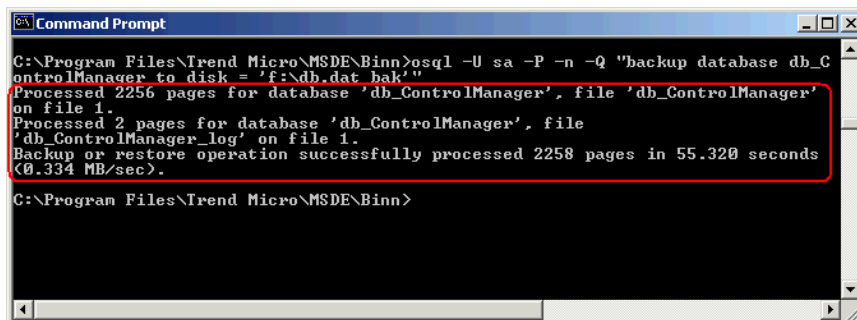

```

C:\Program Files\Trend Micro\MSDE\Binn>osql -U sa -P -n -Q "backup database db_ControlManager to disk = 'f:\db.dat_bak'"
Processed 2256 pages for database 'db_ControlManager', file 'db_ControlManager' on file 1.
Processed 2 pages for database 'db_ControlManager', file 'db_ControlManager_log' on file 1.
Backup or restore operation successfully processed 2258 pages in 55.320 seconds (0.334 MB/sec).

C:\Program Files\Trend Micro\MSDE\Binn>

```

If the backup file `db.dat_bak` already exists, the command `osql` inserts new records into the existing file to back up new information.



Note

Trend Micro recommends backing up the Control Manager database regularly. Always back up when you are about to modify the Control Manager database (for example, installing a managed product).

Restoring Backup db_ControlManager Using osql

Use the MSDE command line interface that comes with your version of MSDE, `<root>:\Program Files\Trend Micro\MSDE\osql`, to restore backup database.

Procedure

1. Stop Control Manager.
2. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
3. Right-click **<Control Manager service>**, and then click **Stop**.
4. Click **Start > Run**.


5. Type cmd and then click **OK**.
6. On the Command prompt, execute the following commands:

```
osql -U {ID} -P {password} -n -Q "RESTORE DATABASE {Control  
Manager database} FROM DISK = '{path and backup name}'"
```

For example:

```
osql -U sa -P -n -Q "RESTORE DATABASE db_ControlManager  
FROM DISK = 'f:\db.dat_bak'"
```

A successful database restoration produces a result similar to the following:

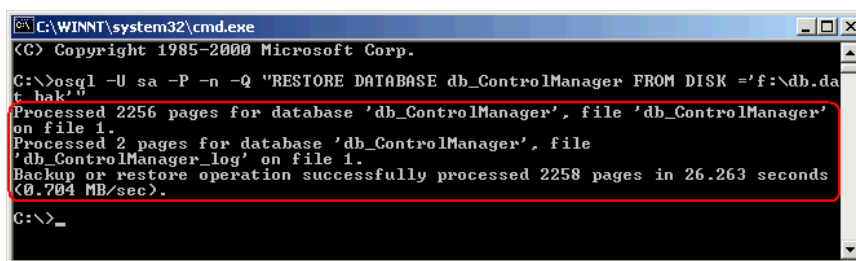

```
C:\WINNT\system32\cmd.exe
(C) Copyright 1985-2000 Microsoft Corp.
C:\>osql -U sa -P -n -Q "RESTORE DATABASE db_ControlManager FROM DISK = 'f:\db.dat_bak'"
Processed 2256 pages for database 'db_ControlManager', file 'db_ControlManager' on file 1.
Processed 2 pages for database 'db_ControlManager', file 'db_ControlManager_log' on file 1.
Backup or restore operation successfully processed 2258 pages in 26.263 seconds (0.704 MB/sec).
C:\>_
```

7. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
8. Right-click **<Control Manager service>**, and then click **Restart**.
9. Start Control Manager.

For more information on how to use osql, refer to the MSDN library.

Backing Up db_ControlManager Using SQL Server Management Studio

When using SQL Server, use the SQL Server Management Studio to back up the Control Manager database.

**Note**

Trend Micro recommends regular backups of the Control Manager database. Always back up when you are about to modify the Control Manager database (for example, adding or installing a managed product).

Procedure

1. From the Control Manager server, click **Start > Programs > Microsoft SQL Server 2005 > Enterprise manager** to access the SQL Server Management Studio.
 2. On the console, click **Microsoft SQL servers > SQL server group > {SQL server} (Windows NT) > Databases**.

{SQL server} is the SQL Server host name.
 3. Right-click **db_ControlManager** and then click **All tasks > Backup Database...**
 4. On the **SQL Server Backup - db_ControlManager**, specify the database name and description.
 5. Under **Backup**, select **Database - complete**.
 6. Under **Destination**, click **Add** to specify the backup file destination.
 7. On **Select Backup Destination**, provide the database backup name and path where it will be saved and then click **OK**.
 8. On the **SQL Server Backup - db_ControlManager**, click **OK** to start the db_ControlManager backup.
 9. Click **OK** when the message “The backup operation has been completed successfully.” appears.
-

Restoring Backup db_ControlManager Using SQL Server Management Studio

Use the SQL Server Management Studio to restore the backup Control Manager database.

Procedure

1. Stop Control Manager.
 2. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
 3. Right-click **<Control Manager service>**, and then click **Stop**.
 4. Click **Programs > Microsoft SQL Server 2005 > SQL Server Management Studio** to access the SQL Server Management Studio.
 5. On the console, click **Microsoft SQL Server 2005 > SQL server group > {SQL server} > Databases**.

{SQL server} is the SQL Server host name.
 6. Right-click **db_ControlManager > All tasks > Restore Database....**
 7. On the **Restore database** screen, select the database to restore.
 8. Click **OK** to start the restoration process.
 9. Click **OK** when the message “Restore of database '{Control Manager database}' completed successfully.” appears.
 10. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
 11. Right-click **<Control Manager service>**, and then click **Restart**.
 12. Start Control Manager.
-

Shrinking db_ControlManager_Log.LDF Using SQL Commands

Procedure

1. Backup the Control Manager database using the SQL Server Management Studio.
2. From the available databases, select the db_ControlManager database.
3. Execute the following SQL Script:

```
DBCC shrinkfile('db_ControlManager_log', 10)
```

4. Verify the size of db_ControlManager_Log.LDF is less than 10MB.

If db_ControlManager_Log.LDF was not reduced in size, use the following SQL command to identify the Database Recovery Mode used:

```
SELECT name as DatabaseName, DATABASEPROPERTYEX(name, 'Recovery') as RecoveryMode
```

If the Database Recovery Mode is FULL, execute following SQL script:

```
-- Truncate the log by changing the database recovery model to SIMPLE
ALTER DATABASE db_ControlManager
SET RECOVERY SIMPLE;
GO
-- Shrink the truncated log file to 10 MB.
DBCC SHRINKFILE (db_ControlManager_Log, 10);
GO
-- Reset the database recovery model.
ALTER DATABASE db_ControlManager
SET RECOVERY FULL;
GO
```

For detailed information on shrinking SQL databases and SQL commands, refer to the *Microsoft SQL Server Administration* documents.

Shrinking db_ControlManager_log.ldf Using SQL Server Management Studio

The transaction log file for the Control Manager database is ...\\data\\db_ControlManager_log.LDF. SQL Server generates the transaction log as part of its normal operation.

db_ControlManager_log.LDF contains all managed product transactions using db_ControlManager.mdf.

By default, the transaction log file has no file size limit on the SQL Server configuration. This leads to filling up the available disk space.

Shrinking the db_ControlManager_log.ldf File Size on Microsoft SQL Server 2008/2005 SP 3/2012

Procedure

1. Back up the Control Manager database using the SQL Server Management Studio.
2. Purge the transaction log.
3. On the SQL Server, click **Programs > Microsoft SQL Server 2008/2005 > SQL Server Management Studio** to open the SQL Server Management Studio.
4. Select the SQL server and specify the Windows authentication if prompted.
5. Right-click **db_ControlManager** and select **Properties**.

The **Properties** dialog box appears.

6. Click **Options**.

The **Options** work area appears.

7. Select **Simple** from the **Recovery model:** list.
8. Click **OK**.

9. Check the `db_ControlManager_log.ldf` file size. It should be 10MB.
-

Shrinking the `db_ControlManager_log.ldf` File Size on Microsoft SQL Server 2005

Procedure

1. Back up the Control Manager database using the SQL Server Management Studio.
2. Purge the transaction log.
3. On the SQL Server, click **Programs > Microsoft SQL Server 2005 > SQL Server Management Studio** to open the SQL Server Management Studio.
4. Select the SQL server and specify the Windows authentication if prompted.
5. On the list, select the **db_ControlManager** database.
6. Copy and paste the following SQL script:

```
DBCC shrinkDatabase(db_ControlManager)
```

```
BACKUP LOG db_ControlManager WITH TRUNCATE_ONLY DBCC  
SHRINKFILE(db_ControlManager_Log, 10)
```




Note

On the `SHRINKFILE(db_ControlManager_Log, 10)` function, the parameter 10 will be the resulting file size of `db_ControlManager_Log.ldf` in megabytes (MB).

7. Click **Execute** to run the SQL script.
 8. Check the `db_ControlManager_log.ldf` file size. It should be 10MB.
-

Part IV

Services and Tools

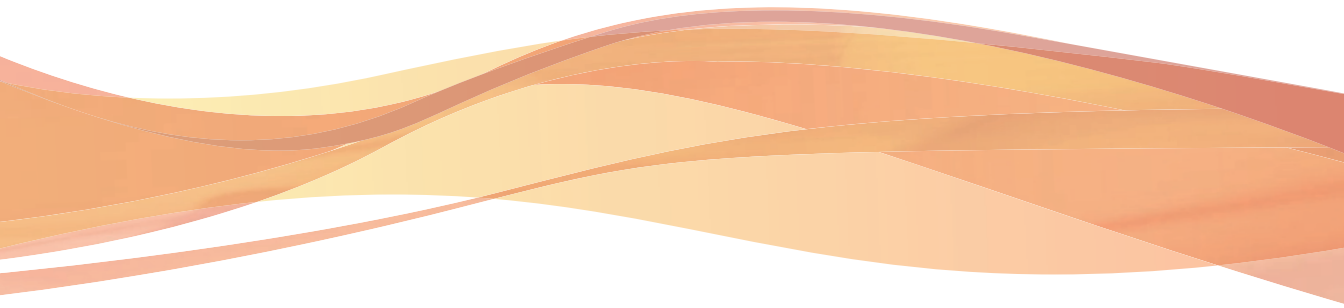

Chapter 20

Using Trend Micro Services

This chapter provides details about the various services available for Control Manager.

This chapter contains the following topics:

- *Understanding Trend Micro Services on page 20-2*
- *Understanding Enterprise Protection Strategy on page 20-3*
- *Understanding Outbreak Prevention Services on page 20-5*
- *Preventing Virus Outbreaks and Understanding Outbreak Prevention Mode on page 20-8*
- *Using Outbreak Prevention Mode on page 20-18*

Understanding Trend Micro Services

Trend Micro recognized that a new approach to antivirus management was needed to significantly reduce the threat and costs of virus attacks. After considerable research and testing, Trend Micro has redefined virus protection (moving beyond reactive, point products to a proactive, centralized protection system that enables a rapid, methodical response to any attack on any system) from Internet gateways to PCs, file servers, and email servers.

The Trend Micro integrated approach to virus protection begins when an administrator sends a virus sample to TrendLabs where a targeted prevention policy (a pre-pattern file recommendation) is created to contain the outbreak and prevent spreading. When Control Manager retrieves this information, system administrators can use Outbreak Prevention Services to quickly understand the scope of the attack and take effective interim steps against it without jeopardizing business productivity by having to shut down a port. They can also quickly disseminate Outbreak Prevention Policy recommendations to other system administrators within the enterprise who may be hit with the same problem.

This proactive response—the ability to incorporate antivirus knowledge throughout the network and have real-time visibility into all virus-related events as they happen—can only be accomplished with central management. The rapid identification services and delivery systems shorten the time to containment, thereby limiting the spread of the virus. This process minimizes the effect of the virus on the productivity of the enterprise, as well as dramatically reducing the costs of cleanup.

Understanding Enterprise Protection Strategy

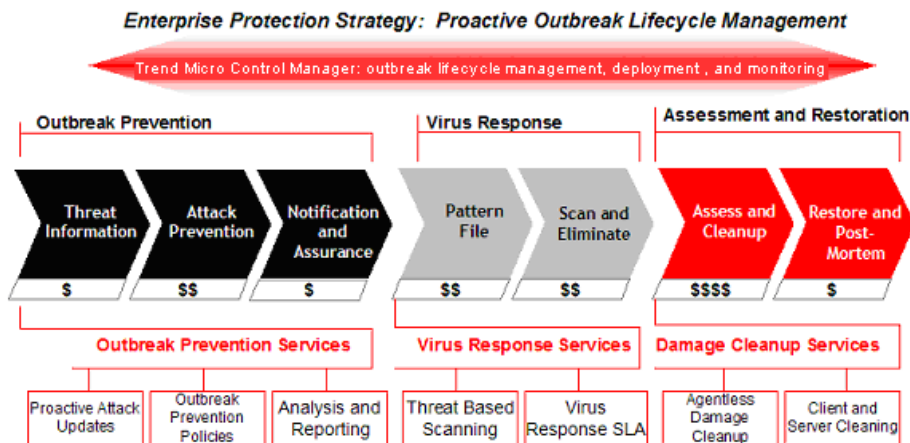


FIGURE 20-1. Enterprise Protection Strategy

Enterprise Protection Strategy (EPS) arms businesses with industry-specific services and support to wage war against mixed-threat attacks with confidence.

- Proactive services combat viruses by containing infiltration and cleaning potential attackers hiding in systems
- Industry's only Virus Response Service Level Agreement guarantees virus detection
- EPS architecture exports Trend Micro's 'think-tank' of antivirus knowledge and support to vulnerable points on the network

EPS establishes a 'command center' to help identify and defend all vulnerabilities within the enterprise.

- Enterprise-wide policy coordination and reporting
- Heterogeneous platform support

EPS provides a battle plan during an attack while minimizing casualties and damage.

- Virus Outbreak Lifecycle approach— industry unique and based on real customer experience
- Enterprise-wide coordination identifies network vulnerabilities and helps enable customers to proactively attack outbreaks
- Focus on the critical stages before and after pattern file deployment manages explosive costs and system damage

Highlighting the Value of EPS

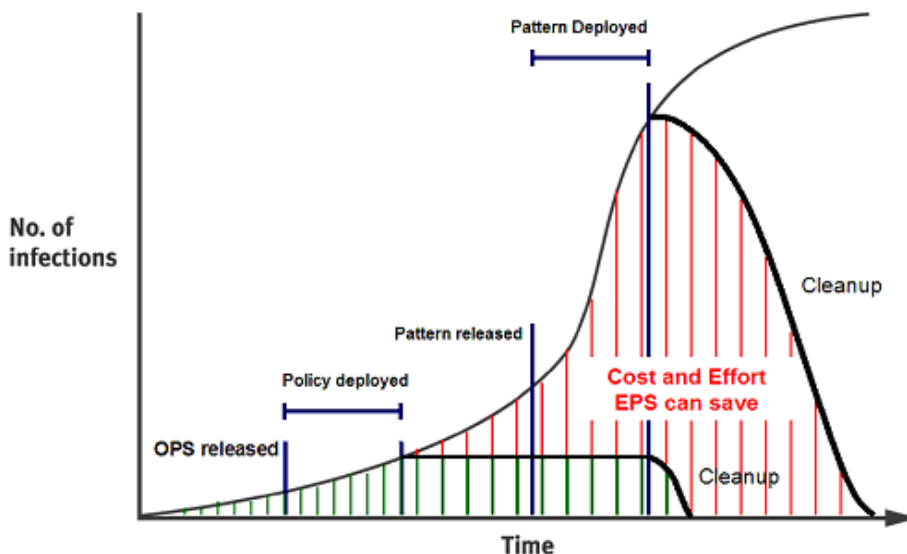


FIGURE 20-2. Cost vs. Effort

The graph demonstrates that putting protection in place as quickly as possible and ridding the network of post-attack vulnerabilities can minimize the devastating effects of outbreaks over time.

By using EPS and Outbreak Prevention Services, enterprises can minimize their risk and dramatically lower costs. By deploying policies early in the life cycle and before pattern file generation, an organization can dramatically reduce the cost and effort (area under the curve), in addition to increasing the overall level of protection.

Trend Micro's expertise, architecture, and services provide a strong return on investment, improve overall protection, and increase the productivity of enterprise networks.

Understanding Outbreak Prevention Services



FIGURE 20-3. Outbreak Prevention Services

The Outbreak Prevention phase refers to the critical period when managed products have identified a virus outbreak, but before a pattern file has become available. During this crucial time, system administrators must endure a chaotic, time-consuming process of communication—often to global and decentralized groups within their organizations.

Outbreak Prevention Services deliver notification of new threats and continuous and comprehensive updates on system status as an attack progresses. The timely delivery of detailed virus data coupled with pre-defined, threat-specific action and scanning policies delivered immediately after a new threat identification allows enterprises to quickly contain viruses and prevent them from spreading.

Additionally, by centrally deploying and managing policy recommendations, Outbreak Prevention Services helps eliminate the potential for miscommunication, applies policies, and deploys critical attack information as it is happening.

By providing automatic or manual download and deployment of policies through Trend Micro Control Manager, Outbreak Prevention Services import knowledge to critical access points on the network directly from experts at TrendLabs, Trend Micro's global security research and support network.

This subscription-based service requires minimal up-front investment and provides enterprise-wide coordination and outbreak management through Trend Micro products which reside across critical points on the network including the Internet gateway, mail server, file server, caching server, client, remote and broadband user.

Benefits of Outbreak Prevention Services

Besides quickening the enterprise's response time, Outbreak Prevention Services can deliver significant operational protection and cost benefits.

TABLE 20-1. Benefits of OPS

BENEFIT	REASONS
Proactive Protection Against Mixed Threat Attacks	• Contains outbreaks without stopping business productivity (that is, shut down ports) • Reduces the chaos associated with defining the threat and behavior • Automatic policy creates a 24x7, no-touch defense system
Expertise and Knowledge	• Recommendations from the experts— policy formulation • Knowledge base of policies for prior viruses
Consistency, Reduced Coordination, Cost Reduction	• Consistent application of policy • Removes logistical challenges of notifying critical parties
Policy and Attack Correlation	• Assurance and reporting = Enterprise-wide visibility and coordination

Activating Outbreak Prevention Services

Before you begin



Important

If you have subscribed to Trend Micro Smart Protection Complete, Outbreak Prevention Services is not supported in Customer Licensing Portal. Please refer to the Smart Protection Complete documentation for information about alternative solutions.

After activating Outbreak Prevention Services, administrators still need to start Outbreak Prevention Mode to protect the network during a virus outbreak.

Procedure

1. Navigate to **Administration > License Management > Control Manager**.
The **License Information** screen appears.
 2. On the working area under **Outbreak Prevention Services License Information**, click the **Activate the product** link.
 3. Do the following:
 - If you do not have an Activation Code, click the **Register online** link and follow the instructions on the Online Registration web site to obtain an Activation Code
 - If you have an Activation Code, in the **New** box, type your Activation Code
 4. Click **Activate**.
-

Viewing Outbreak Prevention Services Status

View the **Outbreak Prevention Services** screen to instantly know the state of the following service status items:

TABLE 20-2. OPS Status

ITEM	DESCRIPTION	STATE
Scheduled policy download	Provides information about whether Control Manager automatically downloads Outbreak Prevention Policies according to a specified schedule.	On/Off
Automatic Outbreak Prevention Mode for red alert	Provides information about whether Control Manager will automatically trigger Outbreak Prevention Mode for red alert viruses.	On/Off
Automatic Outbreak Prevention Mode for yellow alert	Provides information about whether Control Manager will automatically trigger Outbreak Prevention Mode for yellow alert viruses.	On/Off

In addition, this screen also provides an easy way to view the Control Manager components and the version that are currently in use.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Policies**.



Note

This page automatically refreshes to make sure the top threat and status information is current.

Preventing Virus Outbreaks and Understanding Outbreak Prevention Mode

Even before receiving the appropriate pattern file from Trend Micro, an enterprise can deflect, isolate and stem attacks with the help of attack-specific information and Outbreak Prevention Policies from Trend Micro Outbreak Prevention Services. With Outbreak Prevention Services, you can centrally deploy policy recommendations to minimize coordination efforts and help ensure a consistent application of policies throughout the network. Policy recommendations delivered through Outbreak Prevention Services help system administrators respond quickly against new viruses to contain outbreaks, minimize system damage and prevent undue downtime.

Using deployment plans you can restrict the application of Outbreak settings to specific segments of the network if you have divided your network segment into different deployment plans. This approach can prove very useful for large networks composed of several sites. Administrators can apply the settings to only those areas actually affected by the outbreak.

Outbreak Prevention Mode includes the following elements:

- Downloads Outbreak Prevention Policies — a collection of recommended software settings for handling the virus outbreak
- Displays the product settings that will be set, thereby allowing you to modify the settings according to the demands of your network

Outbreak Prevention Services provide recommendations for managed products that must be set.

- Blocks/deflects malicious code from entering or spreading throughout the network
- Customizes Control Manager's notification functions for the outbreak
- Real-time reporting on policy deployment and status
- Ability to approve and deploy policy manually or automatically
- Allows you to set a special, abbreviated, update-download schedule that is only active for the duration of the policy

This enables you to automatically update new virus patterns as soon as they become available.

- Detailed information on threats as soon as they are characterized

Understanding Outbreak Prevention Policies

Apply Outbreak Prevention Policies, collections of product settings, to your managed products using Outbreak Prevention Services. Trend Micro creates these settings in response to virus outbreaks, and provides them to Trend Micro users as part of the Outbreak Prevention Services.

These policies serve as the key to protecting a network during a virus outbreak. They protect critical points on the network, including the Internet gateway, mail server, file server, caching server, client, remote and broadband user. For example, viruses that only propagate through email will only have policies with settings for messaging systems.

The following diagram illustrates how Trend Micro can deploy policies at all layers to protect critical points during a virus outbreak.

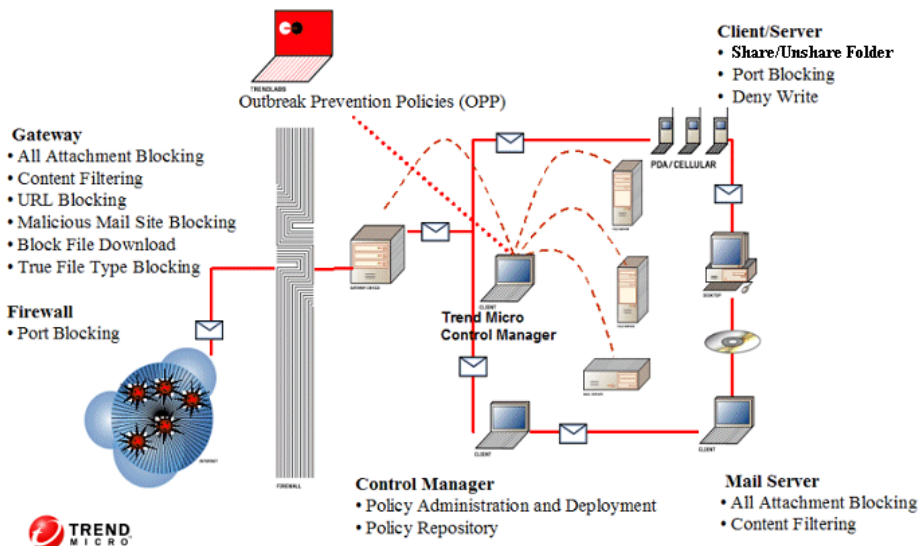


FIGURE 20-4. Deploying OPP

Accessing the Outbreak Prevention Services Settings Screen

- Navigate to **Administration > Outbreak Prevention Services > Settings**. The **Outbreak Prevention Services Settings** screen appears.

This page automatically refreshes to make sure the top threat and status information is current.

Updating Outbreak Prevention Policies

It is important to use the latest Outbreak Prevention Policies to protect your network during virus outbreaks. Update Outbreak Prevention Policies both manually or set a scheduled update.

**Note**

After installing Control Manager for the first time, Trend Micro strongly recommends you perform an Update Now to update your policies immediately. For subsequent updates, use the Scheduled Update function.

Updating Outbreak Prevention Policies Manually

To avoid additional maintenance tasks, schedule Control Manager to automatically check for and download the latest Outbreak Prevention Policies.

**Note**

The **Outbreak Prevention Services** screen automatically refreshes to make sure the top threat and status information is current.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Policies**.
 2. On the working area under **Service Status**, click **Update Now** to download the latest Outbreak Prevention Policies.
 3. Click **OK** after downloading the Outbreak Prevention Policies.
-

Configuring Automatic Updates for Outbreak Prevention Policies

Procedure

1. Navigate to the **Administration > Outbreak Prevention Services > Settings**.
2. Under Scheduled policy download settings, select **Enable scheduled policy update**.
3. From the Download frequency list, choose the number of minutes for Control Manager to check for updated Outbreak Prevention Policies.

4. Under Download source, select the source that contains the latest Outbreak Prevention Policies. Trend Micro ActiveUpdate server is the default option. If you choose another Internet source, type the location in **Other update source**.
 5. Click **Save**.
 6. Click **OK**.
-

Starting Outbreak Prevention Mode

During a virus outbreak, start Outbreak Prevention Mode to deploy attack-specific Outbreak Prevention Policies and minimize the chance of your network becoming infected. Start Outbreak Prevention Mode to counter a single, specific threat.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Policies**.

The **Outbreak Prevention Services** screen appears.

This screen automatically refreshes to make sure the top threat and status information is current.

2. On the working area under **Service Status**, click **Update Now** to download the latest Outbreak Prevention Policies (this is optional if you have already enabled Scheduled Update and are using the latest Outbreak Prevention Policies).
3. Click **OK** after downloading the Outbreak Prevention Policies.
4. Under **Top Threats Around the World**, click the name of the virus that currently presents a threat to your network. By default, Control Manager lists the newest threat first, and the remaining threats in alphabetic order. Each Outbreak Prevention Policy is designed to counter a specific threat.
5. Click **Start Outbreak Prevention Mode**.
6. Under **Outbreak Prevention Policy**, in the Policy in effect for list, choose the number of days that Control Manager continues in Outbreak Prevention Mode.
7. From the Deployment plan list, choose a plan to deploy the Outbreak Prevention Policies to the managed products.

8. Under **Outbreak Prevention Policy Details**, select **Do not block permitted port numbers specified in the Outbreak Prevention settings** to ensure ports defined as exceptions are not blocked.
9. Configure managed product settings or click **Recommended Settings**.
10. Click **Activate**.
11. Click **OK**.

Outbreak Prevention Mode has started and the () icon appears in the management console header.

Editing an Outbreak Prevention Policy

After you have started Outbreak Prevention Mode, modify Outbreak Prevention Policies to suit your network needs. For example, you could:

- Change the duration of the length of Outbreak Prevention Mode
 - Choose a different deployment plan
 - Permit specified port numbers
 - Configure registered managed product settings
-

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Policies**.

The **Outbreak Prevention Services** screen appears.

This page automatically refreshes to make sure the top threat and status information is current.

2. On the working area, click **Edit Policy**.
3. Under Outbreak Prevention Policy, in the Policy in effect for list, choose the number of days that Control Manager continues in Outbreak Prevention Mode.

4. From the Deployment Plan list, choose a plan to deploy the Outbreak Prevention Policies to the managed products (to view/edit or add deployment plans, move the cursor over **Updates**, and then click **Deployment Plan**).
5. Under Outbreak Prevention Policy Details, select **Do not block permitted port numbers specified in the Outbreak Prevention settings** to ensure ports defined as exceptions are not blocked.
6. Configure managed product settings or click **Recommended Settings**.

**Tip**

When you click **Recommended Settings**, the TrendLabs recommended settings are applied and any user-defined settings are removed. If necessary, based on the latest information, these recommendations are updated with each Outbreak Prevention Policy release. Trend Micro recommends you apply the recommended settings.

7. Click **Activate**.

Setting Automatic Outbreak Prevention Mode

Outbreaks can occur anytime. Automatic Outbreak Prevention can automatically deploy Outbreak Prevention Policies for red or yellow alert viruses to managed products and send notifications.

TABLE 20-3. Virus Alert Criteria

VIRUS ALERT	DESCRIPTION
Criteria for Red Alert Viruses	Several infection reports from each business unit reporting rapidly spreading malware, where gateways and email message servers may need to be patched. The industry's first 45-minute Red Alert solution process is started: An official pattern release (OPR) is deployed with notification of its availability, any other relevant notifications are sent out, and fix tools and information regarding vulnerabilities are posted on the download pages.

VIRUS ALERT	DESCRIPTION
Criteria for Yellow Alert Viruses	Infection reports are received from several business units as well as support calls confirming scattered instances. An official pattern release (OPR) is automatically pushed to deployment servers and made available for download. In case of an email-spreading malware, content filtering rules, called Outbreak Prevention Policies (OPP), are sent out to automatically block related attachments on servers equipped with the product functionality.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Settings**.

The **Outbreak Prevention Services Settings** screen appears.

This page automatically refreshes to make sure the top threat and status information is current.

2. Click the **Automatic Outbreak Prevention Mode** tab.
3. Do the following:
 - To set Automatic Outbreak Prevention Mode for red alert viruses, under Red Alert Viruses, select **Enable automatic outbreak prevention**.
 - To set Automatic Outbreak Prevention Mode for yellow alert viruses, under Yellow Alert Viruses, select **Enable automatic outbreak prevention**.
4. From the Prevention duration list, choose the number of days that Outbreak Prevention Mode is active.
5. From the Deployment plan list, choose a plan to deploy the Outbreak Prevention Policies to the managed products.
6. Do the following:
 - Under Excluded products, select managed products that will not receive Outbreak Prevention Policies.

**WARNING!**

These products will not benefit from Outbreak Prevention Services and will have a greater chance of becoming infected during outbreaks.

- Under **Permitted ports**, specify ports that Control Manager will keep open during an outbreak.
- Select **Stop OPP automatically after the prevention duration expires** to automatically stop OPP.

7. Click **Save**.

Configuring Outbreak Prevention Mode Download Settings

Configure how often Control Manager checks for updated Outbreak Prevention Policies during Outbreak Prevention Mode. In addition, you can also choose which deployment plan to use to deploy the updated Outbreak Prevention Policies.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Settings**.

The **Outbreak Prevention Settings** screen appears.

This page automatically refreshes to make sure the top threat and status information is current.

2. Under Outbreak Prevention Mode download settings do the following:
 - In the Download frequency list, choose how often Control Manager checks for updated Outbreak Prevention Policies.
 - In the Components to deploy list, choose a deployment plan to use to deploy downloaded components. For more information about deployment plans, see [Understanding Deployment Plans on page 7-23](#).
 - To deploy the virus pattern file only, select **Exclude Scan Engine Deployment**.

3. Click **Save**.
-

Stopping Outbreak Prevention Mode

Manually stop Outbreak Prevention Mode before the policy duration has been exceeded.

When Control Manager is in Outbreak Prevention Mode, the () icon appears in the web console.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > Policies**.

The **Outbreak Prevention Services** screen appears.

This page automatically refreshes to make sure the top threat and status information is current.

2. Click **Stop Outbreak Prevention Mode**.
 3. Click **OK**.
-

Viewing Outbreak Prevention Mode History

This Outbreak Prevention Services feature allows you to view applied Outbreak Prevention Policies. The **History** screen shows the following information:

TABLE 20-4. History Screen Information

HEADING	DESCRIPTION
#	Indicates the order in which the tasks were performed; a lower the number indicates a newer task
Virus	The virus or malware that caused the outbreak
Started by	The user name of the Control Manager user that applied the policy

HEADING	DESCRIPTION
Outbreak Prevention Mode Duration	Indicates how long Outbreak Prevention Mode was active. The starting time appears on the left, the completion (or abort) time is on the right.
Status	Indicates the results of the task. To view the result or status of a task, click View beside the task.
Report	The number of detected viruses by OPP during the OPS. If no viruses are detected, no data appears under Report.

Procedure

1. Navigate to **Administration > Outbreak Prevention Services > History**.

The **History** screen appears.

2. To view the status of a specific Outbreak Prevention Policy, click **View** in the same row.

The status screen displays the number of viruses detected by your antivirus products.

Using Outbreak Prevention Mode

This tutorial guides you through starting Outbreak Prevention Mode, and is divided into the following topics:

- *Step 1: Identifying the Source of the Outbreak on page 20-19*
- *Step 2: Evaluating Existing Policies on page 20-19*
- *Step 3: Starting Outbreak Prevention Mode on page 20-20*
- *Step 4: Follow-Up Procedures on page 20-23*

Step 1: Identifying the Source of the Outbreak

Trend Micro provides registered customers with services that help identify the threats that threaten their systems. The following warn you of potential or emerging virus or malware outbreaks:

TABLE 20-5. Identifying the Source of the Outbreak

ALERT METHODS	DESCRIPTION
Scheduled Outbreak Prevention Policy downloads	Control Manager can inform you if it downloads Outbreak Prevention Policies that correspond to an ongoing virus outbreak. To receive notification about this event, enable Active Outbreak Prevention Policy received at the Event Center. Upon receiving the notification, start Outbreak Prevention Mode immediately.
Your Technical Account Manager (TAM)	Depending on the support arrangement you have with Trend Micro, your Technical Account Manager will inform you of any outbreak alerts. Upon receipt of the warning, update your outbreak prevention policies.
Trend Micro virus bulletins	You can subscribe to this service at the Trend Micro website.
Special Virus alert	This Control Manager feature, configured at the Event Center, warns you when a Trend Micro product detects an outbreak-causing virus on your network. This allows you to immediately take precautionary measures, such as warning your company's employees about certain kinds of email messages.

Step 2: Evaluating Existing Policies

Upon receiving a virus outbreak warning, assess your system to determine if it is equipped to deal with the threat. On the **Outbreak Prevention Services** screen, examine the Outbreak Prevention Policies currently on your Control Manager server to see if existing policies cover the virus causing the outbreak.

**Tip**

Simplify this evaluation process by enabling Control Manager features that inform you about the availability of outbreak prevention policies that correspond to ongoing virus outbreaks.

For Outbreak Prevention Services alerts, see [Understanding Event Center on page 10-2](#)

For creating scheduled policy downloads, see [Updating Outbreak Prevention Policies on page 20-10](#)

What best describes the capabilities of your Control Manager server?

- The virus is covered by the Outbreak Prevention Policies currently on Control Manager
- The virus is not covered by the Outbreak Prevention Policies currently on Control Manager

Virus Covered by Existing Policies

Control Manager can handle the outbreak. Start Outbreak Prevention Mode and apply the Outbreak Prevention Policy that corresponds to the virus outbreak.

Virus Not Covered by Existing Policies

If existing Outbreak Prevention Policies do not cover the virus outbreak, you must obtain a new policy from Trend Micro.

Trend Micro recommends manually updating outdated Outbreak Prevention Policies.

Step 3: Starting Outbreak Prevention Mode

Start Outbreak Prevention Mode to apply the policy that corresponds to the virus outbreak. After Control Manager has entered Outbreak Prevention Mode, you can evaluate product-setting recommendations from Trend Micro and modify them to suit your network. Policies implement product settings that block known virus-entry points.

When TrendLabs deploys an Outbreak Prevention Policy, it is very likely that they are still testing the appropriate virus pattern. The Outbreak Prevention Policy settings,

therefore allow you to protect your network during the critical period before TrendLabs releases a new pattern.

Before you start Outbreak Prevention Mode, set outbreak recipients and the notification method in the Event Center.

Considerations for Starting Outbreak Prevention

To start outbreak prevention, answer the following questions:

- How long do you want this policy to be active?

Specify how long the policy will remain active at the Policy in effect for list. The duration starts from the time you start Outbreak Prevention Mode. By default, Outbreak Prevention Policies remain active for two days.



Note

If you edit the policy, Control Manager resets and starts the duration on the day you applied the changes.

- How to deploy the policy?

Select an appropriate Deployment Plan for this stage. The plan determines which segments of the Product Directory will receive the settings contained in the policy.



Note

If none of the existing Deployment Plans suits your needs, create a new plan. See [Understanding Deployment Plans on page 7-23](#).

- Which entry points do you want this policy to block?

The products involved in this stage are:

- InterScan eManager
- InterScan WebProtect for ICAP
- InterScan Messaging Security Suite for Windows
- InterScan Messaging Security Suite for UNIX/IMSA/Solaris

- InterScan Web Security Suite for Windows/Solaris/Linux/Appliance
- InterScan Gateway Security Appliance
- InterScan VirusWall for Windows/Linux
- Network VirusWall
- PortalProtect
- ScanMail for Microsoft Exchange
- ScanMail for Lotus Notes/ScanMail for Domino
- IM Security for Microsoft Live Communications Server
- ServerProtect for Windows
- ServerProtect for Linux
- OfficeScan Corporate Edition
- Firewall Management-NetScreen

If settings for a particular product are included in the policy, then Control Manager automatically selects the product's check box.

**Note**

If any of the above products do not belong to your Control Manager network, Control Manager ignores the settings for those products.

Evaluating or Modifying Any of the Product Settings

Procedure

1. Click the product's link or the + icon to view its settings.
2. To view the settings for all the products, click **Expand All**. Trend Micro recommendations appear in non-editable fields on the right side of the screen.

3. Modify the settings to suit your needs.
-

Step 4: Follow-Up Procedures

After completing the Outbreak Prevention tutorial, monitor the progress of the policy using the Outbreak Prevention Mode history.



Tip

Manually stop Outbreak Prevention Mode after the policy duration expires. Otherwise, the Outbreak Prevention Mode Scheduled Update feature cannot automatically apply new Outbreak Prevention Policies.

Chapter 21

Using Control Manager Tools

Control Manager provides a number of tools to help you with specific configuration tasks. Control Manager houses most tools at the following location:

```
<root>:\Control Manager\WebUI\download\tools\
```

Control Manager 6.0 Service Pack 1 supports the following tools:

- *Using Agent Migration Tool (AgentMigrateTool.exe) on page 21-2:* To migrate Control Manager agents to a Control Manager 6.0 Service Pack 1 server
- *Using the Control Manager MIB File on page 21-2:* Use the Control Manager MIB file with an application (for example, HP OpenView) that supports SNMP protocol
- *Using the NVW Enforcer SNMPv2 MIB File on page 21-3:* Use the NVW Enforcer MIB file with an application (for example, HP OpenView) that supports SNMP protocol
- *Using the DBConfig Tool on page 21-3:* Use the DBConfig to change the user account, password, and the database name for the Control Manager database

Using Agent Migration Tool (AgentMigrateTool.exe)

The Agent Migration tool provided in Control Manager 6.0 Service Pack 1 Standard or Advanced Edition migrates agents administered by a Control Manager 5.5 or 5.0 server .



Note

The Agent Migration Tool supports Windows-based and Linux-based agent migration.

Procedure

1. Log on to the destination server.
 2. Run `AgentMigrateTool.exe` from the following location: `<root>\Program Files\Trend Micro\Control Manager\`
-

Using the Control Manager MIB File

Download and use the Control Manager MIB file with an application (for example, HP™ OpenView) that supports SNMP protocol.

Procedure

1. Navigate to the **Administration > Tools**.
The **Tools** screen appears.
2. On the working area, click **Control Manager MIB file**.
3. On the **File Download** screen, select **Save**, specify a location on the server, and then click **OK**.
4. On the server, extract the Control Manager MIB file `cm2.mib`, Management Information Base (MIB) file.

5. Import `cm2.mib` using an application (for example, HP OpenView) that supports SNMP protocol.
-

Using the NVW Enforcer SNMPv2 MIB File

Download and use the NVW Enforcer SNMPv2 MIB file with an application (for example, HP OpenView) that supports SNMP protocol.

Procedure

1. Navigate to **Administration > Tools**.
The **Tools** screen appears.
 2. Click **NVW Enforcer SNMPv2 MIB file**.
 3. On the **File Download** screen, select **Save**, specify a location on the server, and then click **OK**.
 4. On the server, extract the NVW Enforcer SNMPv2 MIB file `nvw2.mib2`, Management Information Base (MIB) file.
 5. Import `nvw2.mib2` using an application (for example, HP OpenView) that supports SNMP protocol.
-

Using the DBConfig Tool

The DBConfig tool allows users to change the user account, password, and the database name for the Control Manager database.

The tool offers the following options:

- **DBName:** Database name
- **DBAccount:** Database account
- **DBPassword:** Database password

- **Mode:** Database's authentication mode (SQL or Windows authentication)

**Note**

The default mode is SQL authentication mode, however Windows authentication mode is necessary when configuring for Windows authentication.

Procedure

1. From the Control Manager server, click **Start > Run**.

2. Type `cmd`, and then click **OK**.

The command prompt screen appears.

3. Change the directory to the Control Manager root directory (for example, `<root>\Program Files\Trend Micro\Control Manager\DBConfig`).

4. Type `dbconfig`.


The DBConfig tool interface appears.

5. Specify which settings you want to modify:

- Example 1: `DBConfig -DBName="db_your_database>" -DBAccount="sqlAct" -DBPassword="sqlPwd" -Mode="SQL"`
 - Example 2: `DBConfig -DBName="db_your_database>" -DBAccount="winAct" -DBPassword="winPwd" -Mode="WA"`
 - Example 3: `DBConfig -DBName="db_your_database>" -DBPassword="sqlPwd"`
-

Part V

Removing Control Manager and Contacting Support

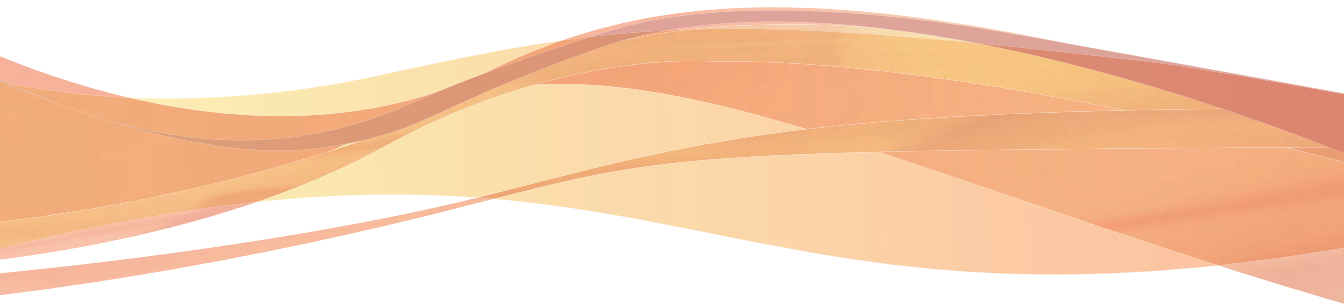

Chapter 22

Removing Trend Micro Control Manager

This chapter contains information about how to remove Control Manager components from your network, including the Control Manager server, Control Manager agents, and other related files.

This chapter contains the following sections:

- *Removing a Control Manager Server on page 22-2*
- *Manually Removing Control Manager on page 22-3*
- *Removing a Windows-Based Control Manager 2.x Agent on page 22-10*

Removing a Control Manager Server

You have two ways to remove Control Manager automatically (the following instructions apply to a Windows 2003 environment; details may vary slightly, depending on your Microsoft Windows platform):

Procedure

- From the **Start** menu, click **Start > Programs > Trend Micro Control Manager > Uninstalling Trend Micro Control Manager**.
- Using Add/Remove Programs:
 - a. Click **Start > Settings > Control Panel > Add/Remove Programs**.
 - b. Select **Trend Micro Control Manager**, and then click **Remove**.

This action automatically removes other related services, such as the Trend Micro Management Infrastructure and Common CGI services, as well as the Control Manager database.

- c. Click **Yes** to keep the database, or **No** to remove the database.



Note

Keeping the database allows you to reinstall Control Manager on the server and retain all system information, such as agent registration, and user account data.

If you reinstalled the Control Manager server, and deleted the original database, but did not remove the agents that originally reported to the previous installation, then the agents will re-register with the server when:

- Managed product servers restart the agent services
 - Control Manager agents verify their connection after an 8-hour period
-

Manually Removing Control Manager

This section describes how to remove Control Manager manually. Use the procedures below only if the Windows Add/Remove function or the Control Manager uninstall program is unsuccessful.

**Note**

Windows-specific instructions may vary between operating system versions. The following procedures are written for Windows Server 2003.

Removing Control Manager actually involves removing distinct components. These components may be removed in any order; they may even be removed together. However, for purposes of clarity, the uninstallation for each module is discussed individually, in separate sections. The components are:

- Control Manager application
- Trend Micro Management Infrastructure
- Common CGI Modules
- Control Manager Database (optional)
- PHP
- FastCGI

Other Trend Micro products also use the Trend Micro Management Infrastructure and Common CGI modules, so if you have other Trend Micro products installed on the same computer, Trend Micro recommends not removing these two components.

**Note**

After removing all components, you must restart your server. You only have to do this once — after completing the removal.

Removing the Control Manager Application

Manual removal of the Control Manager application involves the following steps:

1. [*Stopping Control Manager Services on page 22-4*](#)
2. [*Removing Control Manager IIS Settings on page 22-5*](#)
3. [*Removing Crystal Reports, PHP, FastCGI, TMI, and CCGI on page 22-6*](#)
4. [*Deleting Control Manager Files/ Directories and Registry Keys on page 22-8*](#)
5. [*Removing the Database Components on page 22-9*](#)
6. [*Removing Control Manager and NTP Services on page 22-10*](#)

Stopping Control Manager Services

Use the **Windows Services** screen to stop all of the following Control Manager services:

- Trend Micro Management Infrastructure
- Trend Micro Common CGI
- Trend Micro Control Manager
- Trend Micro NTP



Note

These services run in the background on the Windows operating system, not the Trend Micro services that require Activation Codes (for example, Outbreak Prevention Services).

Stopping Control Manager Services from the Windows Services Screen

Procedure

1. Click **Start > Programs > Administrative Tools > Services** to open the **Services** screen.
 2. Right-click **<Control Manager service>**, and then click **Stop**.
-

Stopping IIS and Control Manager Services from the Command Prompt

Procedure

- Run the following commands at the command prompt:

```
net stop w3svc
```

```
net stop tmcmm
```

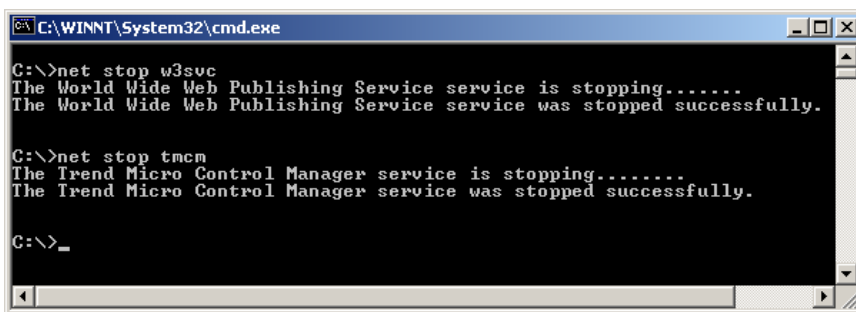


FIGURE 22-1. View of the command line with the necessary services stopped

Removing Control Manager IIS Settings

Remove the Internet Information Services settings after stopping the Control Manager services.

Procedure

- From the Control Manager server, click **Start > Run**.

The **Run** dialog box appears.

- Type the following in the **Open** field:

```
%SystemRoot%\System32\Inetsrv\iis.msc
```

- On the left-hand menu, double-click the server name to expand the console tree.

4. Double-click **Default Web Site**.
 5. Delete the following virtual directories:
 - ControlManager
 - TVCSDownload
 - crystalreportviewers12
 - TVCS
 - Jakarta
 - WebApp
 6. On IIS 6 only:
 - a. Right-click the IIS website you set during the installation.
 - b. Click **Properties**.
 7. Select the **ISAPI Filters** tab.
 8. Delete the following ISAPI filters:
 - TmcmRedirect
 - CCGIRedirect
 - ReverseProxy
 9. On IIS 6 only, delete the following web service extensions:
 - Trend Micro Common CGI Redirect Filter (If removing CCGI)
 - Trend Micro Control Manager CGI Extensions
-

Removing Crystal Reports, PHP, FastCGI, TMI, and CCGI

Removal of PHP, FastCGI, TMI and CCGI is optional. Use Add/Remove Programs to uninstall Crystal Reports, PHP, and FastCGI.

Removing Crystal Reports

Procedure

1. On the Control Manager server, click **Start > Settings > Control Panel > Add/Remove Programs**.
 2. Scroll down to Crystal Reports Runtime Files, and then click **Remove** to remove the Crystal Reports related files automatically.
-

Removing PHP and FastCGI

Procedure

1. On the Control Manager server, click **Start > Settings > Control Panel > Add/Remove Programs**.
 2. Scroll down to PHP, and then click **Remove** to remove PHP related files automatically.
 3. Scroll down to FastCGI, and then click **Remove** to remove FastCGI related files automatically.
-

Removing TMI and CCGI

Procedure

1. Run the Microsoft service tool `Sc.exe`.
2. Type the following commands:

```
sc delete "TrendCGI"
```

```
sc delete "TrendMicro Infrastructure"
```

Deleting Control Manager Files/Directories and Registry Keys

Procedure

1. Delete the following directories:

- `.Trend Micro\Control Manager`
- `.Trend Micro\COMMON\ccgi`
- `.Trend Micro\COMMON\TMI`
- `.PHP`
- `C:\Documents and Settings\All Users\Start Menu\Programs\PHP 5`
- `C:\Documents and Settings\All Users\Start Menu\Programs\Trend Micro Control Manager`

2. Delete the following Control Manager registry keys:

- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\CommonCGI`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\DamageCleanupService`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\MCPAgent`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\OPPTrustPort`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\TMI`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\TVCS`
- `HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\VulnerabilityAssessmentServices`
- `HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\TMCM`
- `HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\TMI`

- `HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\TMCM`
 - `HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\TrendCCGI`
 - `HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\TrendMicro Infrastructure`
 - `HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\TrendMicro_NTP`
-

Removing the Database Components

This section describes how to remove the following database components from the Control Manager server:

- Removing Control Manager ODBC Settings
- Removing the Control Manager SQL Server 2008 Express Database

Removing Control Manager ODBC Settings

Procedure

1. On the Control Manager server, click **Start > Run**.
The **Run** dialog box appears.
 2. Type the following in the **Open** field:
`odbcad32.exe`
 3. On the **ODBC Data Source Administrator** screen, click the **System DSN** tab.
 4. Under **Name**, select **ControlManager_Database**.
 5. Click **Remove**, and then click **Yes** to confirm.
-

Removing the Control Manager SQL Server 2008 R2 Express Database

Procedure

1. On the Control Manager server, click **Start > Control Panel > Add/Remove Programs**.
2. Scroll down to **SQL Server 2008 R2** and then click **Remove** to remove the related files automatically.



Tip

Trend Micro recommends visiting the Microsoft website for instructions on removing SQL Server 2008 R2 Express if you have any issues with the uninstallation:

<http://support.microsoft.com/kb/955499>

Removing Control Manager and NTP Services

Procedure

1. Run the Microsoft service tool `Sc.exe`.
2. Type the following commands:

```
sc delete "TMCM"
```

```
sc delete "TrendMicro_NTP"
```

Removing a Windows-Based Control Manager 2.x Agent

To remove one or more agents, you must run the uninstallation component of the Control Manager Agent setup program.

Uninstall agents remotely, either by running the program from the Control Manager server, or another server, or locally, by running the setup program on the agent computer.

Procedure

1. Navigate to **Administration > Settings > Product Agent Settings**.

The **Product Agent Settings** screen appears.

2. Click the **RemoteInstall.exe** link to download the application.
3. Using Microsoft Explorer, go to the location where you saved the agent setup program.
4. Double-click the `RemoteInstall.exe` file.

The **Trend Micro Control Manager Agent Setup** screen appears.

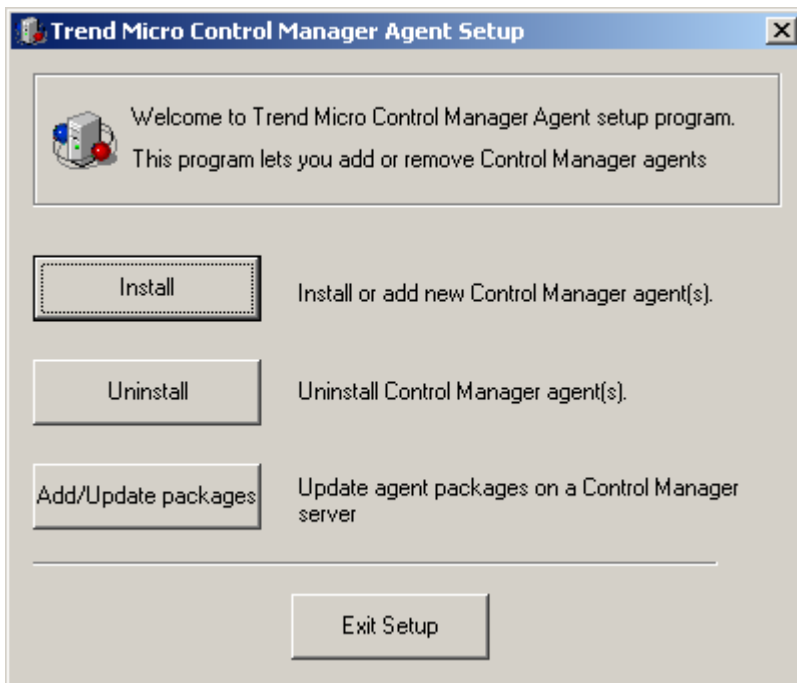


FIGURE 22-2. Trend Micro Control Manager Agent setup program

5. Click **Uninstall**.

The **Welcome** screen appears.

6. Click **Next**.

The **Control Manager source server logon** screen appears.

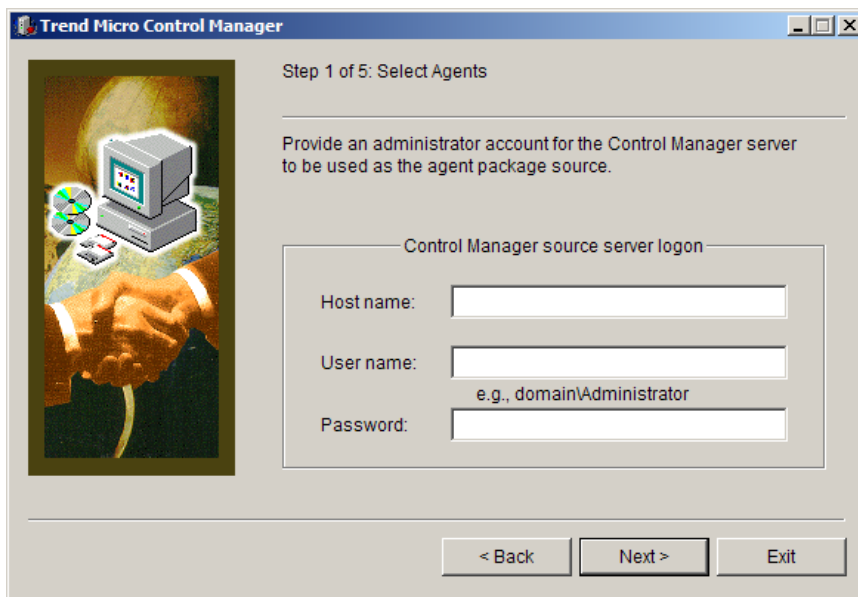


FIGURE 22-3. Control Manager source server logon

7. Specify and provide Administrator-level logon credentials for the Control Manager server. Type the following information:
 - Host name
 - User name
 - Password
8. Click **Next**. Select the product whose agent you want to remove.
9. Click **Next**. Select the servers from which to remove the agents. You have two ways to select those servers:
 - To select from the list:
 - a. In the left list box, double-click the domain containing the antivirus servers, and the domain expands to show all the servers inside.

- b. Select the target server(s) from the left list box, and then click **Add**. The chosen server appears on the right list box. Click **Add All** to add agents to all servers in the selected chosen domain. Alternatively, you can double-click on a server to add it to the left list.
 - To specify a server name directly:
 - a. Type the server's FQDN or IP address in the **Server name** field.
 - b. Click **Add**.

The server appears on the right list box.
 - c. To remove servers from the list, select a server from the right list box, and then click **Remove**. To remove all servers, click **Remove All**.
- 10. Click **Back** to return to the previous screen, **Exit** to abort the operation, or **Next** to continue.
- 11. Provide Administrator-level logon credentials for the selected servers. Type the required user name and password in the appropriate field.
- 12. Click **OK**. The **Analyze Chosen Server** screen provides the following details about the target servers: server name, domain, and the type of agent detected.

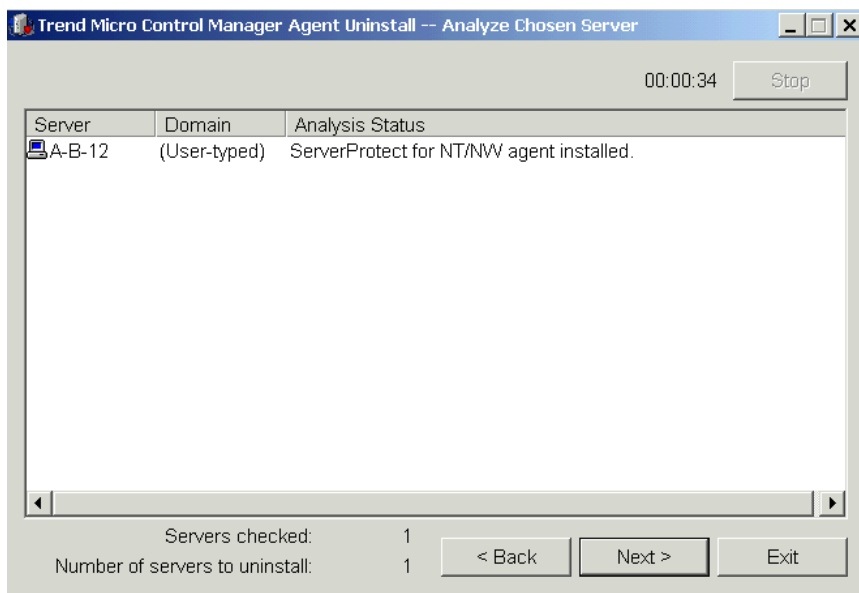


FIGURE 22-4. Analyze chosen Control Manager server

13. Click **Next** to continue.

The table on this screen shows the following information about the target servers: server name, operating system version, IP address, Domain name, and the version of the agent you will remove. Click **Back** to return to the previous screen, **Exit** to abort the operation, or **Uninstall** to remove the agent.

The uninstallation begins.

14. Click **OK**, and then on the **Removing Agents** screen, click **Exit**.

Chapter 23

Getting Support

Trend Micro has committed to providing service and support that exceeds our users' expectations. This chapter contains information on how to get technical support. Remember, you must register your product to be eligible for support.

This chapter contains the following topics:

- *Before Contacting Technical Support on page 23-2*
- *Contacting Technical Support on page 23-2*
- *TrendLabs on page 23-3*
- *Other Useful Resources on page 23-3*

Before Contacting Technical Support

Before contacting Technical Support, here are two things you can quickly do to try and find a solution to your problem:

- Check your documentation: the manual and online help provide comprehensive information about Control Manager. Search both documents to see if they contain your solution.
- Visit our Technical Support website: our Technical Support website contains the latest information about all Trend Micro products. The support website has answers to previous user inquiries.

To search the Knowledge Base, visit

<http://esupport.trendmicro.com/en-us/default.aspx>

Contacting Technical Support

Trend Micro provides technical support, pattern downloads, and program updates for one year to all registered users, after which you must purchase renewal maintenance. If you need help or just have a question, please feel free to contact us. We also welcome your comments.

- Get a list of the worldwide support offices at <http://esupport.trendmicro.com>
- Get the latest Trend Micro product documentation at <http://docs.trendmicro.com>

In the United States, you can reach the Trend Micro representatives through phone, fax, or email:

```
Trend Micro, Inc.  
10101 North De Anza Blvd.,  
Cupertino, CA 95014  
Toll free: +1 (800) 228-5651 (sales)  
Voice: +1 (408) 257-1500 (main)  
Fax: +1 (408) 257-2003  
Web address: http://www.trendmicro.com  
Email: support@trendmicro.com
```

Resolve Issues Faster

To resolve the issue faster, when you contact our staff, provide as much of the following information as you can:

- Product serial number
- Control Manager Build version
- Operating system version, Internet connection type, and database version (for example, SQL 2005 or SQL 2008)
- Exact text of the error message, if any
- Steps to reproduce the problem

TrendLabs

Trend Micro TrendLabsSM is a global network of antivirus research and product support centers providing continuous, 24 x 7 coverage to Trend Micro customers worldwide.

Staffed by a team of more than 250 engineers and skilled support personnel, the TrendLabs dedicated service centers worldwide ensure rapid response to any virus outbreak or urgent customer support issue, anywhere in the world.

The TrendLabs modern headquarters earned ISO 9002 certification for its quality management procedures in 2000. TrendLabs is one of the first antivirus research and support facilities to be so accredited. Trend Micro believes that TrendLabs is the leading service and support team in the antivirus industry.

For more information about TrendLabs, please visit:

<http://cloudsecurity.trendmicro.com/us/technology-innovation/experts/index.html#trendlabs>

Other Useful Resources


Trend Micro offers a host of services through its website, <http://www.trendmicro.com>.

Internet-based tools and services include:

- Trend Micro™ Smart Protection Network™: monitor security threat incidents around the world
- HouseCall™: Trend Micro online virus scanner

Appendices

Appendices

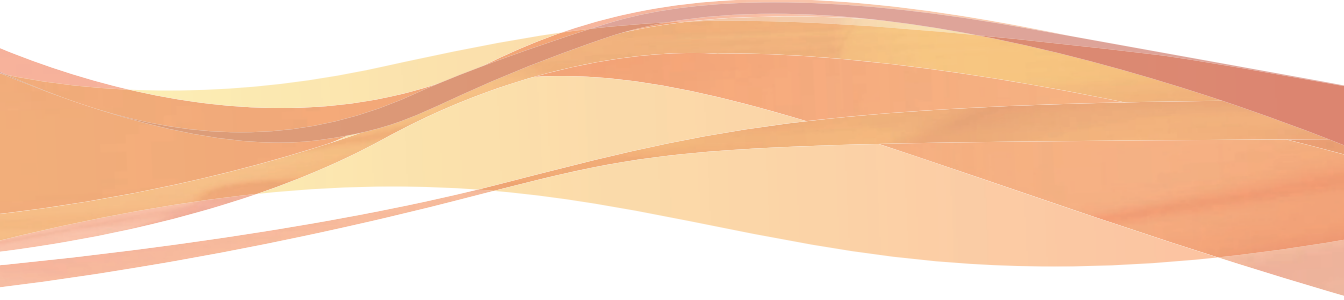

Appendix A

Control Manager System Checklists

Use the checklists in this appendix to record relevant system information as a reference.

This appendix contains the following sections:

- *Server Address Checklist on page A-2*
- *Ports Checklist on page A-3*
- *Control Manager 2.x Agent Installation Checklist on page A-4*
- *Control Manager Conventions on page A-5*
- *Core Process and Configuration Files on page A-5*
- *Communication and Listening Ports on page A-8*
- *Control Manager Product Version Comparison on page A-9*

Server Address Checklist

You must provide the following server address information during the installation process, as well as during the configuration of the Control Manager server to work with your network. Record the information here for easy reference.

TABLE A-1. Server Address Checklist

INFORMATION REQUIRED	SAMPLE	YOUR VALUE
Control Manager server information		
IP address	10.1.104.255	
Fully qualified domain name (FQDN)	server.company.com	
NetBIOS (host) name	yourserver	
Web server information		
IP address	10.1.104.225	
Fully qualified domain name (FQDN)	server.company.com	
NetBIOS (host) name	yourserver	
SQL-based Control Manager database information		
IP address	10.1.104.225	
Fully qualified domain name (FQDN)	server.company.com	
NetBIOS (host) name	sqlserver	
Proxy server for component download		
IP address	10.1.174.225	
Fully qualified domain name (FQDN)	proxy.company.com	
NetBIOS (host) name	proxyserver	

INFORMATION REQUIRED	SAMPLE	YOUR VALUE
SMTP server information (Optional; for email message notifications)		
IP address	10.1.123.225	
Fully qualified domain name (FQDN)	mail.company.com	
NetBIOS (host) name	mailserver	
SNMP Trap information (Optional; for SNMP Trap notifications)		
Community name	trendmicro	
IP address	10.1.194.225	

Ports Checklist

Control Manager uses the following ports for the indicated purposes.

PORT	SAMPLE	YOUR VALUE
SMTP	25	
Proxy	8088	
Pager COM	COM1	
Proxy for Trend VCS Agent (Optional)	223	
Web Console and Update/Deploy components	80	
Firewall, "forwarding" port (Optional; used during the Control Manager Agent installation)	224	

PORT	SAMPLE	YOUR VALUE
Trend Micro Management Infrastructure (TMI) internal process communication (for remote products)	10198	
TMI external process communication	10319	
Entity emulator	10329	

**Note**

Control Manager requires the exclusive use of ports 10319 and 10198.

Control Manager 2.x Agent Installation Checklist

The following information is used during agent installation.

INFORMATION REQUIRED	SAMPLE	YOUR VALUE
Control Manager server administrator account user name	root	
Encryption key location	C:\MyDocuments \E2EPublic.dat	

**Note**

You can use any user name instead of the root account. However, Trend Micro recommends using the root account, because deleting the user name specified while installing the agent makes managing the agent very difficult.

PRODUCT NAME	ADMINISTRATOR-LEVEL ACCOUNT	IP ADDRESS	HOSTNAME
Sample	Admin	10.225.225.225	PH-antivirus

Control Manager Conventions

Refer to the following conventions applicable for the Control Manager installation or web console configuration.

- User names
 - Max. length: 32 characters
 - Allowed: A-Z, a-z, 0-9, -, _
- Folder names
 - Max. length: 40 characters
 - Not allowed: / > & "

**Note**

For the Control Manager server host name, the setup program supports servers with underscores ("_") as part of the server name.

Core Process and Configuration Files

Control Manager saves system configuration settings and temporary files in XML format.

The following tables describe the configuration files and processes used by Control Manager.

TABLE A-2. Control Manager Configuration Files

CONFIGURATION FILE	DESCRIPTION
AuthInfo.ini	Configuration file that contains information about private key file names, public key file names, certificate file names, and the encrypted passphrase of the private key as well as the host ID and port.
aucfg.ini	ActiveUpdate configuration file
TVCS_Cert.pem	Certificate used by SSL authentication
TVCS_Pri.pem	Private Key used by SSL
TVCS_Pub.pem	Public Key used by SSL
ProcessManager.xml	Used by ProcessManager.exe
CmdProcessorEventHandler.xml	Used by CmdProcessor.exe
UIProcessorEventHandler.xml	Used by UIProcessor.exe
DMRegisterinfo.xml	Used by CasProcessor.exe
DataSource.xml	Stores the connection parameters for Control Manager processes
SystemConfiguration.xml	Control Manager system configuration file
CascadingLogConfiguration.xml	Log upload configuration file used for child servers
agent.ini	MCP agent file
TMI.cfg	Trend Micro Management Infrastructure configuration file

TABLE A-3. Control Manager Processes

PROCESSES	DESCRIPTION
ProcessManager.exe	Launches and stops other Control Manager core processes.

PROCESSES	DESCRIPTION
<code>CmdProcessor.exe</code>	Sends XML instructions, formed by other processes, to managed products, processes product registration, sends alerts, performs scheduled tasks, and applies Outbreak Prevention Policies.
<code>UIProcessor.exe</code>	Processes and transforms user input made in the Control Manager web console into actual commands.
<code>LogReceiver.exe</code>	Receives managed product logs and messages.
<code>LogProcessor.exe</code>	Receives new messages from managed products and receives the entity information from child Control Manager servers.
<code>LogRetriever.exe</code>	Retrieves and saves logs in the Control Manager database.
<code>ReportServer.exe</code>	Generates Control Manager reports.
<code>MsgReceiver.exe</code>	Receives messages from the Control Manager server, managed products, and child servers.
<code>CasProcessor.exe</code>	Allows a Control Manager server (a parent server) to manage other Control Manager servers (child servers).
<code>DCSPProcessor.exe</code>	Performs Damage Cleanup Services functions.
<code>Ntpd.exe</code>	Network Time Protocol service.
<code>inetinfo.exe</code>	Microsoft Internet Information Service process.
<code>jk_nt_service.exe</code> <code>java.exe</code>	Java server side extensions used to build web-based user interface by defining the interface instead of using a lot of standalone CGI programs.
<code>cm.exe</code>	Manages <code>dmserver.exe</code> and <code>mrf.exe</code> .
<code>mrf.exe</code>	The Communicator process.
<code>dmserver.exe</code>	Provides the Control Manager web console log on page and manages the Product Directory (Control Manager-side).

PROCESSES	DESCRIPTION
sCloudProcessor.NET.exe	Manages tasks related to Policy Management.

Communication and Listening Ports

These are the default Control Manager communication and listening ports.

TYPE	COMMUNICATION PORT
Internal communication	10198
External communication	10319

SERVICE	SERVICE PORT
ProcessManager.exe	20501
CmdProcessor.exe	20101
UIProcessor.exe	20701
LogReceiver.exe	20201
LogProcessor.exe	21001
LogRetriever.exe	20301
ReportServer.exe	20601
MsgReceiver.exe	20001
EntityEmulator.exe	20401
CasProcessor.exe	20801
DcsProcessor.exe	20903

Control Manager Product Version Comparison

The following table provides a comparison of features between Control Manager versions.

TABLE A-4. Product Version Comparison

FEATURES	CONTROL MANAGER VERSION					
	5.0 ADV	5.0 STD	5.5 ADV	5.5 STD	6.0 ADV	6.0 STD
2.x and MCP agent interfaces with the managed products	●	●	●	●	●	●
Ad Hoc Query	●	●	●	●	●	●
Automatic component (for example, patterns/rules) update	●	●	●	●	●	●
Cascading management structure	●		●		●	
Central database for all virus log and system events	●	●	●	●	●	●
Centralized, web-based, virus management solution for the enterprise	●	●	●	●	●	●
Child server monitoring	●		●		●	
Child server task issuance	●		●		●	
Command Tracking	●	●	●	●	●	●
Communicator Heartbeat	●	●	●	●	●	●
Communicator Scheduler	●	●	●	●	●	●
Component download granularity	●	●	●	●	●	●
Configuration by group	●	●	●	●	●	●

FEATURES	CONTROL MANAGER VERSION					
	5.0 ADV	5.0 STD	5.5 ADV	5.5 STD	6.0 ADV	6.0 STD
Configure multiple download sources	●	●	●	●	●	●
Consistent managed product and Control Manager UI	●	●	●	●	●	●
Control Manager MIB files (previously called HP OpenView MIB)	●	●	●	●	●	●
Customized user types	●	●	●	●	●	●
Deployment Plans	●	●	●	●	●	●
Directory Manager	●	●	●	●	●	●
Enhanced Security Communication	●	●	●	●	●	●
Event Center	●	●	●	●	●	●
Improved Navigation	●	●	●	●	●	●
Improved User Interface	●	●	●	●	●	●
InterScan Web Security Service integration	●	●	●	●	●	●
Logging Enhancements	●	●	●	●	●	●
Log processing speed enhancements			●	●	●	●
Manage antivirus and content security products	●	●	●	●	●	●
Manage services	●	●	●	●	●	●
Managed product license manager	●		●		●	

FEATURES	CONTROL MANAGER VERSION					
	5.0 ADV	5.0 STD	5.5 ADV	5.5 STD	6.0 ADV	6.0 STD
Managed product reporting	●		●		●	
Web console rendering enhancement			●	●	●	●
Microsoft SQL Express or Microsoft SQL 2005	●	●	●	●	●	●
Microsoft SQL Express or Microsoft SQL 2008			●	●	●	●
Microsoft SQL 2012					●	●
MSDE or Microsoft SQL 7/2000	●	●				
MSN Messenger notification	●	●	●	●	●	●
Notification and Outbreak Alert	●	●	●	●	●	●
OfficeScan Integration Enhancements			●	●	●	●
Outbreak Commander / Outbreak Prevention Services (OPS) - Automatic Download and Deployment of OPP - Manual Download and Deployment of OPP	●	●	●	●		
Passive Support for 3rd Party Product	●		●			
Policy management					●	●
Remote and Local Agent Installation	●	●	●	●	●	●
Remote management	●	●	●	●	●	●

FEATURES	CONTROL MANAGER VERSION					
	5.0 ADV	5.0 STD	5.5 ADV	5.5 STD	6.0 ADV	6.0 STD
Reporting	●		●		●	
Secure communication between Server and Agents	●	●	●	●	●	●
Single sign-on (SSO) for managed products that support SSO	●	●	●	●	●	●
Smart Protection Network integration			●	●	●	●
SNMP trap notification	●		●		●	
SSL support for ActiveUpdate	●	●	●	●	●	●
SSL support for web console	●	●	●	●	●	●
Support Control Manager 2.x agents	●	●	●	●	●	●
Support HTTPS communication between server, agents, and managed products	●	●	●	●	●	●
Support MCP agents	●	●	●	●	●	●
Syslog notification	●		●		●	
Threat Intelligence-Oriented Dashboard			●	●	●	●
Trend Micro InterScan for Cisco Content Security and Control Security Services Module (ISC CSC SSM) integration	●	●	●	●	●	●
Trend Micro Network VirusWall Enforcer 1500i integration	●	●	●	●	●	●

FEATURES	CONTROL MANAGER VERSION					
	5.0 ADV	5.0 STD	5.5 ADV	5.5 STD	6.0 ADV	6.0 STD
Trend Micro Network VirusWall Enforcer 3500i integration	●	●	●	●	●	●
Trend Micro Product Registration server integration	●	●	●	●	●	●
TrendLabs Message Board	●	●	●	●		
User account management	●	●	●	●	●	●
Vulnerability Assessment	●	●	●	●		
Windows Authentication	●	●	●	●	●	●
Work-hour control	●	●	●	●	●	●

Appendix B

Data Views

Database views are available to Control Manager report templates and to Ad Hoc Query requests.

This appendix contains the following sections:

- *Data Views: Product Information on page B-3*
 - *License Information on page B-3*
 - *Managed Product Information on page B-5*
 - *Component Information on page B-10*
 - *Control Manager Information on page B-15*
- *Data View: Security Threat Information on page B-18*
 - *Virus/Malware Information on page B-18*
 - *Spyware/Grayware Information on page B-33*
 - *Content Violation Information on page B-47*
 - *Spam Violation Information on page B-52*
 - *Policy/Rule Violation Information on page B-56*
 - *Web Violation/Reputation Information on page B-62*

- *Suspicious Threat Information on page B-71*
- *Overall Threat Information on page B-83*
- *Data Loss Prevention Information on page B-90*
 - *DLP Incident Information on page B-90*
 - *DLP Template Match Information on page B-91*

Data Views: Product Information

Displays information about Control Manager, Managed Products, components, and licenses.

License Information

Displays status, detailed, and summary information about Control Manager and managed product license information.

Product License Status

Displays detailed information about the managed product and information about the Activation Code the managed product uses. Examples: managed product information, whether the Activation Code is active, the number of managed products the Activation Code activates

TABLE B-1. Product License Status Data View

DATA	DESCRIPTION
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Service	Displays the name of the managed product service. Example: Outbreak Protection Services
License Status	Displays the status of the license for managed products. Example: Activated, Expired, In grace period
Activation Code	Displays the Activation Code for managed products.

DATA	DESCRIPTION
Activation Codes	Displays the number of Activation Codes a managed products uses.
License Expiration	Displays the date the license expires for the managed product.

Product License Information Summary

Displays detailed information about the Activation Code and information on managed products that use the Activation Code. Examples: seat count that the Activation Code allows, evaluation or full product version, user-defined description about the Activation Code

TABLE B-2. Product License Information Summary Data View

DATA	DESCRIPTION
Activation Code	Displays the Activation Code for managed products.
User-defined Description	Displays the user-defined description for the Activation Code.
Products/Services	Displays the number of managed products or services that use the Activation Code.
License Status	Displays the status of the license for managed products. Example: Activated, Expired, In grace period
Product Type	Displays the type of managed product the Activation Code provides. Example: Trial version, Full version
License Expiration	Displays the date the license expires for the managed product.
Seats	Displays the number of seats the Activation Code allows.

Detailed Product License Information

Displays information about the Activation Code and information on managed products that use the Activation Code. Examples: managed product information, evaluation or full product version, license expiration date

TABLE B-3. Detailed Product License Information Data View

DATA	DESCRIPTION
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Service	Displays the name of the managed service. Example: Web Reputation Service
License Status	Displays the status of the license for managed products. Example: Activated, Expired, In grace period
Product Type	Displays the type of managed product the Activation Code provides. Example: Trial version, Full version
Activation Code	Displays the Activation Code for managed products.
License Expiration	Displays the date the license expires for the managed product.
Seats	Displays the number of seats the Activation Code allows.
Description	Displays the description for the Activation Code.

Managed Product Information

Displays status, detailed, and summary information about managed products or managed product endpoints.

Product Distribution Summary

Displays summary information about managed products registered to Control Manager. Examples: managed product name, version number, and number of managed products

TABLE B-4. Product Distribution Summary Data View

DATA	DESCRIPTION
Registered to Control Manager	Displays the Control Manager server to which the managed product is registered.
Product Category	Displays the threat protection category for a managed product. Example: Server-based products, Desktop (computers and mobile devices) products  Note Desktop products includes mobile device solutions.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Product Role	Displays the role the managed product has in the network environment. Example: server, client
Products	Displays the total number of a specific managed product a network contains.

Product Status Information

Displays detailed information about managed products registered to Control Manager. Examples: managed product version and build number, operating system

TABLE B-5. Product Status Information Data View

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.

DATA	DESCRIPTION
Product Host/ Endpoint	This data column displays one of the following: - The host name of the server on which the managed product installs. - The host name of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint MAC	This data column displays one of the following: - The MAC address of the server on which the managed product installs. - The MAC address of a computer with a client (for example OfficeScan client) installed.
Managing Control Manager Entity	Displays the entity display name of the Control Manager server to which the managed product is registered.
Managing Server Entity	Displays the entity display name for a managed product to which an endpoint is registered. Control Manager identifies managed products using the managed product's entity display name.
Domain	Displays the domain to which the managed product belongs.
Connection Status	This data column displays one of the following: - The managed product's connection status to Control Manager. Example: Normal, Abnormal, Offline - The endpoint client's connection status to a managed product (OfficeScan). Example: Normal, Abnormal, Offline
Pattern Status	Displays the status of the pattern files/rules the managed product or a computer with a client (for example OfficeScan client) uses. Example: up-to-date, out-of-date

DATA	DESCRIPTION
Engine Status	Displays the status of the scan engines the managed product or a computer with a client (for example OfficeScan client) uses. Example: up-to-date, out-of-date
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's or managed product client's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Product Build	Displays the build number of the managed product. This information appears on the About screen for products. Example: Version: 5.0 (Build 1219)
Product Role	Displays the role the managed product or a computer with a client (for example OfficeScan client) has in the network environment. Example: server, client
Operating System	Displays the operating system of the computer where the managed product/agent installs.
OS Version	Displays the version number of the operating system of the computer where the managed product/agent installs.
OS Service Pack	Displays the service pack number of the operating system of the computer where the managed product/agent installs.

ServerProtect and OfficeScan Server/Domain Status Summary

Displays summary information about client/server managed products. Examples: pattern file out-of-date, scan engine out-of-date

TABLE B-6. ServerProtect and OfficeScan Server/Domain Status Summary Data View

DATA	DESCRIPTION
Product Entity	Displays the entity display name for a managed product.
Domain	Displays the domain to which the managed product belongs.

DATA	DESCRIPTION
Endpoints	Displays the number of endpoints in a domain.
Patterns Out-of-Date	Displays the number of endpoints with out-of-date pattern files.
Patterns Up-to-Date Rate (%)	Displays the percentage of endpoints with up-to-date pattern files.
Engines Out-of-Date	Displays the number of endpoints with out-of-date scan engines.
Engines Up-to-Date Rate (%)	Displays the percentage of endpoints with up-to-date scan engines.

Product Event Information

Displays information relating to managed product events. Examples: managed products registering to Control Manager, component updates, Activation Code deployments

TABLE B-7. Product Event Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data about the managed product event.
Generated	Displays the time that the managed product generates data about the event.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Event Severity	Displays the severity of an event. Example: Information, Critical, Warning

DATA	DESCRIPTION
Event Type	Displays the type of event that occurred. Example: download virus found, file blocking, rollback
Command Status	Displays the status of the command. Example: successful, unsuccessful, in progress
Description	Displays the description a managed product provides for the event.

Component Information

Displays status, detailed, and summary information about out of date and up to date and component deployment of managed product components.

Engine Status

Displays detailed information about scan engines managed products use. Examples: scan engine name, time of the latest scan engine deployment, and which managed products use the scan engine

TABLE B-8. Engine Status Data View

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product Host/ Endpoint	This data column displays one of the following: - The host name of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.

DATA	DESCRIPTION
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Connection Status	This data column displays one of the following: - The managed product's connection status to Control Manager. Example: Normal, Abnormal, Offline - The endpoint client's connection status to a managed product (OfficeScan). Example: Normal, Abnormal, Offline
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's or managed product client's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Product Role	Displays the role the managed product or a computer with a client (for example OfficeScan client) has in the network environment. Example: server, client
Engine	Displays the name of the scan engine. Example: Anti-spam Engine (Windows), Virus Scan Engine IA 64 bit Scan Engine
Engine Version	Displays the version of the scan engine. Example: Anti-spam Engine (Windows): 3.000.1153, Virus Scan Engine IA 64 bit Scan Engine: 8.000.1008
Engine Status	Displays the scan engine currency status. Example: up-to-date, out-of-date
Engine Updated	Displays the time of the latest scan engine deployment to managed products or endpoints.

Pattern/Rule Status

Displays detailed information about pattern files/rules managed products use.
Examples: pattern file/rule name, time of the latest pattern file/rule deployment, and which managed products use the pattern file/rule

TABLE B-9. Pattern/Rule Status Data View

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product Host/ Endpoint	This data column displays one of the following: - The host name of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Connection Status	This data column displays one of the following: - The managed product's connection status to Control Manager. Example: Normal, Abnormal, Offline - The endpoint client's connection status to a managed product (OfficeScan). Example: Normal, Abnormal, Offline
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange

DATA	DESCRIPTION
Product Version	Displays the managed product's or managed product client's version number. Example: OfficeScan- 10.0, Control Manager- 5.0
Product Role	Displays the role the managed product or a computer with a client (for example OfficeScan client) has in the network environment. Example: server, client
Pattern/Rule	Displays the name of the pattern file or rule. Example: Virus Pattern File, Anti-spam Pattern
Pattern/Rule Version	Displays the version of the pattern file or rule. Example: Virus Pattern File: 3.203.00, Anti-spam Pattern: 14256
Pattern/Rule Status	Displays the pattern file/rule currency status. Example: up-to-date, out-of-date
Pattern/Rule Updated	Displays the time of the latest pattern file/rule deployment to managed products or endpoints.

Product Component Deployment

Displays detailed information about components managed products use. Examples: pattern file/rule name, pattern file/rule version number, and scan engine deployment status

TABLE B-10. Product Component Deployment Data View

DATA	DESCRIPTION
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product Version	Displays the managed product's version number. Example: OfficeScan- 10.0, Control Manager- 5.0

DATA	DESCRIPTION
Connection Status	Displays the connection status between the managed product and Control Manager server or managed products and their endpoints.
Pattern/Rule Status	Displays the pattern file/rule currency status. Example: up-to-date, out-of-date
Pattern/Rule Deployment Status	Displays the deployment status for the latest pattern file/rule update. Example: successful, unsuccessful, in progress
Pattern/Rule Deployment	Displays the time of the latest pattern file/rule deployment to managed products or endpoints.
Engine Status	Displays the scan engine currency status. Example: up-to-date, out-of-date
Engine Deployment Status	Displays the deployment status for the latest scan update. Example: successful, unsuccessful, in progress
Engine Deployment	Displays the time of the latest scan engine deployment to managed products or endpoints.

Engine Status Summary

Displays summary information about scan engines managed products use. Examples: scan engine name, scan engine rate, and the number of scan engines out-of-date

TABLE B-11. Engine Status Summary Data View

DATA	DESCRIPTION
Engine	Displays the name of the scan engine. Example: Anti-spam Engine (Windows), Virus Scan Engine IA 64 bit Scan Engine
Version	Displays the version of the scan engine. Example: Anti-spam Engine (Windows): 3.000.1153, Virus Scan Engine IA 64 bit Scan Engine: 8.000.1008
Up-to-Date	Displays the number of managed products with up-to-date scan engines.

DATA	DESCRIPTION
Out-of-Date	Displays the number of managed products with out-of-date scan engines.
Up-to-Date Rate (%)	Displays the percentage of managed products with up-to-date scan engines. This includes scan engines that return N/A as a value.

Pattern/Rule Status Summary

Displays summary information about pattern files/rules managed products use. Examples: pattern file/rule name, pattern file/rule up-to-date rate, and the number of pattern files/rules out-of-date

TABLE B-12. Pattern File/Rule Status Summary Data View

DATA	DESCRIPTION
Pattern/Rule	Displays the name of the pattern file or rule. Example: Virus Pattern File, Anti-spam Pattern
Version	Displays the version of the pattern file or rule. Example: Virus Pattern File: 3.203.00, Anti-spam Pattern: 14256
Up-to-Date	Displays the number of managed products with up-to-date pattern files or rules.
Out-of-Date	Displays the number of managed products with out-of-date pattern files or rules.
Up-to-Date Rate (%)	Displays the percentage of managed products with up-to-date pattern files/rules. This includes pattern files/rules that return n/a as a value.

Control Manager Information

Displays information about Control Manager user access, Command Tracking information, and Control Manager server events.

User Access Information

Displays Control Manager user access and the activities users perform while logged on to Control Manager.

TABLE B-13. User Access Information Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the activity starts.
User	Displays the name of the user who initiates the activity.
Account Type	Displays the account type a Control Manager administrator assigns to a user. For example: Root, Power User, or Operator.
Account Type Description	Displays the description of the Account Type. This description comes from Control Manager for default account types and from user-defined descriptions for custom account types.
Activity	Displays the activity the user performs on Control Manager. Example: log on, edit user account, add deployment plan
Result	Displays the result of the activity.
Description	Displays the a description of the activity, if a description exists.

Control Manager Event Information

Displays information relating to Control Manager Server events. Examples: managed products registering to Control Manager, component updates, Activation Code deployments

TABLE B-14. Control Manager Event Information Data View

DATA	DESCRIPTION
Date/Time	Displays the that the event occurred.
Event Type	Displays the type of event that occurred. Example: notify TMI agent, server notify user, report service notify user

DATA	DESCRIPTION
Result	Displays the result of the event. Example: successful, unsuccessful
Description	Displays the description of the activity, if a description exists.

Command Tracking Information

Displays information relating to commands Control Manager delivers to managed products. Examples: managed products registering to Control Manager, component updates, Activation Code deployments

TABLE B-15. Command Tracking Information Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the issuer of the command issues the command.
Command Type	Displays the type of command issued. Example: scheduled update, Activation Code deployment
Command Parameter	Displays the specific information relating to the command. Example: specific pattern file name, specific Activation Code
User	Displays the user who issued the command.
Updated	Displays the time of the latest status check of all commands for the selected Control Manager.
Successful	Displays the number of successful commands.
Unsuccessful	Displays the number of unsuccessful commands.
In Progress	Displays the number of commands that are still in progress.
All	Displays the total number of commands (Successful + Unsuccessful + In progress).

Detailed Command Tracking Information

Displays detailed information relating to commands. Examples: managed products registering to Control Manager, component updates, Activation Code deployments

TABLE B-16. Detailed Command Tracking Information Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the command was issued.
Command Type	Displays the type of command issued. Example: scheduled update, Activation Code deployment
Command Parameter	Displays the specific information relating to the command. Example: specific pattern file name, specific Activation Code
Product Entity	Displays the managed product to which the command was issued.
User	Displays the user who issued the command.
Command Status	Displays the status of the command: successful, unsuccessful, in progress
Updated	Displays the time of the latest status check of all commands for the selected Control Manager.
Result Detail Description	Displays the description Control Manager provides for events.

Data View: Security Threat Information

Displays information about security threats that managed products detect: viruses, spyware/grayware, phishing sites, and more.

Virus/Malware Information

Displays summary and detailed data about malware/viruses that managed products detect on your network.

Overall Virus/Malware Summary

Provides overall specific summary for virus/malware detections. Example: name of virus/malware, number of endpoints affected by the virus, total number of instances of the virus on the network

TABLE B-17. Overall Virus/Malware Summary Data View

DATA	DESCRIPTION
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Unique Endpoints	Displays the number of unique computers affected by the virus/malware. Example: OfficeScan detects 10 virus instances of the same virus on 3 different computers. Unique Endpoints = 3
Unique Sources	Displays the number of unique infection sources where viruses/malware originate. Example: OfficeScan detects 10 virus instances of the same virus originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Overall Virus/Malware Type Summary

Provides broad summary for virus/malware detections. Example: type of virus/malware (Trojans, hacking tools), number of unique viruses/malware on your network, total number of instances of viruses/malware on the network

TABLE B-18. Overall Virus/Malware Type Summary Data View

DATA	DESCRIPTION
Unique Detections	Displays the number of unique virus/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Unique Detections = 1
Unique Endpoints	Displays the number of unique computers affected by the virus/malware. Example: OfficeScan detects 10 virus instances of the same virus on 3 different computers. Unique Endpoints = 3
Unique Sources	Displays the number of unique infection sources where viruses/malware originate. Example: OfficeScan detects 10 virus instances of the same virus originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Virus/Malware Source Summary

Provides a summary of virus/malware detections from the source of the outbreak.

Example: name of source computer, number of specific virus/malware instances from the source computer, total number of instances of viruses/malware on the network

TABLE B-19. Virus/Malware Source Summary Data View

DATA	DESCRIPTION
Source Host	Displays the IP address or host name of the computer where viruses/malware originate.
Unique Endpoints	Displays the number of unique computers affected by the virus/malware. Example: OfficeScan detects 10 virus instances of the same virus on 3 different computers. Unique Detections = 3
Unique Detections	Displays the number of unique virus/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Virus/Malware Endpoint Summary

Provides a summary of virus/malware detections from specific endpoints. Example: name of endpoint, number of specific virus/malware instances on the endpoint, total number of instances of viruses/malware on the network

TABLE B-20. Virus/Malware Endpoint Summary Data View

DATA	DESCRIPTION
Endpoint	Displays the IP address or host name of the computer affected by viruses/malware.

DATA	DESCRIPTION
Unique Sources	Displays the number of unique infection sources where viruses/malware originate. Example: OfficeScan detects 10 virus instances of the same virus originating from 2 infection sources. Unique Sources = 2
Unique Detections	Displays the number of unique virus/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Unique Detections = 1
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Web Violation Detection Over Time Summary

Provides a summary of web violation detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, number of endpoints in violation, the total number of web violations on the network

TABLE B-21. Web Violation Detection Over Time Summary Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the summary of the data occurs.
Unique Policies	Displays the number of the policies in violation. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies = 1

DATA	DESCRIPTION
Unique Endpoints	Displays the number of unique endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on 4 computers. Unique URLs = 1
Unique URLs	Displays the number of unique URLs in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on one computer. Unique URLs = 1
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Virus/Malware Action/Result Summary

Provides a summary of the actions managed products take against viruses/malware.
 Example: specific actions taken against viruses/malware, the result of the action taken, total number of instances of viruses/malware on the network

TABLE B-22. Virus/Malware Action/Result Summary Data View

DATA	DESCRIPTION
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted

DATA	DESCRIPTION
Unique Endpoints	Displays the number of unique computers affected by the virus/malware. Example: OfficeScan detects 10 virus instances of the same virus on 3 different computers. Unique Endpoints = 3
Unique Sources	Displays the number of unique infection sources where viruses/malware originate. Example: OfficeScan detects 10 virus instances of the same virus originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Detailed Virus/Malware Information

Provides specific information about the virus/malware instances on your network.
 Example: the managed product which detects the viruses/malware, the name of the virus/malware, the name of the endpoint with viruses/malware

TABLE B-23. Detailed Virus/Malware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint MAC	This data column displays one of the following: - The MAC address of the server on which the managed product installs. - The MAC address of a computer with a client (for example OfficeScan client) installed.
Managing Server Entity	Displays the entity display name of the managed product server to which an endpoint is registered.
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Endpoint	Displays the IP address or host name of the computer affected by viruses/malware.
Source	Displays the IP address or host name of the computer where viruses/malware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects viruses/malware.

DATA	DESCRIPTION
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections =10
Entry Type	Displays the entry point for the virus/malware that managed products detect. Example: virus found in file, HTTP, Windows Live Messenger (MSN)
Detailed Information	Used only for Ad Hoc Queries. Displays detailed information about the selection. In Ad Hoc Queries this column displays the selection as underlined. Clicking the underlined selection displays more information about the selection. Example: Host Details, Network Details, HTTP/FTP Details

Detailed Endpoint Virus/Malware Information

Provides specific information about the virus/malware instances found on endpoints.
Example: the managed product that detects the viruses/malware, the type of scan that detects the virus/malware, the file path on the endpoint to detected viruses/malware

TABLE B-24. Endpoint Virus/Malware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Managing Server Entity	Displays the entity display name of the managed product server to which an endpoint is registered.
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Endpoint	Displays the name of the computer affected by viruses/malware.
User	Displays the user name logged on to the endpoint computer when a managed product detects viruses/malware.
Scan Type	Displays the type of scan the managed product uses to detect the virus/malware. Example: Real-time, scheduled, manual
File	Displays the name of the file managed products detect affected by viruses/malware.

DATA	DESCRIPTION
File Path	Displays the file path on the endpoint computer where managed products detect the virus/malware.
File in Compressed File	Displays the name of the infected file/virus/malware in a compressed file.
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Web Virus/Malware Information

Provides specific information about the virus/malware instances found in HTTP or FTP traffic. Example: the managed product that detects the viruses/malware, the direction of traffic where the virus/malware occurs, the Internet browser or FTP endpoint that downloads the virus/malware.

TABLE B-25. Web Virus/Malware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Endpoint	Displays the IP address or host name of the computer on which managed products detect viruses/malware.
Source URL	Displays the URL of the web/FTP site which the virus/malware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects viruses/malware.
Traffic/Connection	Displays the direction of virus/malware entry.
Browser/FTP Client	Displays the Internet browser or FTP endpoint where the viruses/malware originates.
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Email Virus/Malware Information

Provides specific information about the virus/malware instances found in email messages. Example: the managed product that detects the viruses/malware, the subject line content of the email message, the sender of the email message that contains viruses/malware

TABLE B-26. Email Virus/Malware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Recipient	Displays the recipient of the email message containing viruses/malware.
Sender	Displays the sender of email message containing viruses/malware.
User	Displays the user name logged on to the endpoint computer when a managed product detects viruses/malware.
Subject	Displays the content of the subject line of the email message containing viruses/malware.
File	Displays the name of the file managed products detect affected by viruses/malware.
File in Compressed File	Displays the name of the infected file/virus/malware in a compressed file.

DATA	DESCRIPTION
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Network Virus/Malware Information

Provides specific information about the virus/malware instances found in network traffic. Example: the managed product that detects the viruses/malware, the protocol the virus/malware uses to enter your network, specific information about the source and destination of the virus/malware

TABLE B-27. Network Virus/Malware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.

DATA	DESCRIPTION
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Virus/Malware	Displays the name of viruses/malware managed products detect. Example: NIMDA, BLASTER, I_LOVE_YOU.EXE
Endpoint	Displays the IP address/ host name of the computer affected by viruses/malware.
Source Host	Displays the IP address or host name of the computer where viruses/malware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects viruses/malware.
Traffic/Connection	Displays the direction of virus/malware entry.
Protocol	Displays the protocol that the virus/malware uses to enter the network. Example: HTTP, SMTP, FTP
Endpoint Computer	Displays the computer name of the computer affected by viruses/ malware.
Endpoint Port	Displays the port number of the computer affected by viruses/ malware.
Endpoint MAC	Displays the MAC address of the computer affected by viruses/ malware.
Source Computer	Displays the computer name of the computer where viruses/ malware originates.
Source Port	Displays the port number of the computer where viruses/malware originates.
Source MAC	Displays the MAC address of the computer where viruses/ malware originates.
File	Displays the name of the file managed products detect affected by viruses/malware.

DATA	DESCRIPTION
Result	Displays the results of the action managed products take against viruses/malware. Example: successful, further action required
Action	Displays the type of action managed products take against viruses/malware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of viruses/malware managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Spyware/Grayware Information

Displays summary and detailed data about spyware/grayware that managed products detect on your network.

Overall Spyware/Grayware Summary

Provides overall specific summary for spyware/grayware detections. Example: name of spyware/grayware, number of endpoints affected by the spyware/grayware, total number of instances of the spyware/grayware on the network

TABLE B-28. Overall Spyware/Grayware Summary Data View

DATA	DESCRIPTION
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Unique Endpoints	Displays the number of unique computers affected by the spyware/grayware. OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on 3 different computers. Unique Endpoints = 3

DATA	DESCRIPTION
Unique Sources	Displays the number of unique sources where spyware/grayware originates. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of spyware/grayware managed products detect.

Spyware/Grayware Source Summary

Provides a summary of spyware/grayware detections from the source of the outbreak.
 Example: name of source computer, number of specific spyware/grayware instances from the source computer, total number of instances of spyware/grayware on the network

TABLE B-29. Spyware/Grayware Source Summary Data View

DATA	DESCRIPTION
Source Host	Displays the name of the computer where spyware/grayware originates.
Unique Endpoints	Displays the number of unique computers affected by the spyware/grayware. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on 3 different computers. Unique Endpoints = 3
Unique Detections	Displays the number of unique spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Unique Detections = 1

DATA	DESCRIPTION
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Endpoint Spyware/Grayware Summary

Provides a summary of spyware/grayware detections from specific endpoints. Example: name of endpoint, number of specific spyware/grayware instances on the endpoint, total number of instances of spyware/grayware on the network

TABLE B-30. Endpoint Spyware/Grayware Summary Data View

DATA	DESCRIPTION
Endpoint	Displays the host name or IP address of the computer affected by spyware/grayware.
Unique Sources	Displays the number of unique sources where spyware/grayware originates. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware originating from 2 infection sources. Unique Sources = 2
Unique Detections	Displays the number of unique spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Unique Detections = 1

DATA	DESCRIPTION
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Spyware/Grayware Detection Over Time Summary

Provides a summary of spyware/grayware detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, number of endpoints affected by the spyware/grayware, total number of instances of spyware/grayware on the network

TABLE B-31. Spyware/Grayware Detection Over Time Summary Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the summary of the data occurs.
Unique Detections	Displays the number of unique spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Unique Detections = 1
Unique Endpoints	Displays the number of unique computers affected by the spyware/grayware. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on 3 different computers. Unique Endpoints = 3

DATA	DESCRIPTION
Unique Sources	Displays the number of unique sources where spyware/grayware originates. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Spyware/Grayware Action/Result Summary

Provides a summary of the actions managed products take against spyware/grayware.
 Example: specific actions taken against spyware/grayware, the result of the action taken, total number of instances of spyware/grayware on the network

TABLE B-32. Spyware/Grayware Action/Result Summary Data View

DATA	DESCRIPTION
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted
Unique Endpoints	Displays the number of unique computers affected by the spyware/grayware. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on 3 different computers. Unique Endpoints = 3

DATA	DESCRIPTION
Unique Sources	Displays the number of unique sources where spyware/grayware originates. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware originating from 2 infection sources. Unique Sources = 2
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Detailed Spyware/Grayware Information

Provides specific information about the spyware/grayware instances on your network.
 Example: the managed product that detects the spyware/grayware, the name of the spyware/grayware, the name of the endpoint with spyware/grayware

TABLE B-33. Detailed Spyware/Grayware Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange

DATA	DESCRIPTION
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product/Endpoint MAC	This data column displays one of the following: - The MAC address of the server on which the managed product installs. - The MAC address of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Managing Server Entity	Displays the entity display name of the managed product server to which an endpoint is registered.
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Endpoint	Displays the IPaddress or host name of the computer affected by spyware/grayware.
Source Host	Displays the IPaddress or host name of the computer where spyware/grayware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects spyware/grayware.
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted

DATA	DESCRIPTION
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10
Entry Type	Displays the entry point for the spyware/grayware that managed products detect. Example: virus found in file, HTTP, Windows Live Messenger (MSN)
Detailed Information	Used only for Ad Hoc Queries. Displays detailed information about the selection. In Ad Hoc Queries this column displays the selection as underlined. Clicking the underlined selection displays more information about the selection. Example: Host Details, Network Details, HTTP/FTP Details

Detailed Endpoint Spyware/Grayware

Provides specific information about the spyware/grayware instances found on endpoints. Example: the managed product that detects the spyware/grayware, the type of scan that detects the spyware/grayware, the file path on the endpoint to detected spyware/grayware

TABLE B-34. Endpoint Spyware/Grayware Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Managing Server Entity	Displays the entity display name of the managed product server to which an endpoint is registered.
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Endpoint	Displays the IPaddress or host name of the computer affected by spyware/grayware.
Source Host	Displays the IPaddress or host name of the computer where the spyware/grayware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects spyware/grayware.
Scan Type	Displays the type of scan the managed product uses to detect the spyware/grayware. Example: Real-time, scheduled, manual

DATA	DESCRIPTION
Resource	Displays the specific resource affected. Example: application.exe, H Key Local Machine\SOFTWARE\ACME
Resource Type	Displays the type of resource affected by spyware/grayware. Example: registry, memory resource
Security Threat Type	Displays the specific type of spyware/grayware managed products detect. Example: adware, COOKIE, peer-to-peer application
Risk Level	Displays the Trend Micro-defined level of risk the spyware/grayware poses to your network. Example: High security, Medium security, Low security
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted

Web Spyware/Grayware

Provides specific information about the spyware/grayware instances found in HTTP or FTP traffic. Example: the managed product that detects the spyware/grayware, the direction of traffic where the spyware/grayware occurs, the Internet browser or FTP endpoint that downloads the spyware/grayware

TABLE B-35. Web Spyware/Grayware Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.

DATA	DESCRIPTION
Generated	Displays the time that the managed product generates data.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Endpoint	Displays the IP address or host name of the computer on which managed products detect spyware/grayware.
Source URL	Displays the URL of the web/FTP site which the spyware/grayware originates.
Traffic/Connection	Displays the direction of spyware/grayware entry.
Browser/FTP Client	Displays the Internet browser or FTP endpoint where the spyware/grayware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects spyware/grayware.
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted

DATA	DESCRIPTION
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Email Spyware/Grayware

Provides specific information about the spyware/grayware instances found in email messages. Example: the managed product that detects the spyware/grayware, the subject line content of the email message, the sender of the email message that contains spyware/grayware

TABLE B-36. Email Spyware/Grayware Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Recipient	Displays the recipient of the email message containing spyware/grayware.
Sender	Displays the sender of email message containing spyware/grayware.

DATA	DESCRIPTION
User	Displays the user name logged on to the endpoint computer when a managed product detects spyware/grayware.
Subject	Displays the content of the subject line of the email message containing spyware/grayware.
File	Displays the name of the file managed products detect affected by spyware/grayware.
File in Compressed File	Displays the file name of the spyware/grayware occurring in a compressed file.
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Network Spyware/Grayware

Provides specific information about the spyware/grayware instances found in network traffic. Example: the managed product that detects the spyware/grayware, the protocol the spyware/grayware uses to enter your network, specific information about the source and destination of the spyware/grayware

TABLE B-37. Network Spyware/Grayware Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed, that is affected by spyware/grayware.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Spyware/Grayware	Displays the name of spyware/grayware managed products detect.
Traffic/Connection	Displays the direction of spyware/grayware entry.
Protocol	Displays the protocol that the spyware/grayware uses to enter the network. Example: HTTP, SMTP, FTP
Endpoint IP	Displays the IP address of the computer affected by spyware/grayware.
Endpoint	Displays the IP address or host name of the computer affected by spyware/grayware.
Endpoint Port	Displays the port number of the computer affected by spyware/grayware.
Endpoint MAC	Displays the MAC address of the computer affected by spyware/grayware.
Source IP	Displays the IP address of the computer where spyware/grayware originates.
Source Host	Displays the host name of the computer where spyware/grayware originates.

DATA	DESCRIPTION
Source Port	Displays the port number of the computer where spyware/grayware originates.
Source MAC	Displays the MAC address of the computer where spyware/grayware originates.
User	Displays the user name logged on to the endpoint computer when a managed product detects spyware/grayware.
File	Displays the name of the file managed products detect affected by spyware/grayware.
Result	Displays the results of the action managed products take against spyware/grayware. Example: successful, further action required
Action	Displays the type of action managed products take against spyware/grayware. Example: File cleaned, File quarantined, File deleted
Detections	Displays the total number of spyware/grayware managed products detect. Example: OfficeScan detects 10 spyware/grayware instances of the same spyware/grayware on one computer. Detections = 10

Content Violation Information

Displays summary and detailed data about prohibited content that managed products detect on your network.

Content Violation Policy Summary

Provides a summary of content violation detections due to specific policies. Example: name of the policy in violation, the type of filter that detects the content violation, the total number of content violations on the network

TABLE B-38. Content Violation Policy Summary Data View

DATA	DESCRIPTION
Policy	Displays the name of the policy that endpoints violate.
Filter Type	Displays the type of filter that triggers the violation. Example: content filter, phishing filter, URL reputation filter
Unique Senders/ Users	Displays the number of unique email message addresses or users sending content that violates managed product policies. Example: A managed product detects 10 violation instances of the same policy coming from 3 computers. Unique Senders/Users = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product policies. Example: A managed product detects 10 violation instances of the same policy on 2 computers. Unique Recipients = 2
Detections	Displays the total number of policy violations managed products detect. Example: A managed product detects 10 violation instances of the same policy on one computer. Detections = 10

Content Violation Sender Summary

Provides a summary of content violation detections due to specific senders. Example: name of the content sender, the number of unique content violations, the total number of content violations on the network

TABLE B-39. Content Violation Sender Summary Data View

DATA	DESCRIPTION
Sender/User	Displays the email message address or users sending content that violates managed product policies.

DATA	DESCRIPTION
Detections	Displays the total number of policy violations managed products detect. Example: A managed product detects 10 violation instances of the same policy on one computer. Detections = 10
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product policies. Example: A managed product detects 10 violation instances of the same policy on 2 computers. Unique Recipients = 2
Unique Policies	Displays the number of unique policies in violation managed products detect. Example: A managed product detects 10 violation instances of the same policy on one computer. Detections = 10

Content Violation Detection Over Time Summary

Provides a summary of content violation detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, number of endpoints affected by the content violation, total number of unique content violations and total number of content violations on the network

TABLE B-40. Content Violation Detection Over Time Summary Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the summary of the data occurs.

DATA	DESCRIPTION
Unique Policies	Displays the number of unique policies in violation managed products detect. Example: A managed product detects 10 violation instances of the same policy on one computer. Detections = 10
Unique Senders/ Users	Displays the number of unique email message addresses or users sending content that violates managed product policies. Example: A managed product detects 10 violation instances of the same policy coming from 3 computers. Unique Senders/Users = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product policies. Example: A managed product detects 10 violation instances of the same policy on 2 computers. Unique Recipients = 2
Detections	Displays the total number of policy violations managed products detect. Example: A managed product detects 10 violation instances of the same policy on one computer. Detections = 10

Content Violation Action/Result Summary

Provides a summary of actions managed products take against content violations.

Example: the action managed products take against the content violation, the number of email messages affected by the action taken

TABLE B-41. Content Violation Action/Result Summary Data View

DATA	DESCRIPTION
Action	Displays the type of action managed products take against email message in violation of content policies. Example: forwarded, attachments stripped, deleted
Detections	Displays the number of violations with the specified action taken by managed products.

Detailed Content Violation Information

Provides specific information about the content violations on your network. Example: the managed product that detects the content violation, the name of the specific policy in violation, the total number of content violations on the network

TABLE B-42. Detailed Content Violation Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Recipient	Displays the email recipients receiving content that violate managed product policies.
Sender/User	Displays the email address or user sending content that violates managed product policies.
Subject	Displays the content of the subject line of the email that violates a policy.
Policy	Displays the name of the policy an email violates.

DATA	DESCRIPTION
Policy Settings	Displays the settings for the policy that an email violates.
File Location	Displays the location of the file that violates a policy.
File	Displays the name of the file that violates a policy.
URL	Displays the URL in violation of the specified policy.
Risk Level	Displays the Trend Micro assessment of risk to your network. Example: high security, low security, medium security
Filter Type	Displays the type of filter that detects the email in violation. Example: content filter, size filter, attachment filter
Filter Action	Displays the action the detecting filter takes against email in violation of a policy. Example: clean, quarantine, strip
Action	Displays the type of action managed products take against email in violation of content policies. Example: deliver, strip, forward
Detections	Displays the total number of policy violations managed products detect.

Spam Violation Information

Displays summary and detailed data about spam that managed products detect on your network.

Spam Recipient Summary

Provides a summary of spam violations on specific endpoints. Example: name of endpoint, total number of instances of viruses/malware on the endpoint

TABLE B-43. Spam Recipient Summary Data View

DATA	DESCRIPTION
Recipient	Displays the name of the recipient who receives spam.
Detections	Displays the total number of spam violations managed products detect. Example: A managed product detects 10 violation instances of the same spam on one computer. Detections = 10

Spam Detection Over Time Summary

Provides a summary of spam detections over a period of time (daily, weekly, monthly).
 Example: time and date of when summary data was collected, number of endpoints affected by spam, the total number of spam violations on the network

TABLE B-44. Spam Detection Over Time Summary Data View

DATA	DESCRIPTION
Summary Time	Displays the time that the summary of the data occurs.
Unique Recipient Domains	Displays the total number of unique recipient domains affected by spam. Example: A managed product detects 10 violation instances of the same spam from 2 domains on 1 recipient domain. Unique Recipient Domains = 1
Unique Recipients	Displays the number of unique recipients receiving spam from the specified domain. Example: A managed product detects 10 violation instances of spam from the same domain on 3 computers. Unique Recipients = 3

DATA	DESCRIPTION
Detections	Displays the total number of spam violations managed products detect. Example: A managed product detects 10 violation instances of the same spam on one computer. Detections = 10

Detailed Spam Information

Provides specific information about the spam violations on your network. Example: the managed product that detects the content violation, the name of the specific policy in violation, the total number of spam violations on the network

TABLE B-45. Detailed Spam Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Recipient	Displays the recipients of email containing spam.
Sender	Displays the sender of email containing spam.
Subject	Displays the content of the subject line of the email containing spam.
Policy	Displays the name of the policy the email violates.

DATA	DESCRIPTION
Action	Displays the type of action managed products take against spam found in email. Example: deliver, forward, strip
Detections	Displays the total number of spam violations managed products detect. Example: A managed product detects 10 violation instances of the same spam on one computer. Detections = 10

Spam Connection Information

Provides specific information about the source of spam on your network. Example: the managed product that detects the spam violation, the specific action managed products take against spam violations, the total number of spam violations on the network

TABLE B-46. Spam Connection Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Source IP	Displays the IP address of the mail server where spam originates.
Filter Type	Displays the type of filter that detects the email in violation. Example: Real-time Blackhole List (RBL+), Quick IP List (QIL)

DATA	DESCRIPTION
Action	Displays the type of action managed products take against spam to prevent spam from entering the email server. Example: drop connection, bypass connection
Detections	Displays the total number of spam violations managed products detect. Example: A managed product detects 10 violation instances of the same spam on one computer. Detections = 10

Policy/Rule Violation Information

Displays summary and detailed data about policy/rule violations that managed products detect on your network.

Detailed Firewall Violation Information

Provides specific information about the firewall violations on your network. Example: the managed product that detects the firewall violation, specific information about the source and destination, the total number of firewall violations on the network

TABLE B-47. Detailed Firewall Violation Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.

DATA	DESCRIPTION
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed, that is under attack.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Event Type	Displays the type of event that triggers the violation. Example: intrusion, policy violation
Risk Level	Displays the Trend Micro assessment of risk to your network. Example: high security, low security, medium security
Traffic/Connection	Displays the direction of violation entry.
Protocol	Displays the protocol the intrusion uses. Example: HTTP, SMTP, FTP
Source IP	Displays the IP address of the computer attempting an intrusion on your network.
Endpoint Port	Displays the port number of the computer under attack.
Endpoint IP	Displays the IP address of the computer under attack.
Target Application	Displays the application the intrusion targets.
Description	Detailed description of the incident by Trend Micro.
Action	Displays the type of action managed products take against policy violations. Example: file cleaned, file quarantined, file passed

DATA	DESCRIPTION
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Security Threat Endpoint Analysis Information

Displays information with affected endpoints as the focus. Examples: name of the endpoint, the broad range of how the security threat enters your network, number of endpoints affected

TABLE B-48. Security Threat Endpoint Analysis Information Data View

DATA	DESCRIPTION
Endpoint	Displays the name of the computer affected by the security threat/violation.
Security Threat Category	Displays the broad category of the security threat managed products detect. Example: Antivirus, Antispyware, Antiphishing
Security Threat Name	Displays the name of security threat managed products detect.
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10
Detected	Displays the time and date of the last security threat/violation detection on the computer affected the security threat/violation.

Detailed Endpoint Security Compliance Information

Provides specific information about the endpoint security compliance instances on your network. Example: the managed product that detects the security compliance, the name of the specific policy in compliance, the total number of security compliances on the network

TABLE B-49. Detailed Endpoint Security Compliance Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Endpoint	Displays the host name of the computer in compliance of the policy/rule.
Endpoint IP	Displays the IP address of the computer in compliance of the policy/rule.
Endpoint MAC	Displays the MAC address of the computer in compliance of the policy/rule.
Policy/Rule	Displays the name of the policy/rule in compliance.
Service	Displays the name of the service/program in compliance of the policy/rule.
User	Displays the user name logged on to the endpoint when a managed product detects a policy/rule compliance.
Description	Detailed description of the incident by Trend Micro.

DATA	DESCRIPTION
Detections	Displays the total number of policy/rule compliances managed products detect. Example: A managed product detects 10 compliance instances of the same type on one computer. Detections = 10

Detailed Application Activity

Displays overall information about application activity on your network. Example: the managed product which detects the security compliance, the name of the specific policy in compliance, the total number of security compliances on the network

TABLE B-50. Detailed Application Activity Data View

DATA	DESCRIPTION
Received	The time at which Control Manager receives data from the managed product.
Generated	The time at which the managed product generates data.
Product Entity	The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	The name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
VLAN ID	Displays the VLAN ID (VID) of the source from which the suspicious threat originates.
Detected By	Displays the filter, scan engine, or managed product which detects the suspicious threat.
Traffic/Connection	Displays the direction of network traffic or the position on the network the suspicious threat originates.

DATA	DESCRIPTION
Protocol Group	Displays the broad protocol group from which a managed product detects the suspicious threat. Example: FTP, HTTP, P2P
Protocol	Displays the protocol from which a managed product detects the suspicious threat. Example: ARP, Bearshare, BitTorrent
Description	Detailed description of the incident by Trend Micro.
Endpoint	Displays the host name of the computer in compliance of the policy/rule.
Source IP	Displays the IP address of the source from which the suspicious threat originates.
Source MAC	Displays the MAC address of the source from which the suspicious threat originates.
Source Port	Displays the port number of the source from which the suspicious threat originates.
Source IP Group	Displays the IP address group of the source where the violation originates.
Source Network Zone	Displays the network zone of the source where the violation originates.
Endpoint IP	Displays the IP address of the endpoint the suspicious threat affects.
Endpoint Port	Displays the port number of the endpoint the suspicious threat affects.
Endpoint MAC	Displays the MAC address of the endpoint the suspicious threat affects.
Endpoint Group	Displays the IP address group of the endpoint the suspicious threat affects.
Endpoint Network Zone	Displays the network zone of the endpoint the suspicious threat affects.

DATA	DESCRIPTION
Policy/Rule	Displays the policy/rule the suspicious threat violates.
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Web Violation/Reputation Information

Displays summary and detailed data about Internet violations that managed products detect on your network.

Overall Web Violation Summary

Provides a summary of web violations of specific policies. Example: name of the policy in violation, the type of filter/blocking to stop access to the URL, the total number of web violations on the network

TABLE B-51. Overall Web Violation Summary Data View

DATA	DESCRIPTION
Policy	Displays the name of the policy the URL violates.
Filter/Blocking Type	Displays the type of filter/blocking preventing access to the URL in violation. Example: URL blocking, URL filtering, web blocking
Unique Endpoints	Displays the number of unique endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on 4 computers. Unique Endpoints = 4

DATA	DESCRIPTION
Unique URLs	Displays the number of unique URLs in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on one computer. Unique URLs = 1
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on 1 computer. Detections = 10

Web Violation Endpoint Summary

Provides a summary of web violation detections from a specific endpoint. Example: IP address of the endpoint in violation, number of policies in violation, the total number of web violations on the network

TABLE B-52. Web Violation Endpoint Summary Data View

DATA	DESCRIPTION
Endpoint	Displays the IP address or host name of endpoints in violation of web policies.
Unique Policies	Displays the number of the policies in violation. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies = 1
Unique URLs	Displays the number of unique URLs in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on one computer. Unique URLs = 1

DATA	DESCRIPTION
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Web Violation URL Summary

Provides a summary of web violation detections from specific URLs. Example: name of the URL causing the web violation, the type of filter/blocking to stop access to the URL, the total number of web violations on the network

TABLE B-53. Web Violation URL Summary Data View

DATA	DESCRIPTION
URL	Displays the URL violating a web policy.
Filter/Blocking Type	Displays the type of filter/blocking preventing access to the URL in violation. Example: URL blocking, URL filtering, web blocking
Unique Endpoints	Displays the number of unique endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on 4 computers. Unique Endpoints = 4
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Web Violation Filter/Blocking Type Summary

Provides a summary of the action managed products take against web violations.
Example: the type of filter/blocking to stop access to the URL, the total number of web violations on the network

TABLE B-54. Web Violation Filter/Blocking Type Summary Data View

DATA	DESCRIPTION
Blocking Category	Displays the broad type of filter/blocking preventing access to the URL in violation. Example: URL blocking, URL filtering, Anti-spyware
Filter/Blocking Type	Displays the specific type of filter/blocking preventing access to the URL in violation. Example: URL blocking, URL filtering, Virus/Malware
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Web Violation Detection Over Time Summary

Provides a summary of web violation detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, number of endpoints in violation, the total number of web violations on the network

TABLE B-55. Web Violation Detection Over Time Summary Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the summary of the data occurs.

DATA	DESCRIPTION
Unique Policies	Displays the number of the policies in violation. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies = 1
Unique Endpoints	Displays the number of unique endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on 4 computers. Unique URLs = 1
Unique URLs	Displays the number of unique URLs in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on one computer. Unique URLs = 1
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Web Violation Detection Summary

Provides a summary of web violation detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, number of endpoints in violation, the total number of web violations on the network

TABLE B-56. Web Violation Detection Summary Data View

DATA	DESCRIPTION
Unique Policies	Displays the number of the policies in violation. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies = 1
Unique Endpoints	Displays the number of unique endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on 4 computers. Unique Endpoints = 4
Unique URLs	Displays the number of unique URLs in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL on one computer. Unique URLs = 1
Unique Users/IPs	Displays the number of unique users or IP addresses of endpoints in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL from one user. Unique Users/IPs = 1
Unique User Groups	Displays the number of unique user groups for users in violation of the specified policy. Example: A managed product detects 10 violation instances of the same URL from one user group. Unique User Groups = 1

DATA	DESCRIPTION
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Detailed Web Violation Information

Provides specific information about the web violations on your network. Example: the managed product that detects the web violation, the name of the specific policy in violation, the total number of web violations on the network

TABLE B-57. Detailed Web Violation Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Traffic/Connection	Displays the direction of violation entry.
Protocol	Displays the protocol over which the violation takes place. Example: HTTP, FTP, SMTP
URL	Displays the name of the URL that violates a web policy.
User/IP	Displays the user or IP address of the endpoint that violates a policy.
User Group	Displays the user group for the user that violates a policy.

DATA	DESCRIPTION
Endpoint	Displays the IP address or host name of the endpoint that violates a policy.
Product Host	Displays the IP address or host name of the managed product which detects the violation.
Filter/Blocking Type	Displays the type of filter/blocking preventing access to the URL in violation. Example: URL blocking, URL filtering, web blocking
Blocking Rule	Displays the blocking rule preventing access to the URL in violation. Example: URL blocking
Policy	Displays the name of the policy the URL violates.
File	Displays the name of the file that violates the policy.
Web Reputation Rating	Displays the relative safety, as a percentage, of a website according to Trend Micro.
Action	Displays the type of action managed products take against policy violations. Example: pass, block
Detections	Displays the total number of web violations managed products detect. Example: A managed product detects 10 violation instances of the same URL on one computer. Detections = 10

Detailed Web Reputation Information

Displays overall information about application activity on your network. Example: the managed product that detects the security compliance, the name of the specific policy in compliance, the total number of security compliances on the network

TABLE B-58. Detailed Web Reputation Information Data View

DATA	DESCRIPTION
Received	The time at which Control Manager receives data from the managed product.
Generated	The time at which the managed product generates data.
Product Entity	The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	The name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
VLAN ID	Displays the VLAN ID (VID) of the source from which the suspicious threat originates.
Detected By	Displays the filter, scan engine, or managed product which detects the suspicious threat.
Traffic/Connection	Displays the direction of network traffic or the position on the network the suspicious threat originates.
Protocol Group	Displays the broad protocol group from which a managed product detects the suspicious threat. Example: FTP, HTTP, P2P
Protocol	Displays the protocol from which a managed product detects the suspicious threat. Example: ARP, Bearshare, BitTorrent
Description	Detailed description of the incident by Trend Micro.
Endpoint	Displays the host name of the computer in compliance of the policy/rule.
Source IP	Displays the IP address of the source from which the suspicious threat originates.
Source MAC	Displays the MAC address of the source from which the suspicious threat originates.

DATA	DESCRIPTION
Source Port	Displays the port number of the source from which the suspicious threat originates.
Source IP Group	Displays the IP address group of the source where the suspicious threat originates.
Source Network Zone	Displays the network zone of the source where the suspicious threat originates.
Endpoint IP	Displays the IP address of the endpoint the suspicious threat affects.
Endpoint Port	Displays the port number of the endpoint the suspicious threat affects.
Endpoint MAC	Displays the MAC address of the endpoint the suspicious threat affects.
Endpoint Group	Displays the IP address group of the endpoint the suspicious threat affects.
Endpoint Network Zone	Displays the network zone of the endpoint the suspicious threat affects.
Policy/Rule	Displays the policy/rule the suspicious threat violates.
URL	Displays the URL considered a suspicious threat.
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Threat Information

Displays summary and detailed data about suspicious activity that managed products detect on your network.

Overall Suspicious Threat Summary

Provides specific information about suspicious threats on your network. Example: the policy/rule in violation, summary information about the source and destination, the total number of suspicious threats on the network

TABLE B-59. Overall Suspicious Threat Summary Data View

DATA	DESCRIPTION
Policy/Rule	Displays the name of the policy/rule in violation.
Protocol	Displays the protocol over which the violation takes place. Example: HTTP, FTP, SMTP
Unique Endpoints	Displays the number of unique computers affected by the suspicious threat. Example: A managed product detects 10 suspicious threat instances of the same type on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique sources where suspicious threats originate. Example: A managed product detects 10 suspicious threat instances of the same type originating from 3 computers. Unique Sources = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy on 2 computers. Unique Recipients = 2

DATA	DESCRIPTION
Unique Senders	Displays the number of unique email message senders sending content that violates managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy coming from 3 computers. Unique Senders = 3
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections equals 10.
Mitigations	Displays the number of endpoints Network VirusWall Enforcer devices or Total Discovery Mitigation Server take action against.
Cleaned Endpoints	Displays the total number of endpoints Total Discovery Mitigation Server cleans.
Clean Endpoint Rate (%)	Displays the percentage of endpoints Total Discovery Mitigation Server cleans compared to the total Detections.

Suspicious Source Summary

Provides a summary of suspicious threat detections from a specific source. Example: name of the source, summary information about the destination and rules/violations, the total number of suspicious threats on the network

TABLE B-60. Suspicious Source Summary Data View

DATA	DESCRIPTION
Source IP	Displays the IP addresses of sources where suspicious threats originate.

DATA	DESCRIPTION
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1
Unique Endpoints	Displays the number of unique computers affected by the suspicious threat. Example: A managed product detects 10 suspicious threat instances of the same type on 2 computers. Unique Endpoints = 2
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Riskiest Endpoints Summary

Provides a summary of the endpoints with the most suspicious threat detections.

Example: name of the destination, summary information about the source and rules/violations, the total number of suspicious threats on the network

TABLE B-61. Suspicious Threat Riskiest Endpoints Summary Data View

DATA	DESCRIPTION
Endpoint IP	Displays the IP addresses of computers affected by suspicious threats.

DATA	DESCRIPTION
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1
Unique Sources	Displays the number of unique sources where suspicious threats originate. Example: A managed product detects 10 suspicious threat instances of the same type originating from 3 computers. Unique Sources = 3
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Riskiest Recipient Summary

Provides a summary of the recipients with the most suspicious threat detections.
Example: name of the recipient, summary information about the senders and rules/violations, the total number of suspicious threats on the network

TABLE B-62. Suspicious Riskiest Recipient Summary Data View

DATA	DESCRIPTION
Recipient	Displays the email address of the recipient affected by the suspicious threat.

DATA	DESCRIPTION
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1
Unique Senders	Displays the number of unique email message senders sending content that violates managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy coming from 3 computers. Unique Senders = 3
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Sender Summary

Provides a summary of suspicious threat detections from a specific sender. Example: name of the sender, summary information about the recipient and rules/violations, the total number of suspicious threats on the network

TABLE B-63. Suspicious Sender Summary Data View

DATA	DESCRIPTION
Sender	Displays the email address for the source of policy/rule violations.
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1

DATA	DESCRIPTION
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy on 2 computers. Unique Recipients = 2
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Threat Protocol Detection Summary

Provides a summary of suspicious threats detections over a specific protocol. Example: name of the protocol, summary information about the source and destination, the total number of suspicious threats on the network

TABLE B-64. Suspicious Threat Protocol Detection Summary Data View

DATA	DESCRIPTION
Protocol	Displays the name of the protocol over which the suspicious threat occurs. Example: HTTP, FTP, SMTP
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1

DATA	DESCRIPTION
Unique Endpoints	Displays the number of unique computers affected by the suspicious threat. Example: A managed product detects 10 suspicious threat instances of the same type on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique sources where suspicious threats originate. Example: A managed product detects 10 suspicious threat instances of the same type originating from 3 computers. Unique Sources = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy on 2 computers. Unique Recipients = 2
Unique Senders	Displays the number of unique email message senders sending content that violates managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy coming from 3 computers. Unique Senders = 3
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Suspicious Threat Detection Over Time Summary

Provides a summary of suspicious threats detections over a period of time (daily, weekly, monthly). Example: time and date of when summary data was collected, summary

information about the source and destination, the total number of suspicious threats on the network

TABLE B-65. Suspicious Threat Detection Over Time Summary Data View

DATA	DESCRIPTION
Date/Time	Displays the time that the summary of the data occurs.
Unique Policies/ Rules	Displays the number of unique policies/rules the source computer violates. Example: A managed product detects 10 policy violation instances of the same policy on 2 computers. Unique Policies/Rules = 1
Unique Endpoints	Displays the number of unique computers affected by the suspicious threat. Example: A managed product detects 10 suspicious threat instances of the same type on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique sources where suspicious threats originate. Example: A managed product detects 10 suspicious threat instances of the same type originating from 3 computers. Unique Sources = 3
Unique Recipients	Displays the number of unique email message recipients receiving content that violate managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy on 2 computers. Unique Recipients = 2

DATA	DESCRIPTION
Unique Senders	Displays the number of unique email message senders sending content that violates managed product suspicious threat policies. Example: A managed product detects 10 suspicious threat violation instances of the same policy coming from 3 computers. Unique Senders = 3
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Detailed Suspicious Threat Information

Provides specific information about suspicious threats on your network. Example: the managed product that detects the suspicious threat, specific information about the source and destination, the total number of suspicious threats on the network

TABLE B-66. Detailed Suspicious Threat Information Data View

DATA	DESCRIPTION
Received	Displays the time that Control Manager receives data from the managed product.
Generated	Displays the time that the managed product generates data.
Product Entity	Displays the entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Mitigation Host	Displays the host name for the mitigation server.
Traffic/Connection	Displays the direction of network traffic or the position on the network the suspicious threat originates.

DATA	DESCRIPTION
Protocol Group	Displays the broad protocol group from which a managed product detects the suspicious threat. Example: FTP, HTTP, P2P
Protocol	Displays the protocol from which a managed product detects the suspicious threat. Example: ARP, Bearshare, BitTorrent
Destination IP Address	Displays the IP address of the endpoint the suspicious threat affects.
Destination Port	Displays the port number of the endpoint the suspicious threat affects.
Destination MAC Address	Displays the MAC address of the endpoint the suspicious threat affects.
Source IP Address	Displays the IP address of the source where the suspicious threat originates.
Source Host Name	Displays the host name of the source where the suspicious threat originates.
Source Port	Displays the port number of the source where the suspicious threat originates.
Source MAC Address	Displays the MAC address of the source where the suspicious threat originates.
Source Domain	Displays the domain of the source where the suspicious threat originates.
VLAN ID	Displays the VLAN ID of the source where the suspicious threat originates.
Security Threat Type	Displays the specific type of security threat managed products detect. Example: virus, spyware/grayware, fraud
Threat Confidence Level	Displays Trend Micro's confidence that the suspicious threat poses a danger to your network.

DATA	DESCRIPTION
Detected By	Displays the filter, scan engine, or managed product which detects the suspicious threat.
Policy/Rule	Displays the policy/rule the suspicious threat violates.
Recipient	Displays the recipient of the suspicious threat.
Sender	Displays the sender of the suspicious threat.
Subject	Displays the content of the subject line of the email containing spyware/grayware.
URL	Displays the URL considered a suspicious threat.
User	Displays the user name logged on to the destination when a managed product detects a suspicious threat.
IM/IRC User	Displays the instant messaging or IRC user name logged on when Total Discovery Appliance detects a violation.
Browser/FTP Client	Displays the Internet browser or FTP endpoint where the suspicious threat originates.
Channel Name	Displays the protocol that the instant messaging software or IRC use for communication.
File	Displays the name of the suspicious file.
File in Compressed File	Displays whether the suspicious threat originates from a compressed file.
File Size	Displays the size of the suspicious file.
File Extension	Displays the file extension of the suspicious file. Example: .wmf, .exe, .zip
True File Type	Displays the "true" file type which is detected using the file's header not the file's extension.
Shared Folder	Displays whether the suspicious threat originates from a shared folder.
Authentication	Displays whether authentication was used.

DATA	DESCRIPTION
BOT Command	Displays the command that bots send or receive to or from the control channel.
BOT URL	Displays the URL that bots receive their commands from.
Constraint Type	Displays the reason that a file cannot be scanned correctly.
Mitigation Result	Displays the result of the action the mitigation server takes against suspicious threats.
Mitigation Action	Displays the action the mitigation server takes against suspicious threats. Example: File cleaned, File dropped, File deleted
Source IP Group	Displays the IP address group of the source where the suspicious threat originates.
Source Network Zone	Displays the network zone of the source where the suspicious threat originates.
Endpoint Group	Displays the IP address group of the endpoint the suspicious threat affects.
Endpoint Network Zone	Displays the network zone of the endpoint the suspicious threat affects.
Detections	Displays the total number of policy/rule violations managed products detect. Example: A managed product detects 10 violation instances of the same type on one computer. Detections = 10

Overall Threat Information

Displays summary and statistical data about the overall threat landscape of your network.

Network Security Threat Analysis Information

Displays information for overall security threats affecting your desktops. Examples: name of the security threat, total number of security threat detections, number of endpoints affected

TABLE B-67. Network Security Threat Analysis Information Data View

DATA	DESCRIPTION
Security Threat Category	Displays the broad category of the security threat managed products detect. Example: Antivirus, Antispyware, Antiphishing
Security Threat	Displays the name of security threat managed products detect.
Entry Type	Displays the entry point for the security threat that managed products detect. Example: virus found in file, HTTP, Windows Live Messenger (MSN)
Unique Endpoints	Displays the number of unique computers affected by the security threat/violation. Example: OfficeScan detects 10 virus instances of the same virus on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique computers where security threats/violations originate. Example: OfficeScan detects 10 virus instances of the same virus, coming from 3 sources, on 2 computers. Unique Sources = 3
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Network Protection Boundary Information

Displays information for a broad overview of security threats affecting your entire network. Examples: managed product network protection type (gateway, email), type of security threat, number of endpoints affected

TABLE B-68. Network Protection Boundary Information Data View

DATA	DESCRIPTION
Product Category	Displays the category to which the managed product belongs. Example: desktop products, mail server products, network products
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Security Threat Category	Displays the broad category of the security threat managed products detect. Example: Antivirus, Antispyware, Antiphishing
Unique Endpoints	Displays the number of unique computers affected by the security threat/violation. Example: OfficeScan detects 10 virus instances of the same virus on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique computers where security threats/violations originate. Example: OfficeScan detects 10 virus instances of the same virus, coming from 3 sources, on 2 computers. Unique Sources = 3
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Security Threat Entry Analysis Information

Displays information with the entry point of security threats as the focus. Examples: managed product network protection type (gateway, email, desktop), name of the security threat, time of the last security threat detection

TABLE B-69. Security Threat Entry Analysis Information Data View

DATA	DESCRIPTION
Entry Type	Displays the point of entry for security threats managed products detect. Example: Virus found in file, FTP, File transfer
Product	Displays the name of the managed product which detects the security threat. Example: OfficeScan, ScanMail for Microsoft Exchange
Security Threat Category	Displays the specific category for security threats managed products detect. Example: Antivirus, Antispyware, Content filtering
Unique Endpoints	Displays the number of unique computers affected by the security threat/violation. Example: OfficeScan detects 10 virus instances of the same virus on 2 computers. Unique Endpoints = 2
Unique Sources	Displays the number of unique computers where security threats/violations originate. Example: OfficeScan detects 10 virus instances of the same virus, coming from 3 sources, on 2 computers. Unique Sources = 3

DATA	DESCRIPTION
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10

Security Threat Source Analysis Information

Displays information with the security threat source as the focus. Examples: name of the security threat source, the broad range of how the security threat enters your network, number of endpoints affected

TABLE B-70. Security Threat Source Analysis Information Data View

DATA	DESCRIPTION
Source Host	Displays the name of the computer where the cause of the security threat/violation originates.
Security Threat Category	Displays the broad category of the security threat managed products detect. Example: Antivirus, Antispyware, Antiphishing
Security Threat	Displays the name of security threat managed products detect.
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10
Detected	Displays the time and date of the last security threat/violation detection on the computer affected the security threat/violation.

Security Threat Endpoint Analysis Information

Displays information with affected endpoints as the focus. Examples: name of the endpoint, the broad range of how the security threat enters your network, number of endpoints affected

TABLE B-71. Security Threat Endpoint Analysis Information Data View

DATA	DESCRIPTION
Endpoint	Displays the name of the computer affected by the security threat/violation.
Security Threat Category	Displays the broad category of the security threat managed products detect. Example: Antivirus, Antispyware, Antiphishing
Security Threat Name	Displays the name of security threat managed products detect.
Detections	Displays the total number of security threats/violations managed products detect. Example: OfficeScan detects 10 virus instances of the same virus on one computer. Detections = 10
Detected	Displays the time and date of the last security threat/violation detection on the computer affected the security threat/violation.

C&C Callback Information

Displays information on C&C callback details. Examples: name of the affected host or email address, type of the C&C list source.

TABLE B-72. C&C Callback Information Data View

DATA	DESCRIPTION
Received	Date and time when Control Manager receives data from the managed product

DATA	DESCRIPTION
Generated	Date and time when the managed product generates data
Compromised Host	Affected host or email address
Callback Address	URL, IP address, or email address to which a compromised host attempts a callback
C&C List Source	Name of the list that contains the callback address • Global Intelligence • Virtual Analyzer • User-defined
Attacker Groups	Names of the attacker groups monitored by Trend Micro
C&C Risk Level	Severity level of the callback
C&C Server Location	Region and country where the C&C server is located
First Monitored	Date and time when the managed product first logged the callback address
Last Activity	Date and time when the managed product last logged the callback address
Malware Families	Malware categories associated with the callback address
Product Entity	Display name for a managed product. Control Manager identifies managed products using the managed product's display name.
Product	Name of the managed product Examples: OfficeScan, ScanMail for Microsoft Exchange

Data View: Data Protection Information

Displays information about Data Loss Prevention (DLP), including DLP incidents and DLP template matches.

Data Loss Prevention Information

Displays information about DLP incidents, template matches, and incident sources collected from the managed products.

DLP Incident Information

TABLE B-73. DLP Incident Information

DATA	DESCRIPTION
Received	Displays the time when Control Manager received the log.
Generated	Displays the time when the log data was generated in the managed product.
Product Entity/ Endpoint	This data column displays one of the following: • The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. • The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product/Endpoint IP	This data column displays one of the following: • The IP address of the server on which the managed product installs. • The IP address of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint MAC	This data column displays one of the following: • The MAC address of the server on which the managed product installs. • The MAC address of a computer with a client (for example OfficeScan client) installed.

DATA	DESCRIPTION
Managing Server	Displays the entity display name for a managed product to which an endpoint is registered. Control Manager identifies managed products using the managed product's entity display name.
Endpoint	Displays the IP address or host name of a computer with a client (for example OfficeScan client) installed.
Incident Source (User)	Displays the logged on user name.
Incident Source (Sender)	Displays the source email address.
Recipient	Displays the destination email address.
Subject	Displays the subject of the email message.
File Location	Displays the location and the name of the file.
File	Displays the name of the file from which the incident was triggered.
Policy	Displays the name of the policy triggered by the incident.
Template	Displays the name of the template in which a template match was triggered.
Channel	Displays the entity through which a digital asset was transmitted.
Channel Group	Displays the channel type.
Action	Displays the action taken on the incident.
Incidents	Displays the number of incidents.

DLP Template Match Information

TABLE B-74. DLP Template Match Information

DATA	DESCRIPTION
ID	Displays the unique ID for the log.

DATA	DESCRIPTION
Received	Displays the time when the managed product received the incident information.
Generated	Displays the time when the incident was triggered.
Product Entity/ Endpoint	This data column displays one of the following: - The entity display name for a managed product. Control Manager identifies managed products using the managed product's entity display name. - The IP address or host name of a computer with a client (for example OfficeScan client) installed.
Product	Displays the name of the managed product. Example: OfficeScan, ScanMail for Microsoft Exchange
Product/Endpoint IP	This data column displays one of the following: - The IP address of the server on which the managed product installs. - The IP address of a computer with a client (for example OfficeScan client) installed.
Product/Endpoint MAC	This data column displays one of the following: - The MAC address of the server on which the managed product installs. - The MAC address of a computer with a client (for example OfficeScan client) installed.
Managing Server	Displays the entity display name for a managed product to which an endpoint is registered. Control Manager identifies managed products using the managed product's entity display name.
Endpoint	Displays the IP address or host name of a computer with a client (for example OfficeScan client) installed.
Incident Source (User)	Displays the logged on user name.
Recipient	Displays the destination email address.

DATA	DESCRIPTION
Subject	Displays the subject of the email message.
File Location	Displays the location and the name of the file.
File	Displays the name of the file from which the incident was triggered.
Policy	Displays the name of the policy triggered by the incident.
Template	Displays the name of the template in which a template match was triggered.
Channel	Displays the entity through which a digital asset was transmitted.
Channel Group	Displays the channel type.

Data Discovery Information

Displays information about data discovery information.

Data Discovery Data Loss Prevention Detection Information

TABLE B-75. Data Discovery Data Loss Prevention Detection Information

DATA	DESCRIPTION
Received	Displays the time when Control Manager received the log.
Generated	Displays the time when the log data was generated in the managed product.
Rule	Displays the name of the rule triggered by the incident.
Endpoint	Displays the IP address or host name of a computer where Data Loss Prevention detected the transmission.
Domain	Displays the domain to which the managed product belongs.
User	Displays the name of the user who initiates the activity.

DATA	DESCRIPTION
User Domain	Displays the name of the domain where the user belongs.
File Path	Displays the full path of the location containing the digital asset, or channel (if no source is available).
File	Displays the full file name.
Template	Displays the exact rule name(s) and template(s) triggered by the incident.
Action	Displays the action taken on the transmission.
Details	Displays additional information such as the reason a user has provided for continuing to transfer sensitive data.

Data Discovery Endpoint Information

TABLE B-76. Data Discovery Endpoint Information

DATA	DESCRIPTION
Generated	Displays the time when the log data was generated in the managed product.
Endpoint	Displays the IP address or host name of a computer where Data Loss Prevention detected the transmission.
Device Class	Displays the name of the device category as shown in Windows Device Manager.
Device Display Name	Displays the display name of the device, as shown in Windows Device Manager.
Provider	Displays the name of the company that provides the device.

Appendix C

IPv6 Support in Control Manager

This appendix is required reading for users who plan to deploy Control Manager in an environment that supports IPv6 addressing. This appendix contains information on the extent of IPv6 support in Control Manager.

Trend Micro assumes that the reader is familiar with IPv6 concepts and the tasks involved in setting up a network that supports IPv6 addressing.

IPv6 support for Control Manager started in this version 6.0 Service Pack 1. Earlier Control Manager versions do not support IPv6 addressing. IPv6 support is automatically enabled after installing or upgrading the Control Manager server that satisfies the IPv6 requirements.

Control Manager Server Requirements

The IPv6 requirements for the Control Manager server are as follows:

- The server must be installed on Windows Server 2008. It cannot be installed on Windows Server 2003 because this operating system only supports IPv6 addressing partially.
- Install the IPv4 and IPv6 stacks, and enable the IPv6 stack.

IPv6 Server Limitations

The following table lists the limitations for IPv6 support:

TABLE C-1. IPv6 Support Limitations

ITEM	LIMITATION
Dual IP stacks	Control Manager only supports dual IP stacks. IPv6 support may not work properly if the IPv4 stack is removed.
IPv4 loopback interface	The IPv4 loopback interface is required. To verify that the TCP/IP software is working properly, ping 127.0.0.1.
Windows Server 2008	Windows Server 2008 is required for IPv6 support.
MCP agent	IPv6 support only works for MCP agents. It does not work for Control Manager 2.x agents.
IPv6 address format	The % character is not supported for IPv6 addresses.
Control Manager report	IPv6 addresses may not display correctly in pre-defined reports.

Configuring IPv6 Addresses

The web console allows you to configure an IPv6 address. The following are some configuration guidelines.

- Control Manager accepts standard IPv6 address presentations.

For example:

```
2001:0db7:85a3:0000:0000:8a2e:0370:7334
```

```
2001:db7:85a3:0:0:8a2e:370:7334
```

```
2001:db7:85a3::8a2e:370:7334
```

```
::ffff:192.0.2.128
```

- Control Manager also accepts link-local IPv6 addresses, such as:

```
fe80::210:5aff:feaa:20a2
```



WARNING!

Exercise caution when specifying a link-local IPv6 address because even though Control Manager can accept the address, it might not work as expected under certain circumstances. For example, Control Manager cannot update from an update source if the source is on another network segment and is identified by its link-local IPv6 address.

- When the IPv6 address is part of a URL, enclose the address in square brackets ([]).

Screens That Display IP Addresses

IP addresses are shown on the following screens:

- **Product Directory**
- **Ad Hoc Query Results**
- **Managed Servers**

Appendix D

Checking Policy Status

Policy status allows administrators to check if Control Manager has successfully deployed a policy to its targets.

To check the policy deployment status, use one of the following methods:

- On the **Policy Management** screen, click a number in the policy list. The **Ad Hoc Query Results** screen appears.
- On the dashboard, click a number in the **Policy Status** widget. The **Ad Hoc Query Results** screen appears.
- Perform an Ad Hoc Query

Policy Status

The following table provides the descriptions and suggestions about each policy status:

TABLE D-1. Policy Status

POLICY STATUS	DESCRIPTION	SUGGESTIONS
Pending	Control Manager is processing the policy.	Wait a few minutes and then check the status again.
Without policy	Control Manager has not assigned a policy to this endpoint or managed product.	Assign a policy to the endpoint or managed product.
Deployed	Control Manager has successfully deployed the policy.	N/A
Endpoint unable to connect to server	• The endpoint did not receive the policy settings. • The server is currently busy.	• Check the connection status of the endpoint • Connect the endpoint to the company network • Wait for the updated policy status

POLICY STATUS	DESCRIPTION	SUGGESTIONS
Inapplicable product settings	The managed product cannot process some of the policy settings.	• Verify the policy settings • Update to the latest policy template version • Check the settings on the managed product • Verify the IP address of the managed product on the Managed Servers screen If the IP address is incorrect, unregister and then register the managed product again to Control Manager. • Refer to the <i>Administrator's Guide</i> for the managed product
Unsupported endpoint	The endpoint does not support some features specified in the policy settings.	Upgrade the client to a supported version.
Settings changed locally	Some settings on the endpoint or managed product do not comply with the settings specified in the policy because the managed product administrator has made some changes through the managed product console.	Verify the settings on the managed product console.
Unactivated product services	The managed product has not activated some of the services specified in the policy settings.	Activate the related services on the managed product.
Disabled product services	The managed product has disabled some of the services specified in the policy settings.	Enable the related services on the managed product.
Partially deployed	Control Manager has enforced a portion of the policy settings.	Wait a few minutes and then check the status again.

POLICY STATUS	DESCRIPTION	SUGGESTIONS
Managed by [Control Manager server name]	Another Control Manager is currently managing the managed product.	Remove the managed product from the Managed Server list and add the managed product to the list again.
Invalid user name or password	The user name or password for authentication is incorrect.	Verify the user name or password.
Invalid product server or authentication information	The server name or the authentication information is incorrect.	Verify the server name and the authentication information.
Unable to automatically log on to product	Control Manager cannot use the single sign-on function to access the managed product.	• Check the single sign-on function in the Product Directory • Check the connection status of the MCP agent • Change the server connection type from Automatic to Manual in the Managed Servers list.
Web server configuration error	A web service error has occurred.	Check the IIS configuration.
Product communication error	Unable to access the product console.	• Check if you can connect to the managed product's web console. • Check the settings of the managed product.
Unable to connect to product	Control Manager cannot establish a connection with the managed product.	• Check the connection status of the managed product. • Check the network connection

POLICY STATUS	DESCRIPTION	SUGGESTIONS
Unsupported product version	The managed product version is not supported.	Upgrade the managed product to a supported version.
Network configuration error	A network connection error has occurred.	Check the network connection.
System error. Error ID: [error ID number].	A system error has occurred.	Contact your Trend Micro support representative.

Appendix E

Templates for Policy Management

This section provides information on configuring the product settings used in policy management.

Deep Discovery Inspector Product Settings

This section contains information on configuring Deep Discovery Inspector settings in policy management.

Deny List/Allow List

The Deny List/Allow List screen is separated in to the following tabs: Deny List, Allow List, Import/Export.

TABLE E-1. Deny List/Allow List Tabs

TAB	DESCRIPTION
Deny List	Control Manager monitors or monitors and resets the connection to entries in the Deny List.
Allow List	Control Manager allows the connection to entries in the Allow List.  Tip Use the Allow List to lower the number of false positive detections from the Deny List.
Import/Export	Import or export Deny List or Allow List entries.

Creating a Custom Deny List

Procedure

1. Go to **Custom Detections > Deny List/Allow List**.
2. Select the **Deny List** tab.
3. To add an entity to the Deny List, check the corresponding item and select **Add**.
The **Add Item to Deny List** window appears.
4. To add an entity to the Deny List, select **Add**.

The **Add Item to Deny List** window appears.

5. At the **Add Item to Deny List** window, verify information, add any comments, and click **Save**.
6. Click the **Reload** button to apply updates.

The entity is added to the Deny List.

**Note**

For optimum performance, when updating both the Deny and Allow Lists, use the **Reload** button when all updates have been specified.

Creating a Custom Allow List

Procedure

1. Go to **Custom Detections > Deny List/Allow List**.
2. Select the **Allow List** tab.
3. To add an entity to the Allow List, check the corresponding item and select **Add**.

The **Add Item to Allow List** window appears.

4. To add an entity to the Allow List, select **Add**.

The **Add Item to Allow List** window appears.

5. At the **Add Item to Allow List** window, verify information, add any comments, and click **Save**.
6. Click the **Reload** button to apply updates.

The entity is added to the Allow List.

**Note**

For optimum performance, when updating both the Deny and Allow Lists, use the **Reload** button when all updates have been specified.

Importing/Exporting Custom Deny or Allow Lists

Procedure

1. Go to **Custom Detections > Deny List/Allow List**.
2. Select the **Import/Export** tab.
3. To export the current Deny or Allow List, select a list and click **Export**.
4. To overwrite the current Deny or Allow List, select a list, browse to the storage location and click **Import**.

The current selected list is overwritten.

Adding Monitored Network Groups

Establish groups of monitored networks using IP addresses to allow Deep Discovery Inspector to determine whether attacks originate from within or outside the network.

Procedure

1. Click **Add**.

The **Add Monitored Network Groups** screen appears.

2. Specify a group name.
-

**Tip**

Provide specific groups with descriptive names for easy identification of the network to which the IP address belongs. For example, "Finance network", "IT network", or "Administration".

3. Specify an IP address range in the text box (up to 1,000 IP address ranges).

Deep Discovery Inspector comes with a monitored network called **Default**, which contains the following IP address blocks reserved by the Internet Assigned Numbers Authority (IANA) for private networks:

- 10.0.0.0 - 10.255.255.255
 - 172.16.0.0 - 172.31.255.255
 - 192.168.0.0 - 192.168.255.255
- a. If you did not remove **Default**, you do not need to specify these IP address blocks when adding a new monitored network.
 - b. Use a dash to specify an IP address range.

Example: 192.168.1.0-192.168.1.255.

- c. Use a slash to specify the subnet mask for IP addresses.

Example: 192.168.1.0/255.255.255.0 or 192.168.1.0/24.

**Note**

Up to three layers of sub-groups can be added.

4. Select the network zone of network group:
 - **Trusted:** This is a secure network
 - **Untrusted:** There is a degree of doubt about the security of the network.
 5. Click **Add**.
 6. Click **Finish**.
-

Adding Registered Services

Add different servers for specific services that your organization uses internally or considers trustworthy to establish the network profile. Identifying trusted services in the network ensures detection of unauthorized applications and services.

Add only trusted services (up to 1,000 services) to ensure the accuracy of your network profile.

Procedure

1. Select a service from the drop-down list.

TABLE E-2. Service Types

SERVICE	DESCRIPTION
DNS	The network server used as a DNS server.
FTP	The network server used as an FTP server.
HTTP Proxy	The network server used as an HTTP Proxy server.
SMTP	The network server used as an SMTP server.
SMTP Open Relay	The network server used as an SMTP Open Relay server.
Software Update Server	The network server responsible for Windows Server Update Services (WSUS) or the server that performs remote deployment.
Security Audit Server	The network server used to detect both vulnerabilities and insecure configurations.
Active Directory	The network server used as the Active Directory server.
Domain Controller	The network server used as the Domain Controller server.
Database Server	The network server used as the database server.

SERVICE	DESCRIPTION
Authentication Servers - Kerberos	The network server used to provide Kerberos authentication.
File Server	The network server used to provide a location for shared file access.
Web Server	The network server used as a web server.
Content Management Server	The network server used for managing content.
Radius Server	The network server used as the Radius authentication server.

Registered service names appear in the **Defined Registered Services** section.

2. Specify a server name.
3. Specify an IP address.
4. Click **Add**.

Configuring Virtual Analyzer Settings

Use this option to enable or disable analysis of threat files.

Procedure

1. Ensure that the management port can access the Internet; the virtual analyzer may need to query data through this port.
2. At the **Virtual Analyzer Configuration** window, check **Submit files to Virtual Analyzer**.
3. Select an analysis module.
 - For **Internal Analyzer** select a network type.

TABLE E-3. Analyzer Network Types

MODULE OPTION	DESCRIPTION
Management Network	Select this network type to direct virtual analyzer traffic through a management port.
Specified Network	Select this network type to configure a specific port for virtual analyzer traffic. Ensure that the port is able to connect to an outside network directly.
Isolated Network	Select this network type to isolate virtual analyzer traffic within the virtual analyzer, and when the environment has no connection to an outside network.

TABLE E-4. Specified Network Options

OPTION	ACTION
Virtual Analyzer port	Select a Virtual Analyzer port.  Note Assign a Virtual Analyzer port different from the Deep Discovery Inspector data port.
Configure IPv4	Automatically (using DHCP) is selected. This setting cannot be changed.

- For **External Analyzer** specify a Virtual Analyzer IP address and an API Key.

**Tip**

The external analyzer (Deep Discovery Advisor) has more analysis capability than the internal analyzer (Virtual Analyzer).

4. Configure **File Type** options:

- **Highly suspicious files** is selected. This setting cannot be changed.
- Specify the maximum file size. Changing this setting may affect Deep Discovery Inspector performance.

5. Enable GRID analysis.

GRID (Goodware Resource and Information Database) is a Trend Micro list of known good files, codes, and URLs. The list is used to differentiate files that are safe from those that are not. Enabling this option allows selected files to be scanned and classified prior to being submitted to the Virtual Analyzer.

IMSVa Product Settings

This section contains information on configuring IMSVA settings for policy management.

IMSVa Rules

IMSVa evaluates *data in an email message* against a set of defined rules. Rules determine data that must be protected from unauthorized transmission and the action that IMSVA performs when it detects transmission.

IMSVa rules have the following components:

- **Mail Route:** A set of sender and recipient email addresses or groups, or an LDAP user or group to which the policy is applied. You can use the asterisk (*) to create wildcard expressions and simplify route configuration.
- **Filter:** A rule or set of rules that apply to a specific route. In TCM, you can set rules for protecting against data loss using templates.
- **Action:** The action that IMSVA performs if the filter conditions are met.

Adding IMSVA Rules

Creating a rule involves the following steps:

- Step 1: Set Rule Name
- Step 2: Select Recipients and Senders
- Step 3: Select Templates
- Step 4: Select Actions

Procedure

1. Under Settings, click **Add**.

The **Add Rule** screen appears.

Step 1: Set Rule Name

Procedure

1. Type a name for the rule. The name must not exceed 122 bytes in length.
2. Assign an order number that represents its position within the hierarchy of rules.
3. Click **Next**.

The **Select Recipients and Senders** screen appears.

Step 2: Select Recipients and Senders

Set the sender and recipient email addresses or groups, or an LDAP user or group to which the rule is applied. You can also configure exceptions to a mail route.

Procedure

1. Click the link next to To: or From:.

The **Set Recipients** or **Set Senders** screen appears.

2. Select one of the following:
 - **Anyone:** Select this option to remove any restriction on the recipients or senders.
 - **Any of the selected addresses**
3. If you selected **Any of selected addresses**, choose one of the following from the list box:
 - **Enter email address:** Type the email address to add.
 - **Search for LDAP users or groups:** Type the LDAP user or group name and click **Search**. The results display in the list box.
 - **Select address groups:** All existing address groups appear in the list.

When selecting an LDAP group as the recipients or senders, you can use wildcards at the beginning and/or at the end of the LDAP group if you have specified Microsoft Active Directory or Sun iPlanet Directory as the LDAP server. For more information, see *Using the Asterisk Wildcard*.

4. If you are adding an email address, click **Add >**. If you are adding an LDAP user or group, or an address group, click it in the list box, and then click **Add >**.
5. Click **Save**.
6. Click **Next**.

The **Step 3: Select Template** screen appears.

Configuring Exceptions

You can configure a route that applies to a large group of senders or recipients, with the exception of specific users, to whom the rule does not apply.

Procedure

1. Click the link next to Exceptions.

The **Set Exceptions** screen appears.

2. Under Select addresses, select one of the following for both the From and To addresses:
 - Enter email address: Type the email address to add.
 - Search for LDAP users or groups: Type the LDAP user or group name and click Search. The results display in the list box.
 - Select address groups: All existing address groups appear in the list.
 3. If you are adding an email address, click **Add >**. If you are adding an LDAP or address group, click it in the list box, and then click **Add >**.
 4. Click **Save**.
-

Using the Asterisk Wildcard

You can use the asterisk (*) as a wildcard in email addresses when defining routes.

Wildcards can appear in the name or domain sections of an email address. The following are valid examples:

- *@*: Valid representation of all email addresses.
- *@domain.tld, name@*.tld: Valid representation of the whole name or the domain (not the top level domain (TLD)).
- *@*.tld: Valid representation of both the name and the domain (not the TLD).

Wildcards cannot appear in a subdomain or the top-level domain. Wildcards also cannot appear with other letters; they must appear alone. The following are invalid examples:

- name@domain.*.tld: Invalid representation of a subdomain.
- name@domain.*: Invalid representation of a TLD.
- *name@domain.tld: Invalid use in conjunction with a name.

Step 3: Select Templates

Templates prevent your digital assets (for example, social security numbers and credit card numbers) from leaving your company network. They also provide compliance for government regulations regarding privacy.

Procedure

1. Select templates from the Available templates list, and then click >>.

Select multiple templates by pressing and holding the CTRL key and then selecting the templates.

2. Click **Next**.

The **Step 4: Select Actions** screen appears.

Step 4: Select Actions

IMSVa performs one or more actions when it detects an attempt to transmit digital assets.

Procedure

1. Select one of the following actions:
 - **Quarantine to:** Instructs IMSVa to intercept the messages and prevent them from reaching the recipients.
 - **Send notifications:** Instructs IMSVa to send an email notification to one or more recipients.
 2. If you selected **Send notifications**, select the type of notification message that you want to use from the dropdown list. The notification messages that are available for use will depend on the targets that you selected.
 3. Click **Finish**.
-

Modifying Existing IMSVA Rules

Procedure

1. Click the name of the rule to edit.
The **Summary** screen for the rule appears.
2. In the **Rule** tab, Click **Edit** for If recipients and senders are.
3. Configure the route settings. For more information, see **Step 2: Select Recipients and Senders**.
4. Click **Edit** for And scanning conditions match.
5. Configure the template settings.
6. Click **Edit** for Then action is.
7. Configure the action settings.



Note

If TMCM is unable to connect to the selected targets, some action options may become unavailable.

8. Click **Save**.
-

Deleting IMSVA Rules

Procedure

1. Select the check box next to the rule to be deleted.
 2. Click **Delete**.
-

OfficeScan Client Settings

This section contains information on configuring the OfficeScan client settings for policy management.

Enabling or Disabling the Agent Services from the Web Console

Procedure

1. For OfficeScan agents running Windows XP, Vista, 7, 8, or 8.1:
 - a. Select or clear the check box under the following sections:
 - **Unauthorized Change Prevention Service**
 - **Firewall Service**
 - **Suspicious Connection Service**
 - **Data Protection Service**
 - **Advanced Protection Service**
-

Configuring Malware Behavior Blocking, Event Monitoring, and the Exception List

Procedure

1. Select **Enable Malware Behavior Blocking for known and potential threats** and select one of the following:
 - **Known threats:** Blocks behaviors associated with known malware threats
 - **Known and potential threats:** Blocks behavior associated with known threats and takes action on behavior that is potentially malicious
2. Configure Event Monitoring settings.

- a. Select **Enable Event Monitoring**.
 - b. Choose the system events to monitor and select an action for each of the selected events. For information about monitored system events and actions, see [Event Monitoring on page E-16](#).
3. Configure the exception lists.
- a. Under **Type the full program path**, type the full path of the program to approve or block. Separate multiple entries with semicolons (;).
 - b. Click **Add to Approved List** or **Add to Blocked List**.
 - c. To remove a blocked or approved program from the list, click the trash bin icon (🗑️) next to the program.

**Note**

Control Manager accepts a maximum of 100 approved programs and 100 blocked programs.

Event Monitoring

Event Monitoring provides a more generic approach to protecting against unauthorized software and malware attacks. It monitors system areas for certain events, allowing administrators to regulate programs that trigger such events. Use Event Monitoring if you have specific system protection requirements that are above and beyond what is provided by Malware Behavior Blocking.

The following table provides a list of monitored system events.

TABLE E-5. Monitored System Events

EVENTS	DESCRIPTION
Duplicated System File	Many malicious programs create copies of themselves or other malicious programs using file names used by Windows system files. This is typically done to override or replace system files, avoid detection, or discourage users from deleting the malicious files.

EVENTS	DESCRIPTION
Hosts File Modification	The Hosts file matches domain names with IP addresses. Many malicious programs modify the Hosts file so that the web browser is redirected to infected, non-existent, or fake websites.
Suspicious Behavior	Suspicious behavior can be a specific action or a series of actions that is rarely carried out by legitimate programs. Programs exhibiting suspicious behavior should be used with caution.
New Internet Explorer Plugin	Spyware/grayware programs often install unwanted Internet Explorer plugins, including toolbars and Browser Helper Objects.
Internet Explorer Setting Modification	Many virus/malware change Internet Explorer settings, including the home page, trusted websites, proxy server settings, and menu extensions.
Security Policy Modification	Modifications in Windows Security Policy can allow unwanted applications to run and change system settings.
Program Library Injection	Many malicious programs configure Windows so that all applications automatically load a program library (DLL). This allows the malicious routines in the DLL to run every time an application starts.
Shell Modification	Many malicious programs modify Windows shell settings to associate themselves to certain file types. This routine allows malicious programs to launch automatically if users open the associated files in Windows Explorer. Changes to Windows shell settings can also allow malicious programs to track the programs used and start alongside legitimate applications.
New Service	Windows services are processes that have special functions and typically run continuously in the background with full administrative access. Malicious programs sometimes install themselves as services to stay hidden.
System File Modification	Certain Windows system files determine system behavior, including startup programs and screen saver settings. Many malicious programs modify system files to launch automatically at startup and control system behavior.

EVENTS	DESCRIPTION
Firewall Policy Modification	The Windows Firewall policy determines the applications that have access to the network, the ports that are open for communication, and the IP addresses that can communicate with the computer. Many malicious programs modify the policy to allow themselves to access to the network and the Internet.
System Process Modification	Many malicious programs perform various actions on built-in Windows processes. These actions can include terminating or modifying running processes.
New Startup Program	Malicious applications usually add or modify autostart entries in the Windows registry to automatically launch every time the computer starts.

When Event Monitoring detects a monitored system event, it performs the action configured for the event.

The following table lists possible actions that administrators can take on monitored system events.

TABLE E-6. Actions on Monitored System Events

ACTION	DESCRIPTION
Assess	Control Manager always allows programs associated with an event but records this action in the logs for assessment. This is the default action for all monitored system events.  Note This option is not supported for Program Library Injections on 64-bit systems.
Allow	Control Manager always allows programs associated with an event.

ACTION	DESCRIPTION
Ask when necessary	Control Manager prompts users to allow or deny programs associated with an event and add the programs to the exception list If the user does not respond within a certain time period, Control Manager automatically allows the program to run. The default time period is 30 seconds.  Note This option is not supported for Program Library Injections on 64-bit systems.
Deny	Control Manager always blocks programs associated with an event and records this action in the logs. When a program is blocked and notifications are enabled, Control Manager displays a notification on the Control Manager computer.

Managing Access to External Devices

Procedure

1. Choose to allow or block the AutoRun function (`autorun.inf`) on USB storage devices.
2. Select a permission for each storage device. For details about permissions, see [Permissions for Storage Devices on page E-19](#).
3. Configure advanced permissions and notifications if the permission for a storage device is any of the following: **Modify**, **Read and execute**, **Read**, or **List device content only**.
4. For each non-storage device, select **Allow** or **Block**.

Permissions for Storage Devices

Device Control permissions for storage devices are used when you:

- Allow access to USB storage devices, CD/DVD, floppy disks, and network drives. You can grant full access to these devices or limit the level of access.
- Configure the list of approved USB storage devices. Device Control allows you to block access to all USB storage devices, except those that have been added to the list of approved devices. You can grant full access to the approved devices or limit the level of access.

The following table lists the permissions for storage devices.

TABLE E-7. Device Control Permissions for Storage Devices

PERMISSIONS	FILES ON THE DEVICE	INCOMING FILES
Full access	Permitted operations: Copy, Move, Open, Save, Delete, Execute	Permitted operations: Save, Move, Copy This means that a file can be saved, moved, and copied to the device.
Modify	Permitted operations: Copy, Move, Open, Save, Delete Prohibited operations: Execute	Permitted operations: Save, Move, Copy
Read and execute	Permitted operations: Copy, Open, Execute Prohibited operations: Save, Move, Delete	Prohibited operations: Save, Move, Copy
Read	Permitted operations: Copy, Open Prohibited operations: Save, Move, Delete, Execute	Prohibited operations: Save, Move, Copy
List device content only	Prohibited operations: All operations The device and the files it contains are visible to the user (for example, from Windows Explorer).	Prohibited operations: Save, Move, Copy

PERMISSIONS	FILES ON THE DEVICE	INCOMING FILES
Allow (Data Protection)	Permitted operations: Copy, Move, Open, Save, Delete, Execute	Permitted operations: Save, Move, Copy This means that a file can be saved, moved, and copied to the device.
Block (available after installing Data Protection)	Prohibited operations: All operations The device and the files it contains are not visible to the user (for example, from Windows Explorer).	Prohibited operations: Save, Move, Copy

The file-based scanning function in Control Manager complements and may override the device permissions. For example, if the permission allows a file to be opened but Control Manager detects that the file is infected with malware, a specific scan action will be performed on the file to eliminate the malware. If the scan action is Clean, the file opens after it is cleaned. However, if the scan action is Delete, the file is deleted.



Tip

Device Control for Data Protection supports all 64-bit platforms. For Unauthorized Change Prevention monitoring on systems that Control Manager does not support, set the device permission to **Block** to limit access to these devices.

Configuring Advanced Permissions

Although you can configure advanced permissions and notifications for a specific storage device on the user interface, the permissions and notifications are actually applied to all storage devices. This means that when you click **Advanced permissions and notifications** for CD/DVD, you are actually defining permissions and notifications for all storage devices.



Note

For details about advanced permissions and how to correctly define programs with advanced permissions, see [Advanced Permissions for Storage Devices on page E-22](#).

Procedure

1. Click **Advanced permissions and notifications**.

A new screen opens.

2. Below **Programs with read and write access to storage devices**, type a program path and file name and then click **Add**.

Digital Signature Provider is not accepted.

3. Below **Programs on storage devices that are allowed to execute**, type the program path and name or the Digital Signature Provider and then click **Add**.

4. Select .

5. Click .
-

Advanced Permissions for Storage Devices

Advanced permissions apply when you grant limited permissions to most storage devices. The permission can be any of the following:

- Modify
- Read and execute
- Read
- List device content only

You can keep the permissions limited but grant advanced permissions to certain programs on the storage devices and on the local endpoint.

To define programs, configure the following program lists.

TABLE E-8. Program Lists

PROGRAM LIST	DESCRIPTION	VALID INPUTS
Programs with read and write access to devices	This list contains local programs and programs on storage devices that have read and write access to the devices. An example of a local program is Microsoft Word (<code>winword.exe</code>), which is usually found in <code>C:\Program Files\Microsoft Office\Office</code>. If the permission for USB storage devices is "List device content only" but "<code>C:\Program Files\Microsoft Office\Office\winword.exe</code>" is included in this list: • A user will have read and write access to any file on the USB storage device that is accessed from Microsoft Word. • A user can save, move, or copy a Microsoft Word file to the USB storage device.	Program path and name For details, see Specifying a Program Path and Name on page E-24.
Programs on devices that are allowed to execute	This list contains programs on storage devices that users or the system can execute. For example, if you want to allow users to install software from a CD, add the installation program path and name, such as "<code>E:\Installer\Setup.exe</code>", to this list.	Program path and name or Digital Signature Provider For details, see Specifying a Program Path and Name on page E-24 or Specifying a Digital Signature Provider on page E-24.

There are instances when you need to add a program to both lists. Consider the data lock feature in a USB storage device, which, if enabled, prompts users for a valid user name and password before the device can be unlocked. The data lock feature uses a program on the device called "`Password.exe`", which must be allowed to execute so that users can unlock the device successfully. "`Password.exe`" must also have read and write access to the device so that users can change the user name or password.

Specifying a Digital Signature Provider

Specify a Digital Signature Provider if you trust programs issued by the provider. For example, type Microsoft Corporation or Trend Micro, Inc. You can obtain the Digital Signature Provider by checking the properties of a program (for example, by right-clicking the program and selecting **Properties**).

Specifying a Program Path and Name

A program path and name should have a maximum of 259 characters and must only contain alphanumeric characters (A-Z, a-z, 0-9). It is not possible to specify only the program name.

You can use wildcards in place of drive letters and program names. Use a question mark (?) to represent single-character data, such as a drive letter. Use an asterisk (*) to represent multi-character data, such as a program name.



Note

Wildcards cannot be used to represent folder names. The exact name of a folder must be specified.

Configuring an Approved List of USB Devices

The approved list for USB devices supports the use of the asterisk (*) wildcard. Replace any field with the asterisk (*) to include all devices that satisfy the other fields. For example, [vendor]-[model]-* places all USB devices from the specified vendor and the specified model type, regardless of serial ID, to the approved list.

Procedure

1. Click **Approved devices**.
2. Type the device vendor.
3. Type the device model and serial ID.
4. Select the permission for the device.

For details about permissions, see [Permissions for Storage Devices on page E-19](#).

5. To add more devices, click the plus (+) icon.
 6. Click .
-

Device List Tool

Run the Device List Tool locally on each endpoint to query external devices connected to the endpoint. The tool scans an endpoint for external devices and then displays device information in a browser window. You can then use the information when configuring device settings for Data Loss Prevention and Device Control.

Running the Device List Tool

Procedure

1. On the Control Manager server computer, go to `\PCCSRV\Admin\Utility\ListDeviceInfo`.
 2. Copy `listDeviceInfo.exe` to the target endpoint.
 3. On the endpoint, run the `listDeviceInfo.exe`.
 4. View device information in the browser window that displays. Data Loss Prevention and Device Control use the following information:
 - Vendor (required)
 - Model (optional)
 - Serial ID (optional)
-

Configuring a Manual Scan

Procedure

1. On the **Target** tab, configure the following:
 - *Files to Scan on page E-26*

- [Scan Settings on page E-27](#)
- [CPU Usage on page E-29](#)
- [Scan Exclusions on page E-29](#)

2. Click the **Action** tab and then configure the following:

TABLE E-9. Manual Scan Actions

ACTION	REFERENCE
Virus/Malware action	Primary action (select one): • Use ActiveAction on page E-35 • Use the Same Action for all Virus/Malware Types on page E-36 • Use a Specific Action for Each Virus/Malware Type on page E-36  Note For details about the different actions, see Virus/Malware Scan Actions on page E-34. Additional virus/malware actions: • Quarantine Directory on page E-37 • Back Up Files Before Cleaning on page E-37 • Damage Cleanup Services on page E-38
Spyware/Grayware action	Primary action: • Spyware/Grayware Scan Actions on page E-40

Files to Scan

Select from the following options:

- **All scannable files:** Scan all files

- **File types scanned by IntelliScan:** Only scan files known to potentially harbor malicious code, including files disguised by a harmless extension name.
- **Files with the following extensions:** Only scan files whose extensions are included in the file extension list. Add new extensions or remove any of the existing extensions.

Scan Settings

Select one or more of the following options:

- **Scan floppy disk during system shutdown:** Real-time Scan scans any floppy disk for boot viruses before shutting down the endpoint. This prevents any virus/malware from executing when a user reboots the endpoint from the disk.
- **Scan hidden folders:** Allows Control Manager to detect and then scan hidden folders on the endpoint during Manual Scan
- **Scan network drive:** Scans network drives or folders mapped to the OfficeScan agent endpoint during Manual Scan or Real-time Scan.
- **Scan the boot sector of the USB storage device after plugging in:** Automatically scans only the boot sector of a USB storage device every time the user plugs it in (Real-time Scan).
- **Scan all files in removable storage devices after plugging in:** Automatically scans all files on a USB storage device every time the user plugs it in (Real-time Scan).
- **Quarantine malware variants detected in memory:** Behavior Monitoring scans the system memory for suspicious processes and Real-Time Scan maps the process and scans it for malware threats. If a malware threat exists, Real-Time scan quarantines the process and/or file.



Note

This feature requires that administrators enable the Unauthorized Change Prevention Service and the Advanced Protection Service.

- **Scan compressed files:** Allows Control Manager to scan up to a specified number of compression layers and skip scanning any excess layers. Control Manager also

cleans or deletes infected files within compressed files. For example, if the maximum is two layers and a compressed file to be scanned has six layers, Control Manager scans two layers and skips the remaining four. If a compressed file contains security threats, Control Manager cleans or deletes the file.

**Note**

Control Manager treats Microsoft Office 2007 files in Office Open XML format as compressed files. Office Open XML, the file format for Office 2007 applications, uses ZIP compression technologies. If you want files created using these applications to be scanned for viruses/malware, you need to enable scanning of compressed files.

- **Scan OLE objects:** When a file contains multiple Object Linking and Embedding (OLE) layers, Control Manager scans the specified number of layers and ignores the remaining layers.

All OfficeScan agents managed by the server check this setting during Manual Scan, Real-time Scan, Scheduled Scan, and Scan Now. Each layer is scanned for virus/malware and spyware/grayware.

For example:

The number of layers you specify is 2. Embedded within a file is a Microsoft Word document (first layer), within the Word document is a Microsoft Excel spreadsheet (second layer), and within the spreadsheet is an .exe file (third layer). Control Manager will scan the Word document and Excel spreadsheet, and skip the .exe file.

- **Detect exploit code in OLE files:** OLE Exploit Detection heuristically identifies malware by checking Microsoft Office files for exploit code.

**Note**

The specified number of layers is applicable to both **Scan OLE objects** and **Detect exploit code** options.

- **Enable IntelliTrap:** Detects and removes virus/malware on compressed executable files. This option is available only for Real-time Scan.

- **Scan boot area:** Scans the boot sector of the agent endpoint's hard disk for virus/malware during Manual Scan, Scheduled Scan and Scan Now

CPU Usage

Control Manager can pause after scanning one file and before scanning the next file. This setting is used during Manual Scan, Scheduled Scan, and Scan Now.

Select from the following options:

- **High:** No pausing between scans
- **Medium:** Pause between file scans if CPU consumption is higher than 50%, and do not pause if 50% or lower
- **Low:** Pause between file scans if CPU consumption is higher than 20%, and do not pause if 20% or lower

If you choose Medium or Low, when scanning is launched and CPU consumption is within the threshold (50% or 20%), Control Manager will not pause between scans, resulting in faster scanning time. Control Manager uses more CPU resource in the process but because CPU consumption is optimal, endpoint performance is not drastically affected. When CPU consumption begins to exceed the threshold, Control Manager pauses to reduce CPU usage, and stops pausing when consumption is within the threshold again.

If you choose High, Control Manager does not check the actual CPU consumption and scans files without pausing.

Scan Exclusions

Configure scan exclusions to increase the scanning performance and skip scanning files causing false alarms. When a particular scan type runs, Control Manager checks the scan exclusion list to determine which files on the endpoint will be excluded from both virus/malware and spyware/grayware scanning.

When you enable scan exclusion, Control Manager will not scan a file under the following conditions:

- The file is found under a specific directory (or any of its sub-directories).

- The file name matches any of the names in the exclusion list.
- The file extension matches any of the extensions in the exclusion list.



Tip

For a list of products that Trend Micro recommends excluding from Real-Time scans, go to:

<http://esupport.trendmicro.com/solution/en-US/1059770.aspx>

Wildcard Exceptions

Scan exclusion lists for files and directories support the use of wildcard characters. Use the "?" character to replace one character and "*" to replace several characters.

Use wildcard characters cautiously. Using the wrong character might exclude incorrect files or directories. For example, adding C:* to the Scan Exclusion List (Files) would exclude the entire C:\ drive.

TABLE E-10. Scan Exclusions Using Wildcard Characters

VALUE	EXCLUDED	NOT EXCLUDED
<code>c:\director*\fil *.txt</code>	c:\directory\fil\doc.txt c:\directories\fil\files document.txt	c:\directory\file\ c:\directories\files\ c:\directory\file\doc.txt c:\directories\files document.txt
<code>c:\director? \file*.txt</code>	c:\directory\file doc.txt	c:\directories\file document.txt
<code>c:\director? \file\?.txt</code>	c:\directory\file\1.txt	c:\directory\file\doc.txt c:\directories\file document.txt
<code>c:*.txt</code>	All .txt files in the C:\ directory	All other file types in the C:\ directory

VALUE	EXCLUDED	NOT EXCLUDED
[]	Not supported	Not supported
.	Not supported	Not supported

Scan Exclusion List (Directories)

Control Manager will not scan all files found under a specific directory on the computer. You can specify a maximum of 256 directories.



Note

By excluding a directory from scans, Control Manager automatically excludes all of the directory's sub-directories from scans.

You can also choose **Exclude directories where Trend Micro products are installed**. If you select this option, Control Manager automatically excludes the directories of the following Trend Micro products from scanning:

- <Server installation folder>
- ScanMail™ for Microsoft Exchange (all versions except version 7). If you use version 7, add the following folders to the exclusion list:
 - \Smex\Temp
 - \Smex\Storage
 - \Smex\ShareResPool
- ScanMail eManager™ 3.11, 5.1, 5.11, 5.12
- ScanMail for Lotus Notes™ eManager NT
- InterScan Web Security Suite
- InterScan Web Protect
- InterScan FTP VirusWall
- InterScan Web VirusWall

- InterScan E-mail VirusWall
- InterScan VirusWall 3.53
- InterScan NSAPI Plug-in
- InterScan eManager 3.5x

If you have a Trend Micro product NOT included in the list, add the product directories to the scan exclusion list.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.
- **Overwrites**: This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to**: This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from**: This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (Files)

Control Manager will not scan a file if its file name matches any of the names included in this exclusion list. If you want to exclude a file found under a specific location on the endpoint, include the file path, such as C:\Temp\sample.jpg.

You can specify a maximum of 256 files.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.

- **Overwrites:** This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to:** This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from:** This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (File Extensions)

Control Manager will not scan a file if its file extension matches any of the extensions included in this exclusion list. You can specify a maximum of 256 file extensions. A period (.) is not required before the extension.

For Real-time Scan, use an asterisk (*) as a wildcard character when specifying extensions. For example, if you do not want to scan all files with extensions starting with D, such as DOC, DOT, or DAT, type **D***.

For Manual Scan, Scheduled Scan, and Scan Now, use a question mark (?) or asterisk (*) as a wildcard character.

Apply Scan Exclusion Settings to All Scan Types

Control Manager allows you to configure scan exclusion settings for a particular scan type and then apply the same settings to all the other scan types. For example:

On January 1, Control Manager administrator Chris found out that there are a large number of JPG files on agent computers and realized that these files do not pose any security threat. Chris added JPG in the file exclusion list for Manual Scan and then applied this setting to all scan types. Real-time Scan, Scan Now, and Scheduled Scan are now set to skip scanning .jpg files.

A week later, Chris removed JPG from the exclusion list for Real-time Scan but did not apply scan exclusion settings to all scan types. JPG files will now be scanned but only during Real-time Scan.

Virus/Malware Scan Actions

The scan action Control Manager performs depends on the virus/malware type and the scan type that detected the virus/malware. For example, when Control Manager detects a Trojan horse program (virus/malware type) during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Control Manager can perform against viruses/malware:

TABLE E-11. Virus/Malware Scan Actions

ACTION	DESCRIPTION
Delete	Control Manager deletes the infected file.
Quarantine	Control Manager renames and then moves the infected file to a temporary quarantine directory on the agent endpoint located in <Agent installation folder>\Suspect. The OfficeScan agent then sends quarantined files to the designated quarantine directory. The default quarantine directory is on the Control Manager server, under <Server installation file>\PCCSRV\Virus. Control Manager encrypts quarantined files sent to this directory. If you need to restore any of the quarantined files, use the VSEncrypt tool.
Clean	Control Manager cleans the infected file before allowing full access to the file. If the file is uncleanable, Control Manager performs a second action, which can be one of the following actions: Quarantine, Delete, Rename, and Pass. This action can be performed on all types of malware except probable virus/malware.
Rename	Control Manager changes the infected file's extension to ".vir". Users cannot open the renamed file initially, but can do so if they associate the file with a certain application. The virus/malware may execute when opening the renamed infected file.

ACTION	DESCRIPTION
Pass	Control Manager can only use this scan action when it detects any type of virus during Manual Scan, Scheduled Scan, and Scan Now. Control Manager cannot use this scan action during Real-time Scan because performing no action when an attempt to open or execute an infected file is detected will allow virus/malware to execute. All the other scan actions can be used during Real-time Scan.
Deny Access	This scan action can only be performed during Real-time Scan. When Control Manager detects an attempt to open or execute an infected file, it immediately blocks the operation. Users can manually delete the infected file.

Use ActiveAction

Different types of virus/malware require different scan actions. Customizing scan actions requires knowledge about virus/malware and can be a tedious task. Control Manager uses ActiveAction to counter these issues.

ActiveAction is a set of pre-configured scan actions for viruses/malware. If you are not familiar with scan actions or if you are not sure which scan action is suitable for a certain type of virus/malware, Trend Micro recommends using ActiveAction.

Using ActiveAction provides the following benefits:

- ActiveAction uses scan actions that are recommended by Trend Micro. You do not have to spend time configuring the scan actions.
- Virus writers constantly change the way virus/malware attack computers. ActiveAction settings are updated to protect against the latest threats and the latest methods of virus/malware attacks.



Note

ActiveAction is not available for spyware/grayware scan.

The following table illustrates how ActiveAction handles each type of virus/malware:

TABLE E-12. Trend Micro Recommended Scan Actions Against Viruses and Malware

VIRUS/MALWARE TYPE	REAL-TIME SCAN		MANUAL SCAN/SCHEDULED SCAN/ SCAN NOW	
	FIRST ACTION	SECOND ACTION	FIRST ACTION	SECOND ACTION
Joke program	Quarantine	Delete	Quarantine	Delete
Trojan horse program	Quarantine	Delete	Quarantine	Delete
Virus	Clean	Quarantine	Clean	Quarantine
Test virus	Deny Access	N/A	Pass	N/A
Packer	Quarantine	N/A	Quarantine	N/A
Others	Clean	Quarantine	Clean	Quarantine
Probable virus/ malware	Deny Access or user- configured action	N/A	Pass or user- configured action	N/A

For probable virus/malware, the default action is "Deny Access" during Real-time Scan and "Pass" during Manual Scan, Scheduled Scan, and Scan Now. If these are not your preferred actions, you can change them to Quarantine, Delete, or Rename.

Use the Same Action for all Virus/Malware Types

Select this option if you want the same action performed on all types of virus/malware, except probable virus/malware. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

If you choose "Clean" as the first action, Control Manager performs the second action when it detects probable virus/malware.

Use a Specific Action for Each Virus/Malware Type

Manually select a scan action for each virus/malware type.

For all virus/malware types except probable virus/malware, all scan actions are available. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

For probable virus/malware, all scan actions, except "Clean", are available.

Back Up Files Before Cleaning

If Control Manager is set to clean an infected file, it can first back up the file. This allows you to restore the file in case you need it in the future. Control Manager encrypts the backup file to prevent it from being opened, and then stores the file on the <Agent installation folder>\Backup folder.

Quarantine Directory

If the action for an infected file is "Quarantine", the OfficeScan agent encrypts the file and moves it to a temporary quarantine folder located in <Agent installation folder>\SUSPECT and then sends the file to the designated quarantine directory.



Note

You can restore encrypted quarantined files in case you need to access them in the future.

Accept the default quarantine directory, which is located on the Control Manager server computer. The directory is in URL format and contains the server's host name or IP address.

- If the server is managing both IPv4 and IPv6 agents, use the host name so that all agents can send quarantined files to the server.
- If the server only has or is identified by its IPv4 address, only pure IPv4 and dual-stack agents can send quarantined files to the server.
- If the server only has or is identified by its IPv6 address, only pure IPv6 and dual-stack agents can send quarantined files to the server.

You can also specify an alternative quarantine directory by typing the location in URL, UNC path, or absolute file path format. Agents should be able to connect to this alternative directory. For example, the alternative directory should have an IPv6 address

if it will receive quarantined files from dual-stack and pure IPv6 agents. Trend Micro recommends designating a dual-stack alternative directory, identifying the directory by its host name, and using UNC path when typing the directory.

Refer to the following table for guidance on when to use URL, UNC path, or absolute file path:

TABLE E-13. Quarantine Directory

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on the Control Manager server computer	URL	http://<osceserver>	This is the default directory. Configure settings for this directory, such as the size of the quarantine folder.
	UNC path	\\<osceserver>\ofcscan\Virus	
A directory on another Control Manager server computer (if you have other Control Manager servers on the network)	URL	http://<osceserver2>	Ensure that agents can connect to this directory. If you specify an incorrect directory, the OfficeScan agent keeps the quarantined files on the SUSPECT folder until a correct quarantine directory is specified. In the server's virus/malware logs, the scan result is "Unable to send the quarantined file to the designated quarantine folder".
	UNC path	\\<osceserver2>\ofcscan\Virus	
Another endpoint on the network	UNC path	\\<computer_name>\temp	
A different directory on the OfficeScan agent	Absolute path	C:\temp	If you use UNC path, ensure that the quarantine directory folder is shared to the group "Everyone" and that you assign read and write permission to this group.

Damage Cleanup Services

Damage Cleanup Services cleans computers of file-based and network viruses, and virus and worm remnants (Trojans, registry entries, and viral files).

The agent triggers Damage Cleanup Services before or after virus/malware scanning, depending on the scan type.

- When Manual Scan, Scheduled Scan, or Scan Now runs, the OfficeScan agent triggers Damage Cleanup Services first and then proceeds with virus/malware scanning. During virus/malware scanning, the agent may trigger Damage Cleanup Services again if cleanup is required.
- During Real-time Scan, the OfficeScan agent first performs virus/malware scanning and then triggers Damage Cleanup Services if cleanup is required.

You can select the type of cleanup that Damage Cleanup Services runs:

- **Standard cleanup:** The OfficeScan agent performs any of the following actions during standard cleanup:
 - Detects and removes live Trojans
 - Kills processes that Trojans create
 - Repairs system files that Trojans modify
 - Deletes files and applications that Trojans drop
- **Advanced cleanup:** In addition to the standard cleanup actions, the OfficeScan agent stops activities by rogue security software (also known as FakeAV) and certain rootkit variants. The OfficeScan agent also uses advanced cleanup rules to proactively detect and stop applications that exhibit FakeAV and rootkit behavior.

**Note**

While providing proactive protection, advanced cleanup also results in a high number of false-positives.

Damage Cleanup Services does not run cleanup on probable virus/malware unless you select the option **Run cleanup when probable virus/malware is detected**. You can only select this option if the action on probable virus/malware is not **Pass** or **Deny Access**. For example, if the OfficeScan agent detects probable virus/malware during Real-time Scan and the action is quarantine, the OfficeScan agent first quarantines the infected file and then runs cleanup if necessary. The cleanup type (standard or advanced) depends on your selection.

Spyware/Grayware Scan Actions

The scan action Control Manager performs depends on the scan type that detected the spyware/grayware. While specific actions can be configured for each virus/malware type, only one action can be configured for all types of spyware/grayware. For example, when Control Manager detects any type of spyware/grayware during Manual Scan (scan type), it cleans (action) the affected system resources.

The following are the actions Control Manager can perform against spyware/grayware:

TABLE E-14. Spyware/Grayware Scan Actions

ACTION	DESCRIPTION
Clean	Control Manager terminates processes or delete registries, files, cookies, and shortcuts. After cleaning spyware/grayware, OfficeScan agents back up spyware/grayware data, which you can restore if you consider the spyware/grayware safe to access.
Pass	Control Manager performs no action on detected spyware/grayware components but records the spyware/grayware detection in the logs. This action can only be performed during Manual Scan, Scheduled Scan, and Scan Now. During Real-time Scan, the action is "Deny Access". Control Manager will not perform any action if the detected spyware/grayware is included in the approved list.
Deny Access	Control Manager denies access (copy, open) to the detected spyware/grayware components. This action can only be performed during Real-time Scan. During Manual Scan, Scheduled Scan, and Scan Now, the action is "Pass".

Configuring Agent Privileges and Other Settings

Grant users the privileges to modify certain settings and perform high level tasks on the OfficeScan agent.



Note

Antivirus settings only appear after activating the Control Manager Antivirus feature.

**Tip**

To enforce uniform settings and policies throughout the organization, grant limited privileges to users.

Procedure

1. On the **Privileges** tab, configure the following user privileges:

TABLE E-15. Agent Privileges

AGENT PRIVILEGES	REFERENCE
Roaming Privilege	<i>OfficeScan Agent Roaming Privilege on page E-42</i>
Scan Privileges	<i>Scan Type Privileges on page E-43</i>
Scheduled Scan Privileges	<i>Scheduled Scan Privileges and Other Settings on page E-43</i>
Firewall Privileges	<i>Firewall Privileges on page E-45</i>
Behavior Monitoring Privileges	<i>Behavior Monitoring Privileges on page E-46</i>
Mail Scan Privileges	<i>Mail Scan Privileges and Other Settings on page E-46</i>
Proxy Setting Privileges	<i>Proxy Configuration Privileges for Agents on page E-47</i>
Component Update Privileges	<i>Configuring Update Privileges and Other Settings on page E-48</i>
Unloading and Unlocking	<i>Granting the Agent Unloading and Unlocking Privilege on page E-50</i>
Uninstallation	<i>Granting the OfficeScan Agent Uninstallation Privilege on page E-50</i>

2. Click the **Other Settings** tab and configure the following settings:

TABLE E-16. Other Agent Settings

SETTING	REFERENCE
Update Settings	Configuring Update Privileges and Other Settings on page E-48
Web Reputation Settings	Web Threat Notifications for Agent Users on page E-51
Behavior Monitoring Settings	Behavior Monitoring Privileges on page E-46
C&C Contact Alert Settings	C&C Contact Alert Notifications for Agent Users on page E-46
Central Quarantine Restore Alert Settings	Displays a notification message on the endpoint after restoring a quarantined file
OfficeScan Agent Self-protection	OfficeScan Agent Self-protection on page E-51
Scheduled Scan Settings	Granting Scheduled Scan Privileges and Displaying the Privilege Notification on page E-44
Cache Settings for Scans	Cache Settings for Scans on page E-54
OfficeScan Agent Security Settings	OfficeScan Agent Security on page E-56
POP3 Email Scan Settings	Granting Mail Scan Privileges and Enabling POP3 Mail Scan on page E-47
OfficeScan Agent Access Restriction	OfficeScan Agent Console Access Restriction on page E-56
Restart Notification	Security Risk Notifications for OfficeScan Agent Users on page E-57

OfficeScan Agent Roaming Privilege

Grant certain users the OfficeScan agent roaming privilege if agent-server events are interfering with the users' tasks. For example, a user who frequently gives presentations can enable roaming mode before starting a presentation to prevent the Control Manager

server from deploying OfficeScan agent settings and initiating scans on the OfficeScan agent.

When OfficeScan agents are in roaming mode:

- OfficeScan agents do not send logs to the Control Manager server, even if there is a functional connection between the server and agents.
- The Control Manager server does not initiate tasks and deploy OfficeScan agent settings to the agents, even if there is functional connection between the server and agents.
- OfficeScan agents update components if they can connect to any of their update sources. Sources include the Control Manager server, Update Agents, or a custom update source.

The following events trigger an update on roaming agents:

- The user performs a manual update.
- Automatic agent update runs. You can disable automatic agent update on roaming agents.
- Scheduled update runs. Only agents with the required privileges can run scheduled updates. You can revoke this privilege anytime.

Scan Type Privileges

Allow users to configure their own Manual Scan, Real-time Scan and Scheduled Scan settings.

Scheduled Scan Privileges and Other Settings

If Scheduled Scan is set to run on the agent, users can postpone and skip/stop Scheduled Scan.

Granting Scheduled Scan Privileges and Displaying the Privilege Notification

Procedure

1. On the **Privileges** tab, go to the **Scheduled Scan Privileges** section.
2. Select the following options:
 - Postpone Scheduled Scan
 - Skip and stop Scheduled Scan
3. Click the **Other Settings** tab and go to the **Scheduled Scan Settings** section.
4. Select **Display a notification before a scheduled scan occurs**.

When you enable this option, a notification message displays on the agent endpoint minutes before Scheduled Scan runs. Users are notified of the scan schedule (date and time) and their Scheduled Scan privileges, such as postponing, skipping, or stopping Scheduled Scan.

Postpone Scheduled Scan

Users with the "Postpone Scheduled Scan" privilege can perform the following actions:

- Postpone Scheduled Scan before it runs and then specify the postpone duration. Scheduled Scan can only be postponed once.
- If Scheduled Scan is in progress, users can stop scanning and restart it later. Users then specify the amount of time that should elapse before scanning restarts. When scanning restarts, all previously scanned files are scanned again. Scheduled Scan can be stopped and then restarted only once.



Note

The minimum postpone duration/elapsed time users can specify is 15 minutes. The maximum is 12 hours and 45 minutes.

Skip and Stop Scheduled Scan

This privilege allows users to perform the following actions:

- Skip Scheduled Scan before it runs
- Stop Scheduled Scan when it is in progress



Note

Users cannot skip or stop a Scheduled Scan more than one time. Even after a system restart, Scheduled Scan resumes scanning based on the next scheduled time.

Scheduled Scan Privilege Notification

To allow users to take advantage of Scheduled Scan privileges, remind them about the privileges you have granted them by configuring Control Manager to display a notification message before Scheduled Scan runs.

Firewall Privileges

Allow users to configure their own firewall settings. All user-configured settings cannot be overridden by settings deployed from the Control Manager server. For example, if the user disables Intrusion Detection System (IDS) and you enable IDS on the Control Manager server, IDS remains disabled on the OfficeScan agent endpoint.

Enable the following settings to allow users to configure the firewall:

- **Display the Firewall settings on the OfficeScan agent console**

The **Firewall** option displays all firewall settings on the OfficeScan agent and allows users with firewall privileges to configure their own settings.

- **Allow users to enable/disable the firewall, Intrusion Detection System, and the firewall violation notification message**

The Control Manager firewall protects agents and servers on the network using stateful inspection, high performance network virus scanning, and elimination. If you grant users the privilege to enable or disable the firewall and its features, warn them not to disable the firewall for an extended period of time to avoid exposing the endpoint to intrusions and hacker attacks.

If you do not grant users the privileges, the firewall settings you configure from the Control Manager server web console display under Network card list on the OfficeScan agent console.

- **Allow agents to send firewall logs to the OfficeScan server**

Select this option to analyze traffic the Control Manager firewall blocks and allows.

Behavior Monitoring Privileges

If agents have the Behavior Monitoring privileges, the Behavior Monitoring option displays on the **Settings** screen on the OfficeScan agent console. Users can then manage their own exception list.

C&C Contact Alert Notifications for Agent Users

Control Manager can display a notification message on OfficeScan agent computers immediately after blocking a C&C server URL. You need to enable the notification message and optionally modify the content of the notification message

Mail Scan Privileges and Other Settings

When agents have the mail scan privileges, the **Mail Scan** option displays on the OfficeScan agent console. The **Mail Scan** option shows the POP3 mail scan.

The following table describes the POP3 mail scan program.

TABLE E-17. Mail Scan Programs

DETAILS	DESCRIPTION
Purpose	Scans POP3 email messages for viruses/malware
Prerequisites	• Must be enabled by administrators from the web console before users can use it • Action against viruses/malware configurable from the OfficeScan agent console but not from the web console

DETAILS	DESCRIPTION
Scan types supported	Real-time Scan Scanning is done as email messages are retrieved from the POP3 mail server.
Scan results	- Information about detected security risks available after scanning is complete - Scan results not logged on the OfficeScan agent console's Logs screen - Scan results not sent to the server
Other details	Shares the OfficeScan NT Proxy Service (TMProxy.exe) with the web reputation feature

Granting Mail Scan Privileges and Enabling POP3 Mail Scan

Procedure

1. On the **Privileges** tab, go to the **Mail Scan** section.
2. Select **Display the Mail Scan settings on the agent console**.
3. Click the **Other Settings** tab and go to the **POP3 Email Scan Settings** section.
4. Select **Scan POP3 email**.

Proxy Configuration Privileges for Agents

You can grant agent users the privilege to configure proxy settings. OfficeScan agents use user-configured proxy settings only on the following instances:

- When OfficeScan agents perform "Update Now".
- When users disable, or the OfficeScan agent cannot detect, automatic proxy settings.

**WARNING!**

Incorrect user-configured proxy settings can cause update problems. Exercise caution when allowing users to configure their own proxy settings.

Configuring Update Privileges and Other Settings

Configure update settings and grant agent users certain privileges, such as performing "Update Now" and enabling scheduled update.

Procedure

1. Click the **Other Settings** tab and configure the following options in the **Update Settings** section:

Option	Description
OfficeScan agents download updates from the Trend Micro ActiveUpdate Server	When initiating updates, OfficeScan agents first get updates from the update source specified on the Client Update Source screen. If the update is unsuccessful, the agents attempt to update from the Control Manager server. Selecting this option enables agents to attempt to update from the Trend Micro ActiveUpdate server if the update from the Control Manager server is unsuccessful.  Note A pure IPv6 agent cannot update directly from the Trend Micro ActiveUpdate Server. A dual-stack proxy server that can convert IP addresses, such as DeleGate, is required to allow the agents to connect to the ActiveUpdate server.
Enable schedule-based updates on OfficeScan agents	Selecting this option configures all OfficeScan agents to enable schedule-based updates by default. Users with the Enable/Disable schedule-based updates privilege may override this setting.

Option	Description
OfficeScan agents can update components but not upgrade the agent program or deploy hot fixes	This option allows component updates to proceed but prevents hot fix deployment and OfficeScan agent upgrade.
	 Note Disabling this option may significantly affect server performance as all agents simultaneously connect to the server to upgrade or install a hot fix.

2. Click the **Privileges** tab and configure the following options in the **Component Updates** section:

Option	Description
Perform "Update Now"	Users with this privilege can update components on demand by right-clicking the OfficeScan agent icon on the system tray and selecting Update Now .
	 Note OfficeScan agent users can use proxy settings during "Update Now".
Enable/Disable schedule-based updates	Selecting this option allows OfficeScan agent users to enable and disable scheduled updates using the OfficeScan agent right-click menu, which can override the Enable schedule-based updates on OfficeScan agents setting.
	 Note Administrators must first select the Enable schedule-based updates on OfficeScan agents setting on the Other Settings tab before the menu item appears on the OfficeScan agent menu.

The OfficeScan Agent Uninstallation Program

Grant users the privilege to uninstall the OfficeScan agent program and then instruct them to run the agent uninstallation program from their computers.

Depending on your configuration, uninstallation may or may not require a password. If a password is required, ensure that you share the password only to users that will run the uninstallation program and then change the password immediately if it has been divulged to other users.

Granting the OfficeScan Agent Uninstallation Privilege

Procedure

1. On the **Privileges** tab, go to the **Uninstallation** section.
 2. To allow uninstallation without a password, select **Allow users to uninstall the OfficeScan agent**. If a password is required, select **Require a password for users to uninstall the OfficeScan agent**, type the password, and then confirm it.
-

OfficeScan Agent Unloading and Unlocking

The OfficeScan agent unloading and unlocking privilege allows users to temporarily stop the OfficeScan agent or gain access to advanced web console features with or without a password.

Granting the Agent Unloading and Unlocking Privilege

Procedure

1. On the **Privileges** tab, go to the **Unload and Unlock** section.
2. To allow OfficeScan agent unloading without a password, select **Does not require a password**.

- If a password is required, select **Requires a password**, type the password, and then confirm it.
-

Web Threat Notifications for Agent Users

Control Manager can display a notification message on the OfficeScan agent endpoint immediately after it blocks a URL that violates a web reputation policy. You need to enable the notification message and optionally modify the content of the notification message.

OfficeScan Agent Self-protection

OfficeScan agent self-protection provides ways for the OfficeScan agent to protect the processes and other resources required to function properly. OfficeScan agent self-protection helps thwart attempts by programs or actual users to disable anti-malware protection.

Protect OfficeScan Agent Services

Control Manager blocks all attempts to terminate the following OfficeScan agent services:

- OfficeScan NT Listener (TmListen.exe)
- OfficeScan NT RealTime Scan (NTRtScan.exe)
- OfficeScan NT Proxy Service (TmProxy.exe)
- OfficeScan NT Firewall (TmPfw.exe)
- OfficeScan Data Protection Service (dsagent.exe)
- Trend Micro Unauthorized Change Prevention Service (TMBMSRV.exe)

**Note**

If this option is enabled, Control Manager may prevent third-party products from installing successfully on endpoints. If you encounter this issue, you can temporarily disable the option and then re-enable it after the installation of the third-party product.

- Trend Micro Common Client Solution Framework (TmCCSF.exe)

Protect Files in the OfficeScan Agent Installation Folder

To prevent other programs and even the user from modifying or deleting OfficeScan agent files, Control Manager locks the following files in the root <Agent installation folder>:

- All digitally-signed files with .exe, .dll, and .sys extensions
- Some files without digital signatures, including:
 - bspatch.exe
 - bzip2.exe
 - INETWH32.dll
 - libcurl.dll
 - libeay32.dll
 - libMsgUtilExt.mt.dll
 - msvcm80.dll
 - MSVCP60.DLL
 - msvcp80.dll
 - msvcr80.dll
 - OfceSCV.dll
 - OFCESCVPack.exe
 - patchbld.dll

- patchw32.dll
- patchw64.dll
- PiReg.exe
- sslsleay32.dll
- Tmeng.dll
- TMNotify.dll
- zlibwapi.dll

Protect OfficeScan Agent Registry Keys

Control Manager blocks all attempts to modify, delete, or add new entries under the following registry keys and subkeys:

- HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\PC-cillinNTCorp\CurrentVersion
- HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\NSC
- HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\Osprey
- HKEY_LOCAL_MACHINE\SOFTWARE\TrendMicro\AMSP

Protect OfficeScan Agent Processes

Control Manager blocks all attempts to terminate the following processes:

- TmListen.exe: Receives commands and notifications from the Control Manager server and facilitates communication from the OfficeScan agent to the server
- NTRtScan.exe: Performs Real-time, Scheduled, and Manual Scan on OfficeScan agents
- TmProxy.exe: Scans network traffic before passing it to the target application
- TmPfw.exe: Provides packet level firewall, network virus scanning, and intrusion detection capabilities

- `TMBMSRV.exe`: Regulates access to external storage devices and prevents unauthorized changes to registry keys and processes
- `DSAgent.exe`: Monitors the transmission of sensitive data and controls access to devices
- `PccNTMon.exe`: This process is responsible for starting the OfficeScan agent console
- `TmCCSF.exe`: Performs Browser Exploit Prevention and memory scanning

Cache Settings for Scans

The OfficeScan agent can build the digital signature and on-demand scan cache files to improve its scan performance. When an on-demand scan runs, the OfficeScan agent first checks the digital signature cache file and then the on-demand scan cache file for files to exclude from the scan. Scanning time is reduced if a large number of files are excluded from the scan.

Digital Signature Cache

The digital signature cache file is used during Manual Scan, Scheduled Scan, and Scan Now. Agents do not scan files whose signatures have been added to the digital signature cache file.

The OfficeScan agent uses the same Digital Signature Pattern used for Behavior Monitoring to build the digital signature cache file. The Digital Signature Pattern contains a list of files that Trend Micro considers trustworthy and therefore can be excluded from scans.



Note

Behavior Monitoring is automatically disabled on Windows server platforms (64-bit support for Windows XP, 2003, and Vista without SP1 is not available). If the digital signature cache is enabled, OfficeScan agents on these platforms download the Digital Signature Pattern for use in the cache and do not download the other Behavior Monitoring components.

Agents build the digital signature cache file according to a schedule, which is configurable from the web console. Agents do this to:

- Add the signatures of new files that were introduced to the system since the last cache file was built
- Remove the signatures of files that have been modified or deleted from the system

During the cache building process, agents check the following folders for trustworthy files and then adds the signatures of these files to the digital signature cache file:

- %PROGRAMFILES%
- %WINDIR%

The cache building process does not affect the endpoint's performance because agents use minimal system resources during the process. Agents are also able to resume a cache building task that was interrupted for some reason (for example, when the host machine is powered off or when a wireless endpoint's AC adapter is unplugged).

On-demand Scan Cache

The on-demand scan cache file is used during Manual Scan, Scheduled Scan, and Scan Now. OfficeScan agents do not scan files whose caches have been added to the on-demand scan cache file.

Each time scanning runs, the OfficeScan agent checks the properties of threat-free files. If a threat-free file has not been modified for a certain period of time (the time period is configurable), the OfficeScan agent adds the cache of the file to the on-demand scan cache file. When the next scan occurs, the file will not be scanned if its cache has not expired.

The cache for a threat-free file expires within a certain number of days (the time period is also configurable). When scanning occurs on or after the cache expiration, the OfficeScan agent removes the expired cache and scans the file for threats. If the file is threat-free and remains unmodified, the cache of the file is added back to the on-demand scan cache file. If the file is threat-free but was recently modified, the cache is not added and the file will be scanned again on the next scan.

The cache for a threat-free file expires to prevent the exclusion of infected files from scans, as illustrated in the following examples:

- It is possible that a severely outdated pattern file may have treated an infected, unmodified file as threat-free. If the cache does not expire, the infected file remains in the system until it is modified and detected by Real-time Scan.
- If a cached file was modified and Real-time Scan is not functional during the file modification, the cache needs to expire so that the modified file can be scanned for threats.

The number of caches added to the on-demand scan cache file depends on the scan type and its scan target. For example, the number of caches may be less if the OfficeScan agent only scanned 200 of the 1,000 files in the endpoint during Manual Scan.

If on-demand scans are run frequently, the on-demand scan cache file reduces the scanning time significantly. In a scan task where all caches are not expired, scanning that usually takes 12 minutes can be reduced to 1 minute. Reducing the number of days a file must remain unmodified and extending the cache expiration usually improve the performance. Since files must remain unmodified for a relatively short period of time, more caches can be added to the cache file. The caches also expire longer, which means that more files are skipped from scans.

If on-demand scans are seldom run, you can disable the on-demand scan cache since caches would have expired when the next scan runs.

OfficeScan Agent Security

Control user access to the OfficeScan agent installation directory and registry settings by selecting from two security settings.

OfficeScan Agent Console Access Restriction

This setting disables OfficeScan agent console access from the system tray or Windows Start menu. The only way users can access the OfficeScan agent console is by double-clicking `PccNTMon.exe` from the <Agent installation folder>. After configuring this setting, reload the OfficeScan agent for the setting to take effect.

This setting does not disable the OfficeScan agent. The OfficeScan agent runs in the background and continues to provide protection from security risks.

Security Risk Notifications for OfficeScan Agent Users

Control Manager can display notification messages on OfficeScan agent endpoint:

- Immediately after Real-time Scan and Scheduled Scan detect virus/malware and spyware/grayware. Enable the notification message and optionally modify its content.
- If restarting the agent endpoint is necessary to finish cleaning infected files. For Real-time Scan, the message displays after a particular security risk has been scanned. For Manual Scan, Scheduled Scan, and Scan Now, the message displays once and only after Control Manager finishes scanning all the scan targets.

Configuring Real-time Scan Settings

Procedure

1. Select the following options:
 - Enable virus/malware scan
 - Enable spyware/grayware scan



Note

If you disable virus/malware scanning, spyware/grayware scanning also becomes disabled. During a virus outbreak, Real-time Scan cannot be disabled (or will automatically be enabled if initially disabled) to prevent the virus from modifying or deleting files and folders on agent computers.

2. Configure the following scan criteria:
 - [User Activity on Files on page E-58](#)
 - [Files to Scan on page E-59](#)
 - [Scan Settings on page E-59](#)
 - [Scan Exclusions on page E-61](#)
3. Click the **Action** tab and then configure the following:

TABLE E-18. Real-time Scan Actions

ACTION	REFERENCE
Virus/Malware action	Primary action (select one): • Use ActiveAction on page E-67 • Use the Same Action for all Virus/Malware Types on page E-68 • Use a Specific Action for Each Virus/Malware Type on page E-68  Note For details about the different actions, see Virus/Malware Scan Actions on page E-65. Additional virus/malware actions: • Quarantine Directory on page E-69 • Back Up Files Before Cleaning on page E-69 • Damage Cleanup Services on page E-71 • Display a Notification Message When Virus/Malware is Detected on page E-69 • Display a Notification Message When Probable Virus/Malware is Detected on page E-69
Spyware/Grayware action	Primary action: • Spyware/Grayware Scan Actions on page E-72 Additional spyware/grayware action: • Display a Notification Message When Spyware/Grayware is Detected on page E-73

User Activity on Files

Choose activities on files that will trigger Real-time Scan. Select from the following options:

- **Scan files being created/modified:** Scans new files introduced into the endpoint (for example, after downloading a file) or files being modified
- **Scan files being retrieved:** Scans files as they are opened
- **Scan files being created/modified and retrieved**

For example, if the third option is selected, a new file downloaded to the endpoint will be scanned and stays in its current location if no security risk is detected. The same file will be scanned when a user opens the file and, if the user modified the file, before the modifications are saved.

Files to Scan

Select from the following options:

- **All scannable files:** Scan all files
- **File types scanned by IntelliScan:** Only scan files known to potentially harbor malicious code, including files disguised by a harmless extension name.
- **Files with the following extensions:** Only scan files whose extensions are included in the file extension list. Add new extensions or remove any of the existing extensions.

Scan Settings

Select one or more of the following options:

- **Scan floppy disk during system shutdown:** Real-time Scan scans any floppy disk for boot viruses before shutting down the endpoint. This prevents any virus/malware from executing when a user reboots the endpoint from the disk.
- **Scan hidden folders:** Allows Control Manager to detect and then scan hidden folders on the endpoint during Manual Scan
- **Scan network drive:** Scans network drives or folders mapped to the OfficeScan agent endpoint during Manual Scan or Real-time Scan.

- **Scan the boot sector of the USB storage device after plugging in:** Automatically scans only the boot sector of a USB storage device every time the user plugs it in (Real-time Scan).
- **Scan all files in removable storage devices after plugging in:** Automatically scans all files on a USB storage device every time the user plugs it in (Real-time Scan).
- **Quarantine malware variants detected in memory:** Behavior Monitoring scans the system memory for suspicious processes and Real-Time Scan maps the process and scans it for malware threats. If a malware threat exists, Real-Time scan quarantines the process and/or file.

**Note**

This feature requires that administrators enable the Unauthorized Change Prevention Service and the Advanced Protection Service.

- **Scan compressed files:** Allows Control Manager to scan up to a specified number of compression layers and skip scanning any excess layers. Control Manager also cleans or deletes infected files within compressed files. For example, if the maximum is two layers and a compressed file to be scanned has six layers, Control Manager scans two layers and skips the remaining four. If a compressed file contains security threats, Control Manager cleans or deletes the file.

**Note**

Control Manager treats Microsoft Office 2007 files in Office Open XML format as compressed files. Office Open XML, the file format for Office 2007 applications, uses ZIP compression technologies. If you want files created using these applications to be scanned for viruses/malware, you need to enable scanning of compressed files.

- **Scan OLE objects:** When a file contains multiple Object Linking and Embedding (OLE) layers, Control Manager scans the specified number of layers and ignores the remaining layers.

All OfficeScan agents managed by the server check this setting during Manual Scan, Real-time Scan, Scheduled Scan, and Scan Now. Each layer is scanned for virus/malware and spyware/grayware.

For example:

The number of layers you specify is 2. Embedded within a file is a Microsoft Word document (first layer), within the Word document is a Microsoft Excel spreadsheet (second layer), and within the spreadsheet is an .exe file (third layer). Control Manager will scan the Word document and Excel spreadsheet, and skip the .exe file.

- **Detect exploit code in OLE files:** OLE Exploit Detection heuristically identifies malware by checking Microsoft Office files for exploit code.

**Note**

The specified number of layers is applicable to both **Scan OLE objects** and **Detect exploit code** options.

- **Enable IntelliTrap:** Detects and removes virus/malware on compressed executable files. This option is available only for Real-time Scan.
- **Scan boot area:** Scans the boot sector of the agent endpoint's hard disk for virus/malware during Manual Scan, Scheduled Scan and Scan Now

Scan Exclusions

Configure scan exclusions to increase the scanning performance and skip scanning files causing false alarms. When a particular scan type runs, Control Manager checks the scan exclusion list to determine which files on the endpoint will be excluded from both virus/malware and spyware/grayware scanning.

When you enable scan exclusion, Control Manager will not scan a file under the following conditions:

- The file is found under a specific directory (or any of its sub-directories).
- The file name matches any of the names in the exclusion list.
- The file extension matches any of the extensions in the exclusion list.

**Tip**

For a list of products that Trend Micro recommends excluding from Real-Time scans, go to:

<http://esupport.trendmicro.com/solution/en-US/1059770.aspx>

Wildcard Exceptions

Scan exclusion lists for files and directories support the use of wildcard characters. Use the "?" character to replace one character and "*" to replace several characters.

Use wildcard characters cautiously. Using the wrong character might exclude incorrect files or directories. For example, adding C:* to the Scan Exclusion List (Files) would exclude the entire C:\ drive.

TABLE E-19. Scan Exclusions Using Wildcard Characters

VALUE	EXCLUDED	NOT EXCLUDED
<code>c:\director*\fil *.txt</code>	c:\directory\fil\doc.txt c:\directories\fil\files document.txt	c:\directory\file\ c:\directories\files\ c:\directory\file\doc.txt c:\directories\files document.txt
<code>c:\director? \file*.txt</code>	c:\directory\file doc.txt	c:\directories\file document.txt
<code>c:\director? \file\?.txt</code>	c:\directory\file\l.txt	c:\directory\file\doc.txt c:\directories\file document.txt
<code>c:*.txt</code>	All .txt files in the C:\ directory	All other file types in the C:\ directory
<code>[]</code>	Not supported	Not supported
<code>*.*</code>	Not supported	Not supported

Scan Exclusion List (Directories)

Control Manager will not scan all files found under a specific directory on the computer. You can specify a maximum of 256 directories.



Note

By excluding a directory from scans, Control Manager automatically excludes all of the directory's sub-directories from scans.

You can also choose **Exclude directories where Trend Micro products are installed**. If you select this option, Control Manager automatically excludes the directories of the following Trend Micro products from scanning:

- <Server installation folder>
- ScanMail™ for Microsoft Exchange (all versions except version 7). If you use version 7, add the following folders to the exclusion list:
 - \Smex\Temp
 - \Smex\Storage
 - \Smex\ShareResPool
- ScanMail eManager™ 3.11, 5.1, 5.11, 5.12
- ScanMail for Lotus Notes™ eManager NT
- InterScan Web Security Suite
- InterScan Web Protect
- InterScan FTP VirusWall
- InterScan Web VirusWall
- InterScan E-mail VirusWall
- InterScan VirusWall 3.53
- InterScan NSAPI Plug-in
- InterScan eManager 3.5x

If you have a Trend Micro product NOT included in the list, add the product directories to the scan exclusion list.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.
- **Overwrites**: This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to**: This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from**: This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (Files)

Control Manager will not scan a file if its file name matches any of the names included in this exclusion list. If you want to exclude a file found under a specific location on the endpoint, include the file path, such as `C:\Temp\sample.jpg`.

You can specify a maximum of 256 files.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.
- **Overwrites**: This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to**: This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.

- **Removes paths from:** This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (File Extensions)

Control Manager will not scan a file if its file extension matches any of the extensions included in this exclusion list. You can specify a maximum of 256 file extensions. A period (.) is not required before the extension.

For Real-time Scan, use an asterisk (*) as a wildcard character when specifying extensions. For example, if you do not want to scan all files with extensions starting with D, such as DOC, DOT, or DAT, type **D***.

For Manual Scan, Scheduled Scan, and Scan Now, use a question mark (?) or asterisk (*) as a wildcard character.

Apply Scan Exclusion Settings to All Scan Types

Control Manager allows you to configure scan exclusion settings for a particular scan type and then apply the same settings to all the other scan types. For example:

On January 1, Control Manager administrator Chris found out that there are a large number of JPG files on agent computers and realized that these files do not pose any security threat. Chris added JPG in the file exclusion list for Manual Scan and then applied this setting to all scan types. Real-time Scan, Scan Now, and Scheduled Scan are now set to skip scanning .jpg files.

A week later, Chris removed JPG from the exclusion list for Real-time Scan but did not apply scan exclusion settings to all scan types. JPG files will now be scanned but only during Real-time Scan.

Virus/Malware Scan Actions

The scan action Control Manager performs depends on the virus/malware type and the scan type that detected the virus/malware. For example, when Control Manager detects a Trojan horse program (virus/malware type) during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Control Manager can perform against viruses/malware:

TABLE E-20. Virus/Malware Scan Actions

ACTION	DESCRIPTION
Delete	Control Manager deletes the infected file.
Quarantine	Control Manager renames and then moves the infected file to a temporary quarantine directory on the agent endpoint located in <Agent installation folder>\Suspect. The OfficeScan agent then sends quarantined files to the designated quarantine directory. The default quarantine directory is on the Control Manager server, under <Server installation file>\PCCSRV\Virus. Control Manager encrypts quarantined files sent to this directory. If you need to restore any of the quarantined files, use the VSEncrypt tool.
Clean	Control Manager cleans the infected file before allowing full access to the file. If the file is uncleanable, Control Manager performs a second action, which can be one of the following actions: Quarantine, Delete, Rename, and Pass. This action can be performed on all types of malware except probable virus/malware.
Rename	Control Manager changes the infected file's extension to ".vir". Users cannot open the renamed file initially, but can do so if they associate the file with a certain application. The virus/malware may execute when opening the renamed infected file.
Pass	Control Manager can only use this scan action when it detects any type of virus during Manual Scan, Scheduled Scan, and Scan Now. Control Manager cannot use this scan action during Real-time Scan because performing no action when an attempt to open or execute an infected file is detected will allow virus/malware to execute. All the other scan actions can be used during Real-time Scan.

ACTION	DESCRIPTION
Deny Access	This scan action can only be performed during Real-time Scan. When Control Manager detects an attempt to open or execute an infected file, it immediately blocks the operation. Users can manually delete the infected file.

Use ActiveAction

Different types of virus/malware require different scan actions. Customizing scan actions requires knowledge about virus/malware and can be a tedious task. Control Manager uses ActiveAction to counter these issues.

ActiveAction is a set of pre-configured scan actions for viruses/malware. If you are not familiar with scan actions or if you are not sure which scan action is suitable for a certain type of virus/malware, Trend Micro recommends using ActiveAction.

Using ActiveAction provides the following benefits:

- ActiveAction uses scan actions that are recommended by Trend Micro. You do not have to spend time configuring the scan actions.
- Virus writers constantly change the way virus/malware attack computers. ActiveAction settings are updated to protect against the latest threats and the latest methods of virus/malware attacks.



Note

ActiveAction is not available for spyware/grayware scan.

The following table illustrates how ActiveAction handles each type of virus/malware:

TABLE E-21. Trend Micro Recommended Scan Actions Against Viruses and Malware

VIRUS/MALWARE TYPE	REAL-TIME SCAN		MANUAL SCAN/SCHEDULED SCAN/ SCAN NOW	
	FIRST ACTION	SECOND ACTION	FIRST ACTION	SECOND ACTION
Joke program	Quarantine	Delete	Quarantine	Delete
Trojan horse program	Quarantine	Delete	Quarantine	Delete
Virus	Clean	Quarantine	Clean	Quarantine
Test virus	Deny Access	N/A	Pass	N/A
Packer	Quarantine	N/A	Quarantine	N/A
Others	Clean	Quarantine	Clean	Quarantine
Probable virus/ malware	Deny Access or user- configured action	N/A	Pass or user- configured action	N/A

For probable virus/malware, the default action is "Deny Access" during Real-time Scan and "Pass" during Manual Scan, Scheduled Scan, and Scan Now. If these are not your preferred actions, you can change them to Quarantine, Delete, or Rename.

Use the Same Action for all Virus/Malware Types

Select this option if you want the same action performed on all types of virus/malware, except probable virus/malware. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

If you choose "Clean" as the first action, Control Manager performs the second action when it detects probable virus/malware.

Use a Specific Action for Each Virus/Malware Type

Manually select a scan action for each virus/malware type.

For all virus/malware types except probable virus/malware, all scan actions are available. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

For probable virus/malware, all scan actions, except "Clean", are available.

Display a Notification Message When Virus/Malware is Detected

When Control Manager detects virus/malware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Display a Notification Message When Probable Virus/Malware is Detected

When Control Manager detects probable virus/malware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Back Up Files Before Cleaning

If Control Manager is set to clean an infected file, it can first back up the file. This allows you to restore the file in case you need it in the future. Control Manager encrypts the backup file to prevent it from being opened, and then stores the file on the <Agent installation folder>\Backup folder.

Quarantine Directory

If the action for an infected file is "Quarantine", the OfficeScan agent encrypts the file and moves it to a temporary quarantine folder located in <Agent installation folder>\SUSPECT and then sends the file to the designated quarantine directory.



Note

You can restore encrypted quarantined files in case you need to access them in the future.

Accept the default quarantine directory, which is located on the Control Manager server computer. The directory is in URL format and contains the server's host name or IP address.

- If the server is managing both IPv4 and IPv6 agents, use the host name so that all agents can send quarantined files to the server.
- If the server only has or is identified by its IPv4 address, only pure IPv4 and dual-stack agents can send quarantined files to the server.
- If the server only has or is identified by its IPv6 address, only pure IPv6 and dual-stack agents can send quarantined files to the server.

You can also specify an alternative quarantine directory by typing the location in URL, UNC path, or absolute file path format. Agents should be able to connect to this alternative directory. For example, the alternative directory should have an IPv6 address if it will receive quarantined files from dual-stack and pure IPv6 agents. Trend Micro recommends designating a dual-stack alternative directory, identifying the directory by its host name, and using UNC path when typing the directory.

Refer to the following table for guidance on when to use URL, UNC path, or absolute file path:

TABLE E-22. Quarantine Directory

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on the Control Manager server computer	URL	http://<osceserver>	This is the default directory.
	UNC path	\\<osceserver>\ofcscan\Virus	Configure settings for this directory, such as the size of the quarantine folder.

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on another Control Manager server computer (if you have other Control Manager servers on the network)	URL	http://<osceserver2>	Ensure that agents can connect to this directory. If you specify an incorrect directory, the OfficeScan agent keeps the quarantined files on the SUSPECT folder until a correct quarantine directory is specified. In the server's virus/malware logs, the scan result is "Unable to send the quarantined file to the designated quarantine folder".
	UNC path	\\<osceserver2>\ofcscan\Virus	
Another endpoint on the network	UNC path	\\<computer_name>\temp	
A different directory on the OfficeScan agent	Absolute path	C:\temp	If you use UNC path, ensure that the quarantine directory folder is shared to the group "Everyone" and that you assign read and write permission to this group.

Damage Cleanup Services

Damage Cleanup Services cleans computers of file-based and network viruses, and virus and worm remnants (Trojans, registry entries, and viral files).

The agent triggers Damage Cleanup Services before or after virus/malware scanning, depending on the scan type.

- When Manual Scan, Scheduled Scan, or Scan Now runs, the OfficeScan agent triggers Damage Cleanup Services first and then proceeds with virus/malware scanning. During virus/malware scanning, the agent may trigger Damage Cleanup Services again if cleanup is required.
- During Real-time Scan, the OfficeScan agent first performs virus/malware scanning and then triggers Damage Cleanup Services if cleanup is required.

You can select the type of cleanup that Damage Cleanup Services runs:

- Standard cleanup:** The OfficeScan agent performs any of the following actions during standard cleanup:
 - Detects and removes live Trojans

- Kills processes that Trojans create
- Repairs system files that Trojans modify
- Deletes files and applications that Trojans drop
- **Advanced cleanup:** In addition to the standard cleanup actions, the OfficeScan agent stops activities by rogue security software (also known as FakeAV) and certain rootkit variants. The OfficeScan agent also uses advanced cleanup rules to proactively detect and stop applications that exhibit FakeAV and rootkit behavior.

**Note**

While providing proactive protection, advanced cleanup also results in a high number of false-positives.

Damage Cleanup Services does not run cleanup on probable virus/malware unless you select the option **Run cleanup when probable virus/malware is detected**. You can only select this option if the action on probable virus/malware is not **Pass** or **Deny Access**. For example, if the OfficeScan agent detects probable virus/malware during Real-time Scan and the action is quarantine, the OfficeScan agent first quarantines the infected file and then runs cleanup if necessary. The cleanup type (standard or advanced) depends on your selection.

Spyware/Grayware Scan Actions

The scan action Control Manager performs depends on the scan type that detected the spyware/grayware. While specific actions can be configured for each virus/malware type, only one action can be configured for all types of spyware/grayware. For example, when Control Manager detects any type of spyware/grayware during Manual Scan (scan type), it cleans (action) the affected system resources.

The following are the actions Control Manager can perform against spyware/grayware:

TABLE E-23. Spyware/Grayware Scan Actions

ACTION	DESCRIPTION
Clean	Control Manager terminates processes or delete registries, files, cookies, and shortcuts. After cleaning spyware/grayware, OfficeScan agents back up spyware/grayware data, which you can restore if you consider the spyware/grayware safe to access.
Pass	Control Manager performs no action on detected spyware/grayware components but records the spyware/grayware detection in the logs. This action can only be performed during Manual Scan, Scheduled Scan, and Scan Now. During Real-time Scan, the action is "Deny Access". Control Manager will not perform any action if the detected spyware/grayware is included in the approved list.
Deny Access	Control Manager denies access (copy, open) to the detected spyware/grayware components. This action can only be performed during Real-time Scan. During Manual Scan, Scheduled Scan, and Scan Now, the action is "Pass".

Display a Notification Message When Spyware/Grayware is Detected

When Control Manager detects spyware/grayware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Managing the Spyware/Grayware Approved List

Procedure

1. On the **Spyware/Grayware names** table, select a spyware/grayware name. To select multiple names, hold the CTRL key while selecting.
 - You can also type a keyword in the **Search** field and click **Search**. Control Manager refreshes the table with the names that match the keyword.
2. Click **Add**.

The names move to the **Approved List** table.

3. To remove names from the approved list, select the names and click **Remove**. To select multiple names, hold the CTRL key while selecting.
-

Scan Method Types

OfficeScan agents can use one of two scan methods when scanning for security risks. The scan methods are smart scan and conventional scan.

- **Smart Scan**

Agents that use smart scan are referred to as **smart scan agents** in this document. Smart scan agents benefit from local scans and in-the-cloud queries provided by File Reputation Services.

- **Conventional Scan**

Agents that do not use smart scan are called **conventional scan agents**. A conventional scan agent stores all Control Manager components on the agent endpoint and scans all files locally.

Configuring Scan Now Settings

Procedure

1. Select the following options:
 - **Enable virus/malware scan**
 - **Enable spyware/grayware scan**



Note

If you disable virus/malware scanning, spyware/grayware scanning also becomes disabled.

2. Configure the following scan criteria:

- [Files to Scan on page E-75](#)
- [Scan Settings on page E-76](#)
- [CPU Usage on page E-78](#)
- [Scan Exclusions on page E-78](#)

3. Click the **Action** tab and then configure the following:

TABLE E-24. Scan Now Actions

ACTION	REFERENCE
Virus/Malware action	Primary action (select one): • Use ActiveAction on page E-84 • Use the Same Action for all Virus/Malware Types on page E-85 • Use a Specific Action for Each Virus/Malware Type on page E-85  Note For details about the different actions, see Virus/Malware Scan Actions on page E-83. Additional virus/malware actions: • Quarantine Directory on page E-86 • Back Up Files Before Cleaning on page E-86 • Damage Cleanup Services on page E-87
Spyware/Grayware action	Primary action: • Spyware/Grayware Scan Actions on page E-89

Files to Scan

Select from the following options:

- **All scannable files:** Scan all files
- **File types scanned by IntelliScan:** Only scan files known to potentially harbor malicious code, including files disguised by a harmless extension name.
- **Files with the following extensions:** Only scan files whose extensions are included in the file extension list. Add new extensions or remove any of the existing extensions.

Scan Settings

Select one or more of the following options:

- **Scan floppy disk during system shutdown:** Real-time Scan scans any floppy disk for boot viruses before shutting down the endpoint. This prevents any virus/malware from executing when a user reboots the endpoint from the disk.
- **Scan hidden folders:** Allows Control Manager to detect and then scan hidden folders on the endpoint during Manual Scan
- **Scan network drive:** Scans network drives or folders mapped to the OfficeScan agent endpoint during Manual Scan or Real-time Scan.
- **Scan the boot sector of the USB storage device after plugging in:** Automatically scans only the boot sector of a USB storage device every time the user plugs it in (Real-time Scan).
- **Scan all files in removable storage devices after plugging in:** Automatically scans all files on a USB storage device every time the user plugs it in (Real-time Scan).
- **Quarantine malware variants detected in memory:** Behavior Monitoring scans the system memory for suspicious processes and Real-Time Scan maps the process and scans it for malware threats. If a malware threat exists, Real-Time scan quarantines the process and/or file.



Note

This feature requires that administrators enable the Unauthorized Change Prevention Service and the Advanced Protection Service.

- **Scan compressed files:** Allows Control Manager to scan up to a specified number of compression layers and skip scanning any excess layers. Control Manager also cleans or deletes infected files within compressed files. For example, if the maximum is two layers and a compressed file to be scanned has six layers, Control Manager scans two layers and skips the remaining four. If a compressed file contains security threats, Control Manager cleans or deletes the file.

**Note**

Control Manager treats Microsoft Office 2007 files in Office Open XML format as compressed files. Office Open XML, the file format for Office 2007 applications, uses ZIP compression technologies. If you want files created using these applications to be scanned for viruses/malware, you need to enable scanning of compressed files.

- **Scan OLE objects:** When a file contains multiple Object Linking and Embedding (OLE) layers, Control Manager scans the specified number of layers and ignores the remaining layers.

All OfficeScan agents managed by the server check this setting during Manual Scan, Real-time Scan, Scheduled Scan, and Scan Now. Each layer is scanned for virus/malware and spyware/grayware.

For example:

The number of layers you specify is 2. Embedded within a file is a Microsoft Word document (first layer), within the Word document is a Microsoft Excel spreadsheet (second layer), and within the spreadsheet is an .exe file (third layer). Control Manager will scan the Word document and Excel spreadsheet, and skip the .exe file.

- **Detect exploit code in OLE files:** OLE Exploit Detection heuristically identifies malware by checking Microsoft Office files for exploit code.

**Note**

The specified number of layers is applicable to both **Scan OLE objects** and **Detect exploit code** options.

- **Enable IntelliTrap:** Detects and removes virus/malware on compressed executable files. This option is available only for Real-time Scan.

- **Scan boot area:** Scans the boot sector of the agent endpoint's hard disk for virus/malware during Manual Scan, Scheduled Scan and Scan Now

CPU Usage

Control Manager can pause after scanning one file and before scanning the next file. This setting is used during Manual Scan, Scheduled Scan, and Scan Now.

Select from the following options:

- **High:** No pausing between scans
- **Medium:** Pause between file scans if CPU consumption is higher than 50%, and do not pause if 50% or lower
- **Low:** Pause between file scans if CPU consumption is higher than 20%, and do not pause if 20% or lower

If you choose Medium or Low, when scanning is launched and CPU consumption is within the threshold (50% or 20%), Control Manager will not pause between scans, resulting in faster scanning time. Control Manager uses more CPU resource in the process but because CPU consumption is optimal, endpoint performance is not drastically affected. When CPU consumption begins to exceed the threshold, Control Manager pauses to reduce CPU usage, and stops pausing when consumption is within the threshold again.

If you choose High, Control Manager does not check the actual CPU consumption and scans files without pausing.

Scan Exclusions

Configure scan exclusions to increase the scanning performance and skip scanning files causing false alarms. When a particular scan type runs, Control Manager checks the scan exclusion list to determine which files on the endpoint will be excluded from both virus/malware and spyware/grayware scanning.

When you enable scan exclusion, Control Manager will not scan a file under the following conditions:

- The file is found under a specific directory (or any of its sub-directories).

- The file name matches any of the names in the exclusion list.
- The file extension matches any of the extensions in the exclusion list.



Tip

For a list of products that Trend Micro recommends excluding from Real-Time scans, go to:

<http://esupport.trendmicro.com/solution/en-US/1059770.aspx>

Wildcard Exceptions

Scan exclusion lists for files and directories support the use of wildcard characters. Use the "?" character to replace one character and "*" to replace several characters.

Use wildcard characters cautiously. Using the wrong character might exclude incorrect files or directories. For example, adding C:* to the Scan Exclusion List (Files) would exclude the entire C:\ drive.

TABLE E-25. Scan Exclusions Using Wildcard Characters

VALUE	EXCLUDED	NOT EXCLUDED
<code>c:\director*\fil *.txt</code>	c:\directory\fil\doc.txt c:\directories\fil\files document.txt	c:\directory\file\ c:\directories\files\ c:\directory\file\doc.txt c:\directories\files document.txt
<code>c:\director? \file*.txt</code>	c:\directory\file doc.txt	c:\directories\file document.txt
<code>c:\director? \file\?.txt</code>	c:\directory\file\1.txt	c:\directory\file\doc.txt c:\directories\file document.txt
<code>c:*.txt</code>	All .txt files in the C:\ directory	All other file types in the C:\ directory

VALUE	EXCLUDED	NOT EXCLUDED
[]	Not supported	Not supported
.	Not supported	Not supported

Scan Exclusion List (Directories)

Control Manager will not scan all files found under a specific directory on the computer. You can specify a maximum of 256 directories.



Note

By excluding a directory from scans, Control Manager automatically excludes all of the directory's sub-directories from scans.

You can also choose **Exclude directories where Trend Micro products are installed**. If you select this option, Control Manager automatically excludes the directories of the following Trend Micro products from scanning:

- <Server installation folder>
- ScanMail™ for Microsoft Exchange (all versions except version 7). If you use version 7, add the following folders to the exclusion list:
 - \Smex\Temp
 - \Smex\Storage
 - \Smex\ShareResPool
- ScanMail eManager™ 3.11, 5.1, 5.11, 5.12
- ScanMail for Lotus Notes™ eManager NT
- InterScan Web Security Suite
- InterScan Web Protect
- InterScan FTP VirusWall
- InterScan Web VirusWall

- InterScan E-mail VirusWall
- InterScan VirusWall 3.53
- InterScan NSAPI Plug-in
- InterScan eManager 3.5x

If you have a Trend Micro product NOT included in the list, add the product directories to the scan exclusion list.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.
- **Overwrites**: This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to**: This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from**: This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (Files)

Control Manager will not scan a file if its file name matches any of the names included in this exclusion list. If you want to exclude a file found under a specific location on the endpoint, include the file path, such as C:\Temp\sample.jpg.

You can specify a maximum of 256 files.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.

- **Overwrites:** This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to:** This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from:** This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (File Extensions)

Control Manager will not scan a file if its file extension matches any of the extensions included in this exclusion list. You can specify a maximum of 256 file extensions. A period (.) is not required before the extension.

For Real-time Scan, use an asterisk (*) as a wildcard character when specifying extensions. For example, if you do not want to scan all files with extensions starting with D, such as DOC, DOT, or DAT, type **D***.

For Manual Scan, Scheduled Scan, and Scan Now, use a question mark (?) or asterisk (*) as a wildcard character.

Apply Scan Exclusion Settings to All Scan Types

Control Manager allows you to configure scan exclusion settings for a particular scan type and then apply the same settings to all the other scan types. For example:

On January 1, Control Manager administrator Chris found out that there are a large number of JPG files on agent computers and realized that these files do not pose any security threat. Chris added JPG in the file exclusion list for Manual Scan and then applied this setting to all scan types. Real-time Scan, Scan Now, and Scheduled Scan are now set to skip scanning .jpg files.

A week later, Chris removed JPG from the exclusion list for Real-time Scan but did not apply scan exclusion settings to all scan types. JPG files will now be scanned but only during Real-time Scan.

Virus/Malware Scan Actions

The scan action Control Manager performs depends on the virus/malware type and the scan type that detected the virus/malware. For example, when Control Manager detects a Trojan horse program (virus/malware type) during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Control Manager can perform against viruses/malware:

TABLE E-26. Virus/Malware Scan Actions

ACTION	DESCRIPTION
Delete	Control Manager deletes the infected file.
Quarantine	Control Manager renames and then moves the infected file to a temporary quarantine directory on the agent endpoint located in <Agent installation folder>\Suspect. The OfficeScan agent then sends quarantined files to the designated quarantine directory. The default quarantine directory is on the Control Manager server, under <Server installation file>\PCCSRV\Virus. Control Manager encrypts quarantined files sent to this directory. If you need to restore any of the quarantined files, use the VSEncrypt tool.
Clean	Control Manager cleans the infected file before allowing full access to the file. If the file is uncleanable, Control Manager performs a second action, which can be one of the following actions: Quarantine, Delete, Rename, and Pass. This action can be performed on all types of malware except probable virus/malware.
Rename	Control Manager changes the infected file's extension to ".vir". Users cannot open the renamed file initially, but can do so if they associate the file with a certain application. The virus/malware may execute when opening the renamed infected file.

ACTION	DESCRIPTION
Pass	Control Manager can only use this scan action when it detects any type of virus during Manual Scan, Scheduled Scan, and Scan Now. Control Manager cannot use this scan action during Real-time Scan because performing no action when an attempt to open or execute an infected file is detected will allow virus/malware to execute. All the other scan actions can be used during Real-time Scan.
Deny Access	This scan action can only be performed during Real-time Scan. When Control Manager detects an attempt to open or execute an infected file, it immediately blocks the operation. Users can manually delete the infected file.

Use ActiveAction

Different types of virus/malware require different scan actions. Customizing scan actions requires knowledge about virus/malware and can be a tedious task. Control Manager uses ActiveAction to counter these issues.

ActiveAction is a set of pre-configured scan actions for viruses/malware. If you are not familiar with scan actions or if you are not sure which scan action is suitable for a certain type of virus/malware, Trend Micro recommends using ActiveAction.

Using ActiveAction provides the following benefits:

- ActiveAction uses scan actions that are recommended by Trend Micro. You do not have to spend time configuring the scan actions.
- Virus writers constantly change the way virus/malware attack computers. ActiveAction settings are updated to protect against the latest threats and the latest methods of virus/malware attacks.



Note

ActiveAction is not available for spyware/grayware scan.

The following table illustrates how ActiveAction handles each type of virus/malware:

TABLE E-27. Trend Micro Recommended Scan Actions Against Viruses and Malware

VIRUS/MALWARE TYPE	REAL-TIME SCAN		MANUAL SCAN/SCHEDULED SCAN/ SCAN NOW	
	FIRST ACTION	SECOND ACTION	FIRST ACTION	SECOND ACTION
Joke program	Quarantine	Delete	Quarantine	Delete
Trojan horse program	Quarantine	Delete	Quarantine	Delete
Virus	Clean	Quarantine	Clean	Quarantine
Test virus	Deny Access	N/A	Pass	N/A
Packer	Quarantine	N/A	Quarantine	N/A
Others	Clean	Quarantine	Clean	Quarantine
Probable virus/ malware	Deny Access or user- configured action	N/A	Pass or user- configured action	N/A

For probable virus/malware, the default action is "Deny Access" during Real-time Scan and "Pass" during Manual Scan, Scheduled Scan, and Scan Now. If these are not your preferred actions, you can change them to Quarantine, Delete, or Rename.

Use the Same Action for all Virus/Malware Types

Select this option if you want the same action performed on all types of virus/malware, except probable virus/malware. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

If you choose "Clean" as the first action, Control Manager performs the second action when it detects probable virus/malware.

Use a Specific Action for Each Virus/Malware Type

Manually select a scan action for each virus/malware type.

For all virus/malware types except probable virus/malware, all scan actions are available. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

For probable virus/malware, all scan actions, except "Clean", are available.

Back Up Files Before Cleaning

If Control Manager is set to clean an infected file, it can first back up the file. This allows you to restore the file in case you need it in the future. Control Manager encrypts the backup file to prevent it from being opened, and then stores the file on the <Agent installation folder>\Backup folder.

Quarantine Directory

If the action for an infected file is "Quarantine", the OfficeScan agent encrypts the file and moves it to a temporary quarantine folder located in <Agent installation folder>\SUSPECT and then sends the file to the designated quarantine directory.



Note

You can restore encrypted quarantined files in case you need to access them in the future.

Accept the default quarantine directory, which is located on the Control Manager server computer. The directory is in URL format and contains the server's host name or IP address.

- If the server is managing both IPv4 and IPv6 agents, use the host name so that all agents can send quarantined files to the server.
- If the server only has or is identified by its IPv4 address, only pure IPv4 and dual-stack agents can send quarantined files to the server.
- If the server only has or is identified by its IPv6 address, only pure IPv6 and dual-stack agents can send quarantined files to the server.

You can also specify an alternative quarantine directory by typing the location in URL, UNC path, or absolute file path format. Agents should be able to connect to this alternative directory. For example, the alternative directory should have an IPv6 address

if it will receive quarantined files from dual-stack and pure IPv6 agents. Trend Micro recommends designating a dual-stack alternative directory, identifying the directory by its host name, and using UNC path when typing the directory.

Refer to the following table for guidance on when to use URL, UNC path, or absolute file path:

TABLE E-28. Quarantine Directory

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on the Control Manager server computer	URL	<code>http://<osceserver></code>	This is the default directory. Configure settings for this directory, such as the size of the quarantine folder.
	UNC path	<code>\\<osceserver>\ofcscan\Virus</code>	
A directory on another Control Manager server computer (if you have other Control Manager servers on the network)	URL	<code>http://<osceserver2></code>	Ensure that agents can connect to this directory. If you specify an incorrect directory, the OfficeScan agent keeps the quarantined files on the SUSPECT folder until a correct quarantine directory is specified. In the server's virus/malware logs, the scan result is "Unable to send the quarantined file to the designated quarantine folder".
	UNC path	<code>\\<osceserver2>\ofcscan\Virus</code>	
Another endpoint on the network	UNC path	<code>\\<computer_name>\temp</code>	
A different directory on the OfficeScan agent	Absolute path	<code>C:\temp</code>	If you use UNC path, ensure that the quarantine directory folder is shared to the group "Everyone" and that you assign read and write permission to this group.

Damage Cleanup Services

Damage Cleanup Services cleans computers of file-based and network viruses, and virus and worm remnants (Trojans, registry entries, and viral files).

The agent triggers Damage Cleanup Services before or after virus/malware scanning, depending on the scan type.

- When Manual Scan, Scheduled Scan, or Scan Now runs, the OfficeScan agent triggers Damage Cleanup Services first and then proceeds with virus/malware scanning. During virus/malware scanning, the agent may trigger Damage Cleanup Services again if cleanup is required.
- During Real-time Scan, the OfficeScan agent first performs virus/malware scanning and then triggers Damage Cleanup Services if cleanup is required.

You can select the type of cleanup that Damage Cleanup Services runs:

- **Standard cleanup:** The OfficeScan agent performs any of the following actions during standard cleanup:
 - Detects and removes live Trojans
 - Kills processes that Trojans create
 - Repairs system files that Trojans modify
 - Deletes files and applications that Trojans drop
- **Advanced cleanup:** In addition to the standard cleanup actions, the OfficeScan agent stops activities by rogue security software (also known as FakeAV) and certain rootkit variants. The OfficeScan agent also uses advanced cleanup rules to proactively detect and stop applications that exhibit FakeAV and rootkit behavior.

**Note**

While providing proactive protection, advanced cleanup also results in a high number of false-positives.

Damage Cleanup Services does not run cleanup on probable virus/malware unless you select the option **Run cleanup when probable virus/malware is detected**. You can only select this option if the action on probable virus/malware is not **Pass** or **Deny Access**. For example, if the OfficeScan agent detects probable virus/malware during Real-time Scan and the action is quarantine, the OfficeScan agent first quarantines the infected file and then runs cleanup if necessary. The cleanup type (standard or advanced) depends on your selection.

Spyware/Grayware Scan Actions

The scan action Control Manager performs depends on the scan type that detected the spyware/grayware. While specific actions can be configured for each virus/malware type, only one action can be configured for all types of spyware/grayware. For example, when Control Manager detects any type of spyware/grayware during Manual Scan (scan type), it cleans (action) the affected system resources.

The following are the actions Control Manager can perform against spyware/grayware:

TABLE E-29. Spyware/Grayware Scan Actions

ACTION	DESCRIPTION
Clean	Control Manager terminates processes or delete registries, files, cookies, and shortcuts. After cleaning spyware/grayware, OfficeScan agents back up spyware/grayware data, which you can restore if you consider the spyware/grayware safe to access.
Pass	Control Manager performs no action on detected spyware/grayware components but records the spyware/grayware detection in the logs. This action can only be performed during Manual Scan, Scheduled Scan, and Scan Now. During Real-time Scan, the action is "Deny Access". Control Manager will not perform any action if the detected spyware/grayware is included in the approved list.
Deny Access	Control Manager denies access (copy, open) to the detected spyware/grayware components. This action can only be performed during Real-time Scan. During Manual Scan, Scheduled Scan, and Scan Now, the action is "Pass".

Configuring a Scheduled Scan

Procedure

1. Select the following options:
 - **Enable virus/malware scan**
 - **Enable spyware/grayware scan**



Note

If you disable virus/malware scanning, spyware/grayware scanning also becomes disabled.

2. Configure the following scan criteria:
 - *Schedule on page E-91*
 - *Files to Scan on page E-92*
 - *Scan Settings on page E-92*
 - *CPU Usage on page E-94*
 - *Scan Exclusions on page E-95*
3. Click the **Action** tab and then configure the following:

TABLE E-30. Scheduled Scan Actions

ACTION	REFERENCE
Virus/Malware action	Primary action (select one): • Use ActiveAction on page E-101 • Use the Same Action for all Virus/Malware Types on page E-102 • Use a Specific Action for Each Virus/Malware Type on page E-102  Note For details about the different actions, see Virus/Malware Scan Actions on page E-99. Additional virus/malware actions: • Quarantine Directory on page E-103 • Back Up Files Before Cleaning on page E-103 • Damage Cleanup Services on page E-105 • Display a Notification Message When Virus/Malware is Detected on page E-103 • Display a Notification Message When Probable Virus/Malware is Detected on page E-103
Spyware/Grayware action	Primary action: • Spyware/Grayware Scan Actions on page E-106 Additional spyware/grayware action: • Display a Notification Message When Spyware/Grayware is Detected on page E-107

Schedule

Configure how often (daily, weekly, or monthly) and what time Scheduled Scan will run.

For monthly Scheduled Scans, you can choose either a particular day of a month or a day of a week and the order of its occurrence.

- **A particular day of a month:** Select between the 1st and 31st day. If you selected the 29th, 30th, or 31st day and a month does not have this day, Control Manager runs Scheduled Scan on the last day of the month. Therefore:
 - If you selected 29, Scheduled Scan runs on February 28 (except on a leap year) and on the 29th day of all the other months.
 - If you selected 30, Scheduled Scan runs on February 28 or 29, and on the 30th day of all the other months.
 - If you selected 31, Scheduled Scan runs on February 28 or 29, April 30, June 30, September 30, November 30, and on the 31st day of all the other months.
- **A day of a week and the order of its occurrence:** A day of a week occurs four or five times a month. For example, there are typically four Mondays in a month. Specify a day of a week and the order in which it occurs during a month. For example, choose to run Scheduled Scan on the second Monday of each month. If you choose the fifth occurrence of a day and it does not exist during a particular month, the scan runs on the fourth occurrence.

Files to Scan

Select from the following options:

- **All scannable files:** Scan all files
- **File types scanned by IntelliScan:** Only scan files known to potentially harbor malicious code, including files disguised by a harmless extension name.
- **Files with the following extensions:** Only scan files whose extensions are included in the file extension list. Add new extensions or remove any of the existing extensions.

Scan Settings

Select one or more of the following options:

- **Scan floppy disk during system shutdown:** Real-time Scan scans any floppy disk for boot viruses before shutting down the endpoint. This prevents any virus/malware from executing when a user reboots the endpoint from the disk.
- **Scan hidden folders:** Allows Control Manager to detect and then scan hidden folders on the endpoint during Manual Scan
- **Scan network drive:** Scans network drives or folders mapped to the OfficeScan agent endpoint during Manual Scan or Real-time Scan.
- **Scan the boot sector of the USB storage device after plugging in:** Automatically scans only the boot sector of a USB storage device every time the user plugs it in (Real-time Scan).
- **Scan all files in removable storage devices after plugging in:** Automatically scans all files on a USB storage device every time the user plugs it in (Real-time Scan).
- **Quarantine malware variants detected in memory:** Behavior Monitoring scans the system memory for suspicious processes and Real-Time Scan maps the process and scans it for malware threats. If a malware threat exists, Real-Time scan quarantines the process and/or file.

**Note**

This feature requires that administrators enable the Unauthorized Change Prevention Service and the Advanced Protection Service.

- **Scan compressed files:** Allows Control Manager to scan up to a specified number of compression layers and skip scanning any excess layers. Control Manager also cleans or deletes infected files within compressed files. For example, if the maximum is two layers and a compressed file to be scanned has six layers, Control Manager scans two layers and skips the remaining four. If a compressed file contains security threats, Control Manager cleans or deletes the file.

**Note**

Control Manager treats Microsoft Office 2007 files in Office Open XML format as compressed files. Office Open XML, the file format for Office 2007 applications, uses ZIP compression technologies. If you want files created using these applications to be scanned for viruses/malware, you need to enable scanning of compressed files.

- **Scan OLE objects:** When a file contains multiple Object Linking and Embedding (OLE) layers, Control Manager scans the specified number of layers and ignores the remaining layers.

All OfficeScan agents managed by the server check this setting during Manual Scan, Real-time Scan, Scheduled Scan, and Scan Now. Each layer is scanned for virus/malware and spyware/grayware.

For example:

The number of layers you specify is 2. Embedded within a file is a Microsoft Word document (first layer), within the Word document is a Microsoft Excel spreadsheet (second layer), and within the spreadsheet is an .exe file (third layer). Control Manager will scan the Word document and Excel spreadsheet, and skip the .exe file.

- **Detect exploit code in OLE files:** OLE Exploit Detection heuristically identifies malware by checking Microsoft Office files for exploit code.

**Note**

The specified number of layers is applicable to both **Scan OLE objects** and **Detect exploit code** options.

- **Enable IntelliTrap:** Detects and removes virus/malware on compressed executable files. This option is available only for Real-time Scan.
- **Scan boot area:** Scans the boot sector of the agent endpoint's hard disk for virus/malware during Manual Scan, Scheduled Scan and Scan Now

CPU Usage

Control Manager can pause after scanning one file and before scanning the next file. This setting is used during Manual Scan, Scheduled Scan, and Scan Now.

Select from the following options:

- **High:** No pausing between scans
- **Medium:** Pause between file scans if CPU consumption is higher than 50%, and do not pause if 50% or lower

- **Low:** Pause between file scans if CPU consumption is higher than 20%, and do not pause if 20% or lower

If you choose Medium or Low, when scanning is launched and CPU consumption is within the threshold (50% or 20%), Control Manager will not pause between scans, resulting in faster scanning time. Control Manager uses more CPU resource in the process but because CPU consumption is optimal, endpoint performance is not drastically affected. When CPU consumption begins to exceed the threshold, Control Manager pauses to reduce CPU usage, and stops pausing when consumption is within the threshold again.

If you choose High, Control Manager does not check the actual CPU consumption and scans files without pausing.

Scan Exclusions

Configure scan exclusions to increase the scanning performance and skip scanning files causing false alarms. When a particular scan type runs, Control Manager checks the scan exclusion list to determine which files on the endpoint will be excluded from both virus/malware and spyware/grayware scanning.

When you enable scan exclusion, Control Manager will not scan a file under the following conditions:

- The file is found under a specific directory (or any of its sub-directories).
- The file name matches any of the names in the exclusion list.
- The file extension matches any of the extensions in the exclusion list.



Tip

For a list of products that Trend Micro recommends excluding from Real-Time scans, go to:

<http://esupport.trendmicro.com/solution/en-US/1059770.aspx>

Wildcard Exceptions

Scan exclusion lists for files and directories support the use of wildcard characters. Use the "?" character to replace one character and "*" to replace several characters.

Use wildcard characters cautiously. Using the wrong character might exclude incorrect files or directories. For example, adding `C:\*` to the Scan Exclusion List (Files) would exclude the entire `C:\` drive.

TABLE E-31. Scan Exclusions Using Wildcard Characters

VALUE	EXCLUDED	NOT EXCLUDED
<code>c:\director*\fil *.txt</code>	<code>c:\directory\fil\doc.txt</code> <code>c:\directories\fil\files \document.txt</code>	<code>c:\directory\file\</code> <code>c:\directories\files\</code> <code>c:\directory\file\doc.txt</code> <code>c:\directories\files \document.txt</code>
<code>c:\director? \file*.txt</code>	<code>c:\directory\file \doc.txt</code>	<code>c:\directories\file \document.txt</code>
<code>c:\director? \file\?.txt</code>	<code>c:\directory\file\l.txt</code>	<code>c:\directory\file\doc.txt</code> <code>c:\directories\file \document.txt</code>
<code>c:*.txt</code>	All .txt files in the <code>C:\</code> directory	All other file types in the <code>C:\</code> directory
<code>[]</code>	Not supported	Not supported
<code>*.*</code>	Not supported	Not supported

Scan Exclusion List (Directories)

Control Manager will not scan all files found under a specific directory on the computer. You can specify a maximum of 256 directories.



Note

By excluding a directory from scans, Control Manager automatically excludes all of the directory's sub-directories from scans.

You can also choose **Exclude directories where Trend Micro products are installed**. If you select this option, Control Manager automatically excludes the directories of the following Trend Micro products from scanning:

- <Server installation folder>
- ScanMail™ for Microsoft Exchange (all versions except version 7). If you use version 7, add the following folders to the exclusion list:
 - \Smex\Temp
 - \Smex\Storage
 - \Smex\ShareResPool
- ScanMail eManager™ 3.11, 5.1, 5.11, 5.12
- ScanMail for Lotus Notes™ eManager NT
- InterScan Web Security Suite
- InterScan Web Protect
- InterScan FTP VirusWall
- InterScan Web VirusWall
- InterScan E-mail VirusWall
- InterScan VirusWall 3.53
- InterScan NSAPI Plug-in
- InterScan eManager 3.5x

If you have a Trend Micro product NOT included in the list, add the product directories to the scan exclusion list.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.

- **Overwrites:** This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to:** This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from:** This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (Files)

Control Manager will not scan a file if its file name matches any of the names included in this exclusion list. If you want to exclude a file found under a specific location on the endpoint, include the file path, such as `C:\Temp\sample.jpg`.

You can specify a maximum of 256 files.

When you configure the file list, choose from the following options:

- **Retains current list** (default): Control Manager provides this option to prevent the accidental overwriting of the agent's existing exclusion list. In order to save and deploy changes made to the exclusion list, select any of the other options.
- **Overwrites:** This option removes and replaces the entire exclusion list on the agent with the current list. After clicking **Apply to All Agents**, Control Manager displays a confirmation warning message.
- **Adds paths to:** This option adds the items in the current list to the agent's existing exclusion list. If an item already exists in the agent's exclusion list, the agent ignores the item.
- **Removes paths from:** This option removes the items in the current list from the agent's existing exclusion list, if found.

Scan Exclusion List (File Extensions)

Control Manager will not scan a file if its file extension matches any of the extensions included in this exclusion list. You can specify a maximum of 256 file extensions. A period (.) is not required before the extension.

For Real-time Scan, use an asterisk (*) as a wildcard character when specifying extensions. For example, if you do not want to scan all files with extensions starting with D, such as DOC, DOT, or DAT, type **D***.

For Manual Scan, Scheduled Scan, and Scan Now, use a question mark (?) or asterisk (*) as a wildcard character.

Apply Scan Exclusion Settings to All Scan Types

Control Manager allows you to configure scan exclusion settings for a particular scan type and then apply the same settings to all the other scan types. For example:

On January 1, Control Manager administrator Chris found out that there are a large number of JPG files on agent computers and realized that these files do not pose any security threat. Chris added JPG in the file exclusion list for Manual Scan and then applied this setting to all scan types. Real-time Scan, Scan Now, and Scheduled Scan are now set to skip scanning .jpg files.

A week later, Chris removed JPG from the exclusion list for Real-time Scan but did not apply scan exclusion settings to all scan types. JPG files will now be scanned but only during Real-time Scan.

Virus/Malware Scan Actions

The scan action Control Manager performs depends on the virus/malware type and the scan type that detected the virus/malware. For example, when Control Manager detects a Trojan horse program (virus/malware type) during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Control Manager can perform against viruses/malware:

TABLE E-32. Virus/Malware Scan Actions

ACTION	DESCRIPTION
Delete	Control Manager deletes the infected file.

ACTION	DESCRIPTION
Quarantine	Control Manager renames and then moves the infected file to a temporary quarantine directory on the agent endpoint located in <Agent installation folder>\Suspect. The OfficeScan agent then sends quarantined files to the designated quarantine directory. The default quarantine directory is on the Control Manager server, under <Server installation file>\PCCSRV\Virus. Control Manager encrypts quarantined files sent to this directory. If you need to restore any of the quarantined files, use the VSEncrypt tool.
Clean	Control Manager cleans the infected file before allowing full access to the file. If the file is uncleanable, Control Manager performs a second action, which can be one of the following actions: Quarantine, Delete, Rename, and Pass. This action can be performed on all types of malware except probable virus/malware.
Rename	Control Manager changes the infected file's extension to ".vir". Users cannot open the renamed file initially, but can do so if they associate the file with a certain application. The virus/malware may execute when opening the renamed infected file.
Pass	Control Manager can only use this scan action when it detects any type of virus during Manual Scan, Scheduled Scan, and Scan Now. Control Manager cannot use this scan action during Real-time Scan because performing no action when an attempt to open or execute an infected file is detected will allow virus/malware to execute. All the other scan actions can be used during Real-time Scan.
Deny Access	This scan action can only be performed during Real-time Scan. When Control Manager detects an attempt to open or execute an infected file, it immediately blocks the operation. Users can manually delete the infected file.

Use ActiveAction

Different types of virus/malware require different scan actions. Customizing scan actions requires knowledge about virus/malware and can be a tedious task. Control Manager uses ActiveAction to counter these issues.

ActiveAction is a set of pre-configured scan actions for viruses/malware. If you are not familiar with scan actions or if you are not sure which scan action is suitable for a certain type of virus/malware, Trend Micro recommends using ActiveAction.

Using ActiveAction provides the following benefits:

- ActiveAction uses scan actions that are recommended by Trend Micro. You do not have to spend time configuring the scan actions.
- Virus writers constantly change the way virus/malware attack computers. ActiveAction settings are updated to protect against the latest threats and the latest methods of virus/malware attacks.



Note

ActiveAction is not available for spyware/grayware scan.

The following table illustrates how ActiveAction handles each type of virus/malware:

TABLE E-33. Trend Micro Recommended Scan Actions Against Viruses and Malware

VIRUS/MALWARE TYPE	REAL-TIME SCAN		MANUAL SCAN/SCHEDULED SCAN/ SCAN NOW	
	FIRST ACTION	SECOND ACTION	FIRST ACTION	SECOND ACTION
Joke program	Quarantine	Delete	Quarantine	Delete
Trojan horse program	Quarantine	Delete	Quarantine	Delete
Virus	Clean	Quarantine	Clean	Quarantine
Test virus	Deny Access	N/A	Pass	N/A

VIRUS/MALWARE TYPE	REAL-TIME SCAN		MANUAL SCAN/SCHEDULED SCAN/ SCAN NOW	
	FIRST ACTION	SECOND ACTION	FIRST ACTION	SECOND ACTION
Packer	Quarantine	N/A	Quarantine	N/A
Others	Clean	Quarantine	Clean	Quarantine
Probable virus/ malware	Deny Access or user- configured action	N/A	Pass or user- configured action	N/A

For probable virus/malware, the default action is "Deny Access" during Real-time Scan and "Pass" during Manual Scan, Scheduled Scan, and Scan Now. If these are not your preferred actions, you can change them to Quarantine, Delete, or Rename.

Use the Same Action for all Virus/Malware Types

Select this option if you want the same action performed on all types of virus/malware, except probable virus/malware. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

If you choose "Clean" as the first action, Control Manager performs the second action when it detects probable virus/malware.

Use a Specific Action for Each Virus/Malware Type

Manually select a scan action for each virus/malware type.

For all virus/malware types except probable virus/malware, all scan actions are available. If you choose "Clean" as the first action, select a second action that Control Manager performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable.

For probable virus/malware, all scan actions, except "Clean", are available.

Display a Notification Message When Virus/Malware is Detected

When Control Manager detects virus/malware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Display a Notification Message When Probable Virus/Malware is Detected

When Control Manager detects probable virus/malware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Back Up Files Before Cleaning

If Control Manager is set to clean an infected file, it can first back up the file. This allows you to restore the file in case you need it in the future. Control Manager encrypts the backup file to prevent it from being opened, and then stores the file on the <Agent installation folder>\Backup folder.

Quarantine Directory

If the action for an infected file is "Quarantine", the OfficeScan agent encrypts the file and moves it to a temporary quarantine folder located in <Agent installation folder>\SUSPECT and then sends the file to the designated quarantine directory.



Note

You can restore encrypted quarantined files in case you need to access them in the future.

Accept the default quarantine directory, which is located on the Control Manager server computer. The directory is in URL format and contains the server's host name or IP address.

- If the server is managing both IPv4 and IPv6 agents, use the host name so that all agents can send quarantined files to the server.

- If the server only has or is identified by its IPv4 address, only pure IPv4 and dual-stack agents can send quarantined files to the server.
- If the server only has or is identified by its IPv6 address, only pure IPv6 and dual-stack agents can send quarantined files to the server.

You can also specify an alternative quarantine directory by typing the location in URL, UNC path, or absolute file path format. Agents should be able to connect to this alternative directory. For example, the alternative directory should have an IPv6 address if it will receive quarantined files from dual-stack and pure IPv6 agents. Trend Micro recommends designating a dual-stack alternative directory, identifying the directory by its host name, and using UNC path when typing the directory.

Refer to the following table for guidance on when to use URL, UNC path, or absolute file path:

TABLE E-34. Quarantine Directory

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on the Control Manager server computer	URL	<code>http://<osceserver></code>	This is the default directory.
	UNC path	<code>\\<osceserver>\ofcscan\Virus</code>	Configure settings for this directory, such as the size of the quarantine folder.

QUARANTINE DIRECTORY	ACCEPTED FORMAT	EXAMPLE	NOTES
A directory on another Control Manager server computer (if you have other Control Manager servers on the network)	URL	http://<osceserver2>	Ensure that agents can connect to this directory. If you specify an incorrect directory, the OfficeScan agent keeps the quarantined files on the SUSPECT folder until a correct quarantine directory is specified. In the server's virus/malware logs, the scan result is "Unable to send the quarantined file to the designated quarantine folder".
	UNC path	\\<osceserver2>\ofcscan\Virus	
Another endpoint on the network	UNC path	\\<computer_name>\temp	
A different directory on the OfficeScan agent	Absolute path	C:\temp	If you use UNC path, ensure that the quarantine directory folder is shared to the group "Everyone" and that you assign read and write permission to this group.

Damage Cleanup Services

Damage Cleanup Services cleans computers of file-based and network viruses, and virus and worm remnants (Trojans, registry entries, and viral files).

The agent triggers Damage Cleanup Services before or after virus/malware scanning, depending on the scan type.

- When Manual Scan, Scheduled Scan, or Scan Now runs, the OfficeScan agent triggers Damage Cleanup Services first and then proceeds with virus/malware scanning. During virus/malware scanning, the agent may trigger Damage Cleanup Services again if cleanup is required.
- During Real-time Scan, the OfficeScan agent first performs virus/malware scanning and then triggers Damage Cleanup Services if cleanup is required.

You can select the type of cleanup that Damage Cleanup Services runs:

- **Standard cleanup:** The OfficeScan agent performs any of the following actions during standard cleanup:
 - Detects and removes live Trojans

- Kills processes that Trojans create
- Repairs system files that Trojans modify
- Deletes files and applications that Trojans drop
- **Advanced cleanup:** In addition to the standard cleanup actions, the OfficeScan agent stops activities by rogue security software (also known as FakeAV) and certain rootkit variants. The OfficeScan agent also uses advanced cleanup rules to proactively detect and stop applications that exhibit FakeAV and rootkit behavior.

**Note**

While providing proactive protection, advanced cleanup also results in a high number of false-positives.

Damage Cleanup Services does not run cleanup on probable virus/malware unless you select the option **Run cleanup when probable virus/malware is detected**. You can only select this option if the action on probable virus/malware is not **Pass** or **Deny Access**. For example, if the OfficeScan agent detects probable virus/malware during Real-time Scan and the action is quarantine, the OfficeScan agent first quarantines the infected file and then runs cleanup if necessary. The cleanup type (standard or advanced) depends on your selection.

Spyware/Grayware Scan Actions

The scan action Control Manager performs depends on the scan type that detected the spyware/grayware. While specific actions can be configured for each virus/malware type, only one action can be configured for all types of spyware/grayware. For example, when Control Manager detects any type of spyware/grayware during Manual Scan (scan type), it cleans (action) the affected system resources.

The following are the actions Control Manager can perform against spyware/grayware:

TABLE E-35. Spyware/Grayware Scan Actions

ACTION	DESCRIPTION
Clean	Control Manager terminates processes or delete registries, files, cookies, and shortcuts. After cleaning spyware/grayware, OfficeScan agents back up spyware/grayware data, which you can restore if you consider the spyware/grayware safe to access.
Pass	Control Manager performs no action on detected spyware/grayware components but records the spyware/grayware detection in the logs. This action can only be performed during Manual Scan, Scheduled Scan, and Scan Now. During Real-time Scan, the action is "Deny Access". Control Manager will not perform any action if the detected spyware/grayware is included in the approved list.
Deny Access	Control Manager denies access (copy, open) to the detected spyware/grayware components. This action can only be performed during Real-time Scan. During Manual Scan, Scheduled Scan, and Scan Now, the action is "Pass".

Display a Notification Message When Spyware/Grayware is Detected

When Control Manager detects spyware/grayware during Real-time Scan and Scheduled Scan, it can display a notification message to inform the user about the detection.

Assigning OfficeScan Agents as Update Agents

Procedure

1. Select the items that Update Agents can share.
 - Component updates
 - Domain settings
 - OfficeScan agent programs and hot fixes

Configuring a Web Reputation Policy

Before you begin

Specify proxy server authentication credentials if you have set up a proxy server to handle HTTP communication in your organization and authentication is required before web access is allowed.

Procedure

1. Click the **External Clients** tab to configure a policy for external agents or the **Internal Clients** tab to configure a policy for internal agents.
2. Select **Enable Web reputation policy on the following operating systems**.



Tip

Trend Micro recommends disabling web reputation for internal agents if you already use a Trend Micro product with the web reputation capability, such as InterScan Web Security Virtual Appliance.

When a web reputation policy is enabled:

- External agents send web reputation queries to the Smart Protection Network.
 - Internal agents send web reputation queries to:
 - Smart Protection Servers if the **Send queries to Smart Protection Servers** option is enabled. For details about this option, see step 7.
 - Smart Protection Network if the **Send queries to Smart Protection Servers** option is disabled.
3. Select **Enable assessment**.

**Note**

When in assessment mode, agents will allow access to all websites but will log access to websites that are supposed to be blocked if assessment was disabled. Trend Micro provides assessment mode to allow you to evaluate websites and then take appropriate action based on your evaluation. For example, websites that you consider safe can be added to the approved list.

4. Select Check HTTPS URLs.

HTTPS communication uses certificates to identify web servers. It encrypts data to prevent theft and eavesdropping. Although more secure, accessing websites using HTTPS still has risks. Compromised sites, even those with valid certificates, can host malware and steal personal information. In addition, certificates are relatively easy to obtain, making it easy to set up malicious web servers that use HTTPS.

Enable checking of HTTPS URLs to reduce exposure to compromised and malicious sites that use HTTPS. Control Manager can monitor HTTPS traffic on the following browsers:

TABLE E-36. Supported Browsers for HTTPS Traffic

BROWSER	VERSION
Microsoft Internet Explorer	• 6 with SP2 or higher • 7.x • 8.x • 9.x • 10.x • 11.x
Mozilla Firefox	3.5 or later
Chrome	N/A

**Important**

- HTTPS scanning only supports Windows 8 or Windows 2012 platforms operating in desktop mode.
- After enabling HTTPS scanning for the first time on OfficeScan agents running Internet Explorer 9, 10, or 11, users must enable the `TmIEPlugInBHO Class` add-on in the browser pop-up window before HTTPS scanning is operational.

For more information on configuring Internet Explorer settings for web reputation, see the following Knowledge Base article:

- <http://esupport.trendmicro.com/solution/en-us/1060643.aspx>
-

5. Select **Scan common HTTP ports only** to restrict web reputation scanning to traffic through ports 80, 81, and 8080. By default, Control Manager scans all traffic through all ports.
6. Select **Send queries to Smart Protection Servers** if you want internal agents to send web reputation queries to Smart Protection Servers.
 - If you enable this option:
 - Agents refer to the smart protection source list to determine the Smart Protection Servers to which they send queries.
 - Be sure that Smart Protection Servers are available. If all Smart Protection Servers are unavailable, agents do not send queries to Smart Protection Network. The only remaining sources of web reputation data for agents are the approved and blocked URL lists (configured in step 10).
 - Be sure to update Smart Protection Servers regularly so that protection remains current.
 - Agents will not block untested websites. Smart Protection Servers do not store web reputation data for these websites.
 - If you disable this option:
 - Agents send web reputation queries to Smart Protection Network. Agent computers must have Internet connection to send queries successfully.

- Agents will block untested websites if you select **Block pages that have not been tested by Trend Micro** in step 9.

7. Select from the available web reputation security levels: **High, Medium, or Low**



Note

The security levels determine whether Control Manager will allow or block access to a URL. For example, if you set the security level to Low, Control Manager only blocks URLs that are known to be web threats. As you set the security level higher, the web threat detection rate improves but the possibility of false positives also increases.

8. If you disabled the **Send queries to Smart Protection Servers** option in step 7, you can select **Block pages that have not been tested by Trend Micro**.



Note

While Trend Micro actively tests web pages for safety, users may encounter untested pages when visiting new or less popular websites. Blocking access to untested pages can improve safety but can also prevent access to safe pages.

9. Select **Block pages containing malicious script** to identify web browser exploits and malicious scripts, and prevent the use of these threats from compromising the web browser.

Control Manager utilizes both the Browser Exploit Prevention pattern and the Script Analyzer pattern to identify and block web pages before exposing the system.

TABLE E-37. Supported Browsers for Browser Exploit Prevention

BROWSER	VERSION
Microsoft Internet Explorer	• 7.x • 8.x • 9.x • 10.x • 11.x

**Important**

The Browser Exploit Prevention feature requires that you enable the Advanced Protection Service.

10. Configure the approved and blocked lists.**Note**

The approved list takes precedence over the blocked list. When a URL matches an entry in the approved list, agents always allows access to the URL, even if it is in the blocked list.

- a. Select **Enable approved/blocked list**.
- b. Type a URL.

You can add a wildcard character (*) anywhere on the URL.

For example:

- Typing `www.trendmicro.com/*` means that all pages in the Trend Micro website will be approved.
- Typing `*.trendmicro.com/*` means that all pages on any sub-domain of trendmicro.com will be approved.

You can type URLs containing IP addresses. If a URL contains an IPv6 address, enclose the address in parentheses.

- c. Click **Add to Approved List** or **Add to Blocked List**.
- d. To export the list to a `.dat` file, click **Export** and then click **Save**.
- e. If you have exported a list from another server and want to import it to this screen, click **Import** and locate the `.dat` file. The list loads on the screen.

**Important**

Web Reputation does not perform any scanning on addresses located in the Approved and Blocked lists.

11. To submit web reputation feedback, click the URL provided under **Reassess URL**. The Trend Micro Web Reputation Query system opens in a browser window.
 12. Select whether to allow the OfficeScan agent to send web reputation logs to the server. Allow agents to send logs if you want to analyze URLs being blocked by Control Manager and take the appropriate action on URLs you think are safe to access.
-

OfficeScan DLP Settings

This section contains information on configuring OfficeScan DLP settings for policy management.

Creating a Data Loss Prevention Policy

Procedure

1. Click the **External Agents** tab to configure a policy for external agents or the **Internal Agents** tab to configure a policy for internal agents.



Note

Configure agent location settings if you have not done so. Agents use these location settings to determine the correct Data Loss Prevention policy to apply. For details, see the *OfficeScan Administrator's Guide*.

2. Select **Enable Data Loss Prevention**.
3. Choose one of the following:
 - If you are on the **External Agents** tab, you can apply all Data Loss Prevention settings to internal agents by selecting **Apply all settings to internal agents**.

- If you are on the **Internal Agents** tab, you can apply all Data Loss Prevention settings to external agents by selecting **Apply all settings to external agents**.
4. On the **Rules** tab, click **Add**.
A policy can contain a maximum of 40 rules.
 5. Configure the rule settings.
For details creating DLP rules, see [Creating Data Loss Prevention Rules on page E-114](#).
 6. Click the **Exceptions** tab and configure any necessary exception settings.
For details on the available exception settings, see [Data Loss Prevention Exceptions on page E-120](#).
-

Creating Data Loss Prevention Rules



Note

Data Loss Prevention processes rules and templates by priority. If a rule is set to “Pass”, Data Loss Prevention processes the next rule in the list. If a rule is set to “Block” or “User Justification”, Data Loss Prevention blocks or accepts the user action and does not process that rule/template further.

Procedure

1. Select **Enable this rule**.
2. Specify a name for the rule.
Configure the template settings:
3. Click the **Template** tab.
4. Select templates from the **Available templates** list and then click **Add**.
When selecting templates:
 - Select multiple entries by clicking the template names which highlights the name.

- Use the search feature if you have a specific template in mind. You can type the full or partial name of the template.

**Note**

Each rule can contain a maximum of 200 templates.

Configure the channel settings:

5. Click the **Channel** tab.
6. Select the channels for the rule.

For details about channels, see [Network Channels on page E-116](#) and [System and Application Channels on page E-118](#).

7. If you selected any of the network channels, select the transmission scope:

- **All transmissions**
- **Only transmissions outside the Local Area Network**

See [Transmission Scope and Targets for Network Channels on page E-116](#) for details on transmission scope, how targets work depending on the transmission scope, and how to define targets correctly.

8. If you selected **Email clients**:
 - a. Click **Exceptions**.
 - b. Specify monitored and non-monitored internal email domains. For details on monitored and non-monitored email domains, see [Email Clients on page E-117](#).
9. If you selected **Removable storage**:
 - a. Click **Exceptions**.
 - b. Add non-monitored removable storage devices, identifying them by their vendors. The device model and serial ID are optional.

The approved list for USB devices supports the use of the asterisk (*) wildcard. Replace any field with the asterisk (*) to include all devices that satisfy the other fields.

For example, [vendor]-[model]-* places all USB devices from the specified vendor and the specified model type, regardless of serial ID, to the approved list.

- c. To add more devices, click the plus (+) icon.

Configure the action settings:

10. Click the **Action** tab.
 11. Select a primary action and any additional actions. For details about actions, see [Data Loss Prevention Actions on page E-119](#).
 12. After configuring the **Template**, **Channel**, and **Action** settings, click **Save**.
-

Transmission Scope and Targets for Network Channels

Transmission scope and targets define data transmissions on network channels that Control Manager must monitor. For transmissions that should be monitored, Control Manager checks for the presence of data identifiers before allowing or blocking the transmission. For transmissions that should not be monitored, Control Manager does not check for the presence of data identifiers and immediately allows the transmission.

Network Channels

Control Manager can monitor data transmission through the following network channels:

- Email clients
- FTP
- HTTP and HTTPS
- IM Applications
- SMB protocol
- Webmail

To determine data transmissions to monitor, Control Manager checks the transmission scope, which you need to configure. Depending on the scope that you selected, Control

Manager will monitor all data transmissions or only transmissions outside the Local Area Network (LAN).

Email Clients

Control Manager monitors email transmitted through various email agents. Control Manager checks the email's subject, body, and attachments for data identifiers. For a list of supported email agents, see the *Data Protection Lists* document at:

<http://docs.trendmicro.com/en-us/enterprise/officescan.aspx>

Monitoring occurs when a user attempts to send the email. If the email contains data identifiers, Control Manager will either allow or block the email.

You can define monitored and non-monitored internal email domains.

- **Monitored email domains:** When Control Manager detects email transmitted to a monitored domain, it checks the action for the policy. Depending on the action, the transmission is allowed or blocked.



Note

If you select email agents as a monitored channel, an email must match a policy for it to be monitored. In contrast, an email sent to monitored email domains is automatically monitored, even if it does not match a policy.

- **Non-monitored email domains:** Control Manager immediately allows the transmission of emails sent to non-monitored domains.



Note

Data transmissions to non-monitored email domains and to monitored email domains where "Monitor" is the action are similar in that the transmission is allowed. The only difference is that for non-monitored email domains, Control Manager does not log the transmission, whereas for monitored email domains, the transmission is always logged.

Specify domains using any of the following formats, separating multiple domains with commas:

- X400 format, such as /O=Trend/OU=USA, /O=Trend/OU=China

- Email domains, such as example.com

For email messages sent through the SMTP protocol, Control Manager checks if the target SMTP server is on the following lists:

1. Monitored targets
2. Non-monitored targets
3. Monitored email domains
4. Non-monitored email domains

This means that if an email is sent to an SMTP server on the monitored targets list, the email is monitored. If the SMTP server is not on the monitored targets list, Control Manager checks the other lists.

For emails sent through other protocols, Control Manager only checks the following lists:

1. Monitored email domains
2. Non-monitored email domains

System and Application Channels

Control Manager can monitor the following system and application channels:

- Cloud storage
- Data recorders (CD/DVD)
- Peer-to-peer applications
- Printer
- Removable storage
- Synchronization software (ActiveSync)
- Windows clipboard

Device List Tool

Run the Device List Tool locally on each endpoint to query external devices connected to the endpoint. The tool scans an endpoint for external devices and then displays device information in a browser window. You can then use the information when configuring device settings for Data Loss Prevention and Device Control.

Running the Device List Tool

Procedure

1. On the Control Manager server computer, go to <Server installation folder>\PCCSRV\Admin\Utility\ListDeviceInfo.
 2. Copy listDeviceInfo.exe to the target endpoint.
 3. On the endpoint, run the listDeviceInfo.exe.
 4. View device information in the browser window that displays. Data Loss Prevention and Device Control use the following information:
 - Vendor (required)
 - Model (optional)
 - Serial ID (optional)
-

Data Loss Prevention Actions

When Data Loss Prevention detects the transmission of data identifiers, it checks the DLP policy for the detected data identifiers and performs the action configured for the policy.

The following table lists the Data Loss Prevention actions.

TABLE E-38. Data Loss Prevention Actions

ACTION	DESCRIPTION
Actions	

ACTION	DESCRIPTION
Pass	Data Loss Prevention allows and logs the transmission.
Block	Data Loss Prevention blocks and logs the transmission.
Additional Actions	
Notify the agent user	Data Loss Prevention displays a notification message to inform the user of the data transmission and whether it was passed or blocked.
Record data	Regardless of the primary action, Data Loss Prevention records the sensitive information to <code><Client installation folder>\DLPLite\Forensic</code>. Select this action to evaluate sensitive information that is being flagged by Data Loss Prevention. Recorded sensitive information may consume too much hard disk space. Therefore, Trend Micro highly recommends that you choose this option only for highly sensitive information.
User justification  Note This option is only available after selecting the Block action.	Data Loss Prevention prompts the user before performing the “Block” action. User can select to override the “Block” action by providing an explanation as to why the sensitive data is safe to pass. The available justification reasons are: • This is part of an established business process. • My manager approved the data transfer. • The data in this file is not confidential. • I did not know that transferring this data was restricted. • Other: Users provide an alternate explanation in the text field provided.

Data Loss Prevention Exceptions

DLP exceptions apply to the entire policy, including all rules defined within the policy. Data Loss Prevention applies the exception settings to all transmissions before scanning

for digital assets. If a transmission matches one of the exception rules, Data Loss Prevention immediately allows or scans the transmission depending on the exception type.

Defining Non-monitored and Monitored Targets

Define the non-monitored and monitored targets based on the transmission scope configured on the **Channel** tab. For details on how to define non-monitored and monitored targets for **All transmissions**, see [Transmission Scope: All Transmissions on page E-122](#). For details on how to define non-monitored and monitored targets for **Only transmissions outside the Local Area Network**, see [Transmission Scope: Only Transmissions Outside the Local Area Network on page E-123](#).

Follow these guidelines when defining monitored and non-monitored targets:

1. Define each target by:
 - IP address
 - Host name
 - FQDN
 - Network address and subnet mask, such as 10.1.1.1/32



Note

For the subnet mask, Data Loss Prevention only supports a classless inter-domain routing (CIDR) type port. That means that you can only type a number like 32 instead of 255.255.255.0.

2. To target specific channels, include the default or company-defined port numbers for those channels. For example, port 21 is typically for FTP traffic, port 80 for HTTP, and port 443 for HTTPS. Use a colon to separate the target from the port numbers.
3. You can also include port ranges. To include all ports, ignore the port range.

Below are some examples of targets with port numbers and port ranges:

- 10.1.1.1:80

- host:5-20
 - host.domain.com:20
 - 10.1.1.1/32:20
4. Separate targets with commas.

Transmission Scope: All Transmissions

Control Manager monitors data transmitted outside the host computer.



Note

Trend Micro recommends choosing this scope for external agents.

If you do not want to monitor data transmissions to certain targets outside the host computer, define the following:

- **Non-monitored targets:** Control Manager does not monitor data transmitted to these targets.



Note

Data transmissions to non-monitored targets and to monitored targets where "Monitor" is the action are similar in that the transmission is allowed. The only difference is that for non-monitored targets, Control Manager does not log the transmission, whereas for monitored targets, the transmission is always logged.

- **Monitored targets:** These are specific targets within the non-monitored targets that should be monitored. Monitored targets are:
 - Optional if you defined non-monitored targets.
 - Not configurable if you did not define non-monitored targets.

For example:

The following IP addresses are assigned to your company's Legal Department:

- 10.201.168.1 to 10.201.168.25

You are creating a policy that monitors the transmission of Employment Certificates to all employees except the Legal Department's full time staff. To do this, you would select **All transmissions** as the transmission scope and then:

Option 1:

1. Add 10.201.168.1-10.201.168.25 to the non-monitored targets.
2. Add the IP addresses of the Legal Department's part-time staff to the monitored targets. Assume that there are 3 IP addresses, 10.201.168.21-10.201.168.23.

Option 2:

Add the IP addresses of the Legal Department's full time staff to the non-monitored targets:

- 10.201.168.1-10.201.168.20
- 10.201.168.24-10.201.168.25

For guidelines on defining monitored and non-monitored targets, see [Defining Non-monitored and Monitored Targets on page E-121](#).

Transmission Scope: Only Transmissions Outside the Local Area Network

Control Manager monitors data transmitted to any target outside the Local Area Network (LAN).



Note

Trend Micro recommends choosing this scope for internal agents.

"Network" refers to the company or local network. This includes the current network (IP address of the endpoint and netmask) and the following standard private IP addresses:

- Class A: 10.0.0.0 to 10.255.255.255
- Class B: 172.16.0.0 to 172.31.255.255
- Class C: 192.168.0.0 to 192.168.255.255

If you select this transmission scope, you can define the following:

- **Non-monitored targets:** Define targets outside the LAN that you consider safe and therefore should not be monitored.

**Note**

Data transmissions to non-monitored targets and to monitored targets where "Monitor" is the action are similar in that the transmission is allowed. The only difference is that for non-monitored targets, Control Manager does not log the transmission, whereas for monitored targets, the transmission is always logged.

- **Monitored targets:** Define targets within the LAN that you want to monitor.

For guidelines on defining monitored and non-monitored targets, see [Defining Non-monitored and Monitored Targets on page E-121](#).

Decompression Rules

Files contained in compressed files can be scanned for digital assets. To determine the files to scan, Data Loss Prevention subjects a compressed file to the following rules:

Creating Data Discovery Policies

Data Discovery searches databases, endpoints and document management systems for the presence of sensitive information. Data Discovery widgets display data loss prevention compliance with an enterprise's policy. Using Data Discovery policies and widgets administrators can then perform remediation actions on their network.

**Note**

Performing a full scan of an endpoint drive or directory can cause significant system slowdown for end users.

Procedure

1. Select **Enable this rule**.
2. Specify a name for the rule.

Configure the target folder settings:

3. Click the **Target Folder** tab.

**Note**

The root folder cannot be a Windows shared folder or removable device (USB device or DVD).

4. Specify the scan location for files under **File Path**.

**Note**

Data Discovery does not scan `autoexec.bat` files the following file paths:

- `\Documents and Settings\*\Application Data\`
 - `\Documents and Settings\*\Local Settings\`
 - `\Documents and Settings\*\Cookies\`
 - `\Program Files\`
 - `\Windows\`
 - `\Winnt\`
 - `\Users\*\AppData\`
 - `\ProgramData\`
-

5. Specify scanning exceptions under **File Type Exceptions**.

- **Scan:** Specify specific files or file types to scan.
- **Do not scan:** Specify specific files, file types, or folders that Data Discovery will not scan.

**Note**

Data Discovery supports the following wildcard characters:

- *: Substitute for any and all characters before or after the *
- ?: Substitute for a single character or a single double-byte character

Separate multiple entries with pipes (|) and use the following format:

- For files: *.<file extension> (for example: *.exe|*.doc)
- For folders: Specify a file path (for example: *\\Test*|C:\\My-Docs\\)

Configure the template settings:

6. Click the **Template** tab.
7. Select templates from the **Available templates** list and then click **Add**.

When selecting templates:

- Select multiple entries by clicking the template names which highlights the name.
- Use the search feature if you have a specific template in mind. You can type the full or partial name of the template.

**Note**

Each rule can contain a maximum of 500 templates.

Configure the action settings:

8. Click the **Action** tab.
9. Specify one or more of the following:
 - **Monitor:** Detections are recorded for analysis
 - **Encrypt with the following:** Sensitive files are encrypted using one of the following methods and administrators can configure passwords to access encrypted sensitive files:
 - **User key**

- **Group key**
- **Encryption password:** The encryption password is a global password for all OfficeScan servers.

Configure the schedule for the scan:

10. Click the **Schedule** tab.
 11. Specify the frequency of the scan.
 12. Specify the time the scan starts.
 13. After configuring the **Target Folder**, **Template**, **Action**, and **Schedule** settings, click **Save**.
-

ScanMail for Microsoft Exchange Product Settings

This section contains information on configuring ScanMail for Microsoft Exchange settings for policy management.

Configuring a Data Loss Prevention Policy

Data Loss Prevention policies govern the actions ScanMail takes when it discovers sensitive information in email messages.

Configure Data Loss Prevention policies through the following five step process:

1. *Selecting Accounts on page E-128*
2. *Configuring DLP Targets on page E-128*
3. *Configuring DLP Actions on page E-129*
4. *Configuring DLP Notifications on page E-130*
5. *Enabling a DLP Policy on page E-130*

Selecting Accounts

Procedure

1. Add or edit a policy:
 - For new policies:
Click **Add**.
 - For pre-existing policies:
 - a. Click the policy name.
 - b. Click the **Accounts** tab.
 2. Select **Anyone** or **Specific accounts** on the **Select Accounts** screen.
 3. Search and select AD Users/Groups/Contacts/Special Groups and add them to the Selected Account(s) list.
 4. Search and select AD Users/Groups/Contacts/Special Groups and add them to the Selected Account(s) list on the **Exclude Accounts** screen.
-

Configuring DLP Targets

Procedure

1. Add or edit a policy:
 - For new policies:
 - a. Click **Add**.
 - b. Go to the **Specify Rule** screen.
 - For pre-existing policies:
 - a. Click the policy name.
 - b. Click the **Target** tab.

2. Select the check box(es) for the target area(s) of the email message to scan. Available targets are **Header** (**From**, **To**, and **Cc**), **Subject**, **Body**, and **Attachment**.
3. Select templates from the list of available templates and click **Add >>** to apply them to your policy.

**Note**

A Data Loss Prevention policy requires selecting at least one template before activation.

Configuring DLP Actions

Procedure

1. Add or edit a policy:
 - For new policies:
 - a. Click **Add**.
 - b. Go to the **Specify Action** screen.
 - For pre-existing policies:
 - a. Click the policy name.
 - b. Click the **Action** tab.
2. Select an action for ScanMail to take when it detects undesirable content.
3. To notify specific individuals:
 - Select the check box **Forward to sender's manager**.
 - Select the check box **Forward to specific email address(es)** and type the email address of the recipients.
4. Specify whether to send notifications when an action is taken by selecting **Notify** or **Do not notify**.

5. Configure **Advanced Options** as necessary.
-

Configuring DLP Notifications

Procedure

1. Add or edit a policy:
 - For new policies:
 - a. Click **Add**.
 - b. Go to the **Specify Notification** screen.
 - For pre-existing policies:
 - a. Click the policy name.
 - b. Click the **Action** tab.
 2. Click on the check boxes corresponding to the people ScanMail will notify.
 3. Click **Show details** to customize the notification for that recipient.
 4. Select from the notification options.
 5. Click **Write to Windows event log** to have ScanMail write the notification to a Windows event log.
-

Enabling a DLP Policy

Procedure

1. Add or edit a policy before enabling:
 - For new policies:
 - a. Click **Add**.
 - b. Go to the **Name and Priority** screen.

- For pre-existing policies:
Click the policy name.
 - 2. Select to enable this policy.
 - 3. Type the name of your policy in the **Policy name** space.
 - 4. Specify the priority of the policy.
 - For new policies:
Type the priority of your policy in the **Priority** space.
 - For pre-existing policies:
 - a. Select the check box next to the policy name in the policy list.
 - b. Click **Reorder**.
 - c. Type the priority number.
 - d. Click **Save Reorder**.
 - 5. Click **Save**.
-

Trend Micro Security for Mac Product Settings

This section contains information on configuring Trend Micro Security for Mac product settings in policy management.

Configuring Cache Settings for Scans

For details about the on-demand scan cache, see [Cache Settings for Scans on page E-132](#).

Procedure

1. Navigate to **Agent Management**.

2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
 3. Click **Settings > Cache Settings for Scans**.
 4. Select **Enable the on-demand scan cache**.
 5. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
 - **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.
 - **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

Cache Settings for Scans

Each time scanning runs, the agent checks the **modified files cache** to see if a file has been modified since the last agent startup.

- If a file has been modified, the agent scans the file and adds it to the **scanned files cache**.
- If a file has not been modified, the agent checks if the file is in the scanned files cache.
 - If the file is in the scanned files cache, the agent skips scanning the file.
 - If the file is not in the scanned files cache, the agent checks the **approved files cache**.



Note

The approved files cache contains files that Trend Micro Security (for Mac) deems trustworthy. Trustworthy files have been scanned by successive versions of the pattern and declared threat-free each time, or threat-free files that have remained unmodified for an extended period of time.

- If the file is in the approved files cache, the agent skips scanning the file.
- If the file is not in the approved files cache, the agent scans the file and adds it to the scanned files cache.

All or some of the caches are cleared whenever the scan engine or pattern is updated.

If scans are run frequently and many files hit the caches, the scanning time reduces significantly.

If scans are seldom run, disable the caches so that files can be checked for threats with each scan.

Configuring Manual Scan Settings

Procedure

1. Navigate to **Agent Management**.
2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
3. Click **Settings > Manual Scan Settings**.
4. Configure the following scan criteria:
 - [Scan Settings on page E-134](#)
 - [CPU Usage on page E-135](#)
5. Click the **Action** tab to configure the scan actions Trend Micro Security (for Mac) performs on detected security risks. For details about scan actions, see [Scan Action Options and Additional Settings on page E-136](#).
6. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
 - **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.

- **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

Scan Settings

Trend Micro Security (for Mac) can scan individual files within compressed files. Trend Micro Security (for Mac) supports the following compression types:

EXTENSION	TYPE
.zip	Archive created by Pkzip
.rar	Archive created by RAR
.tar	Archive created by Tar
.arj	ARJ Compressed archive
.hqx	BINHEX
.gz; .gzip	Gnu ZIP
.Z	LZW/Compressed 16bits
.bin	MacBinary
.cab	Microsoft Cabinet file
Microsoft Compressed/ MSCOMP	
.eml; .mht	MIME
.td0	Teledisk format
.bz2	Unix BZ2 Bzip compressed file
.uu	UUEncode
.ace	WinAce

CPU Usage

Trend Micro Security (for Mac) can pause after scanning one file and before scanning the next file. This setting is used during Manual Scan, Scheduled Scan, and Scan Now.

Select from the following options:

- **High:** No pausing between scans
- **Low:** Pause between file scans

Scan Actions

Specify the action Trend Micro Security (for Mac) performs when a particular scan type detects a security risk.

The action Trend Micro Security (for Mac) performs depends on the scan type that detected the security risk. For example, when Trend Micro Security (for Mac) detects a security risk during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Trend Micro Security (for Mac) can perform against security risks:

SCAN ACTION	DETAILS
Delete	Trend Micro Security (for Mac) removes the infected file from the computer.
Quarantine	Trend Micro Security (for Mac) renames and then moves the infected file to the quarantine directory on the agent computer located in <i><Agent installation folder></i>/common/lib/vsapi/quarantine. Once in the quarantine directory, Trend Micro Security (for Mac) can perform another action on the quarantined file, depending on the action specified by the user. Trend Micro Security (for Mac) can delete, clean, or restore the file. Restoring a file means moving it back to its original location without performing any action. Users may restore the file if it is actually harmless. Cleaning a file means removing the security risk from the quarantined file and then moving it to its original location if cleaning is successful.

SCAN ACTION	DETAILS
Clean	Trend Micro Security (for Mac) removes the security risk from an infected file before allowing users to access it. If the file is uncleanable, Trend Micro Security (for Mac) performs a second action, which can be one of the following actions: Quarantine, Delete, and Pass. To configure the second action, navigate to Agent Management > Settings > {Scan Type} and click the Action tab.
Pass	Trend Micro Security (for Mac) performs no action on the infected file but records the detected security risk in the logs. The file stays where it is located. Trend Micro Security (for Mac) always performs "Pass" on files infected with the Probable Virus/Malware type to mitigate a False Positive. If further analysis confirms that probable virus/malware is indeed a security risk, a new pattern will be released to allow Trend Micro Security (for Mac) to perform the appropriate scan action. If actually harmless, probable virus/malware will no longer be detected. For example: Trend Micro Security (for Mac) detects "x_probable_virus" on a file named "123.pdf" and performs no action at the time of detection. Trend Micro then confirms that "x_probable_virus" is a Trojan horse program and releases a new Virus Pattern version. After loading the new pattern, Trend Micro Security (for Mac) will detect "x_probable_virus" as a Trojan program and, if the action against such programs is "Delete", will delete "123.pdf".

Scan Action Options and Additional Settings

When configuring the scan action, select from the following options:

OPTION	DETAILS
Use ActiveAction	ActiveAction is a set of pre-configured scan actions for different types of security risks. If you are unsure which scan action is suitable for a certain type of security risk, Trend Micro recommends using ActiveAction. ActiveAction settings are constantly updated in the pattern files to protect computers against the latest security risks and the latest methods of attacks.
Use the same action for all security risk types	Select this option if you want the same action performed on all types of security risks, except probable virus/malware. For Probable Virus/Malware, the action is always "Pass". If you choose "Clean" as the first action, select a second action that Trend Micro Security (for Mac) performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable. For details about scan actions, see Scan Actions on page E-135.

Additional Real-time Scan Settings

SETTING	DETAILS
Display a notification message when a security risk is detected	When Trend Micro Security (for Mac) detects a security risk during Real-time Scan, it can display a notification message to inform the user about the detection.

Scheduled Scan Privileges

If Scheduled Scan is enabled on the Mac computer, users can postpone and skip/stop Scheduled Scan.

PRIVILEGE	DETAILS
Postpone Scheduled Scan	Users with the "Postpone Scheduled Scan" privilege can perform the following actions: • Postpone Scheduled Scan before it runs and then specify the postpone duration. Scheduled Scan can only be postponed once. • If Scheduled Scan is in progress, users can stop scanning and restart it later. Users then specify the amount of time that should elapse before scanning restarts. When scanning restarts, all previously scanned files are scanned again. Scheduled Scan can be stopped and then restarted only once. Configure the number of hours and minutes, which corresponds to: • The maximum postpone duration • The maximum amount of time that should elapse before scanning restarts
Skip and Stop Scheduled Scan	This privilege allows users to perform the following actions: • Skip Scheduled Scan before it runs • Stop Scheduled Scan when it is in progress

Additional Scheduled Scan Settings

SETTING	DETAILS
Display a notification before Scheduled Scan runs	When you enable this option, a notification message displays on the Mac computer several minutes before Scheduled Scan runs. Users are notified of the scan schedule (date and time) and their Scheduled Scan privileges, such as postponing, skipping, or stopping Scheduled Scan. Configure the timing for displaying the notification message, in number of minutes.

SETTING	DETAILS
Automatically stop Scheduled Scan when scanning lasts more than __ hours and __ minutes	The agent stops scanning when the specified amount of time is exceeded and scanning is not yet complete. The agent immediately notifies users of any security risk detected during scanning.

Terminology

The following table provides the official terminology used throughout the Trend Micro Security (for Mac) documentation:

TERMINOLOGY	DESCRIPTION
Agent	The Trend Micro Security (for Mac) agent program installed on a Mac computer
Endpoint	The Mac computer where the agent is installed
Agent user (or user)	The person managing the agent on the Mac computer
Server	The Trend Micro Security (for Mac) server program
Server computer	The computer where the Trend Micro Security (for Mac) server is installed
Administrator (or Trend Micro Security (for Mac) administrator)	The person managing the Trend Micro Security (for Mac) server
Console	The user interface for configuring and managing Trend Micro Security (for Mac) server and agent settings The console for the server program is called "web console", while the console for the agent program is called "agent console".
Security risk	The collective term for virus/malware, spyware/grayware, and web threats
Product service	The Trend Micro Security (for Mac) service, which is managed from the Microsoft Management Console (MMC)

TERMINOLOGY	DESCRIPTION
Components	Responsible for scanning, detecting, and taking actions against security risks
Agent installation folder	The folder on the Mac computer that contains the Trend Micro Security (for Mac) agent files <code>/Library/Application Support/TrendMicro</code>
Server installation folder	The folder on the server computer that contains the Trend Micro Security (for Mac) server files. After installing Trend Micro Security (for Mac) server, the folder is created on the same OfficeScan server directory. If you accept the default settings during OfficeScan server installation, you will find the server installation folder at any of the following locations: • <code>C:\Program Files\Trend Micro\OfficeScan\Addon\TMSM</code> • <code>C:\Program Files (x86)\Trend Micro\OfficeScan\Addon\TMSM</code>
Dual-stack	An entity that has both IPv4 and IPv6 addresses. For example: • A dual-stack endpoint is a Mac computer with both IPv4 and IPv6 addresses. • A dual-stack agent refers to an agent installed on a dual-stack endpoint. • A dual-stack proxy server, such as DeleGate, can convert between IPv4 and IPv6 addresses.
Pure IPv4	An entity that only has an IPv4 address
Pure IPv6	An entity that only has an IPv6 address

Configuring Real-time Scan Settings

Procedure

1. Navigate to **Agent Management**.
 2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
 3. Click **Settings > Real-time Scan Settings**.
 4. Configure the following scan criteria:
 - [User Activity on Files on page E-141](#)
 - [Scan Settings on page E-134](#)
 5. Click the **Action** tab to configure the scan actions Trend Micro Security (for Mac) performs on detected security risks. For details about scan actions, see [Scan Action Options and Additional Settings on page E-136](#).
 6. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon (), choose from the following options:
 - **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.
 - **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

User Activity on Files

Choose activities on files that will trigger Real-time Scan. Select from the following options:

- **Scan files being created/modified:** Scans new files introduced into the computer (for example, after downloading a file) or files being modified

- **Scan files being retrieved:** Scans files as they are opened
- **Scan files being created/modified and retrieved**

For example, if the third option is selected, a new file downloaded to the computer will be scanned and stays in its current location if no security risk is detected. The same file will be scanned when a user opens the file and, if the user modified the file, before the modifications are saved.

Scan Settings

Trend Micro Security (for Mac) can scan individual files within compressed files. Trend Micro Security (for Mac) supports the following compression types:

EXTENSION	TYPE
.zip	Archive created by Pkzip
.rar	Archive created by RAR
.tar	Archive created by Tar
.arj	ARJ Compressed archive
.hqx	BINHEX
.gz; .gzip	Gnu ZIP
.Z	LZW/Compressed 16bits
.bin	MacBinary
.cab	Microsoft Cabinet file
Microsoft Compressed/ MSCOMP	
.eml; .mht	MIME
.td0	Teledisk format
.bz2	Unix BZ2 Bzip compressed file
.uu	UUEncode

EXTENSION	TYPE
.ace	WinAce

Scan Actions

Specify the action Trend Micro Security (for Mac) performs when a particular scan type detects a security risk.

The action Trend Micro Security (for Mac) performs depends on the scan type that detected the security risk. For example, when Trend Micro Security (for Mac) detects a security risk during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Trend Micro Security (for Mac) can perform against security risks:

SCAN ACTION	DETAILS
Delete	Trend Micro Security (for Mac) removes the infected file from the computer.
Quarantine	Trend Micro Security (for Mac) renames and then moves the infected file to the quarantine directory on the agent computer located in <Agent installation folder>/common/lib/vsapi/quarantine. Once in the quarantine directory, Trend Micro Security (for Mac) can perform another action on the quarantined file, depending on the action specified by the user. Trend Micro Security (for Mac) can delete, clean, or restore the file. Restoring a file means moving it back to its original location without performing any action. Users may restore the file if it is actually harmless. Cleaning a file means removing the security risk from the quarantined file and then moving it to its original location if cleaning is successful.
Clean	Trend Micro Security (for Mac) removes the security risk from an infected file before allowing users to access it. If the file is uncleanable, Trend Micro Security (for Mac) performs a second action, which can be one of the following actions: Quarantine, Delete, and Pass. To configure the second action, navigate to Agent Management > Settings > {Scan Type} and click the Action tab.

SCAN ACTION	DETAILS
Pass	Trend Micro Security (for Mac) performs no action on the infected file but records the detected security risk in the logs. The file stays where it is located. Trend Micro Security (for Mac) always performs "Pass" on files infected with the Probable Virus/Malware type to mitigate a False Positive. If further analysis confirms that probable virus/malware is indeed a security risk, a new pattern will be released to allow Trend Micro Security (for Mac) to perform the appropriate scan action. If actually harmless, probable virus/malware will no longer be detected. For example: Trend Micro Security (for Mac) detects "x_probable_virus" on a file named "123.pdf" and performs no action at the time of detection. Trend Micro then confirms that "x_probable_virus" is a Trojan horse program and releases a new Virus Pattern version. After loading the new pattern, Trend Micro Security (for Mac) will detect "x_probable_virus" as a Trojan program and, if the action against such programs is "Delete", will delete "123.pdf".

Scan Action Options and Additional Settings

When configuring the scan action, select from the following options:

OPTION	DETAILS
Use ActiveAction	ActiveAction is a set of pre-configured scan actions for different types of security risks. If you are unsure which scan action is suitable for a certain type of security risk, Trend Micro recommends using ActiveAction. ActiveAction settings are constantly updated in the pattern files to protect computers against the latest security risks and the latest methods of attacks.

OPTION	DETAILS
Use the same action for all security risk types	Select this option if you want the same action performed on all types of security risks, except probable virus/malware. For Probable Virus/Malware, the action is always "Pass". If you choose "Clean" as the first action, select a second action that Trend Micro Security (for Mac) performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable. For details about scan actions, see Scan Actions on page E-135.

Additional Real-time Scan Settings

SETTING	DETAILS
Display a notification message when a security risk is detected	When Trend Micro Security (for Mac) detects a security risk during Real-time Scan, it can display a notification message to inform the user about the detection.

Scheduled Scan Privileges

If Scheduled Scan is enabled on the Mac computer, users can postpone and skip/stop Scheduled Scan.

PRIVILEGE	DETAILS
Postpone Scheduled Scan	Users with the "Postpone Scheduled Scan" privilege can perform the following actions: - Postpone Scheduled Scan before it runs and then specify the postpone duration. Scheduled Scan can only be postponed once. - If Scheduled Scan is in progress, users can stop scanning and restart it later. Users then specify the amount of time that should elapse before scanning restarts. When scanning restarts, all previously scanned files are scanned again. Scheduled Scan can be stopped and then restarted only once. Configure the number of hours and minutes, which corresponds to: - The maximum postpone duration - The maximum amount of time that should elapse before scanning restarts
Skip and Stop Scheduled Scan	This privilege allows users to perform the following actions: - Skip Scheduled Scan before it runs - Stop Scheduled Scan when it is in progress

Additional Scheduled Scan Settings

SETTING	DETAILS
Display a notification before Scheduled Scan runs	When you enable this option, a notification message displays on the Mac computer several minutes before Scheduled Scan runs. Users are notified of the scan schedule (date and time) and their Scheduled Scan privileges, such as postponing, skipping, or stopping Scheduled Scan. Configure the timing for displaying the notification message, in number of minutes.

SETTING	DETAILS
Automatically stop Scheduled Scan when scanning lasts more than __ hours and __ minutes	The agent stops scanning when the specified amount of time is exceeded and scanning is not yet complete. The agent immediately notifies users of any security risk detected during scanning.

Terminology

The following table provides the official terminology used throughout the Trend Micro Security (for Mac) documentation:

TERMINOLOGY	DESCRIPTION
Agent	The Trend Micro Security (for Mac) agent program installed on a Mac computer
Endpoint	The Mac computer where the agent is installed
Agent user (or user)	The person managing the agent on the Mac computer
Server	The Trend Micro Security (for Mac) server program
Server computer	The computer where the Trend Micro Security (for Mac) server is installed
Administrator (or Trend Micro Security (for Mac) administrator)	The person managing the Trend Micro Security (for Mac) server
Console	The user interface for configuring and managing Trend Micro Security (for Mac) server and agent settings The console for the server program is called "web console", while the console for the agent program is called "agent console".
Security risk	The collective term for virus/malware, spyware/grayware, and web threats
Product service	The Trend Micro Security (for Mac) service, which is managed from the Microsoft Management Console (MMC)

TERMINOLOGY	DESCRIPTION
Components	Responsible for scanning, detecting, and taking actions against security risks
Agent installation folder	The folder on the Mac computer that contains the Trend Micro Security (for Mac) agent files /Library/Application Support/TrendMicro
Server installation folder	The folder on the server computer that contains the Trend Micro Security (for Mac) server files. After installing Trend Micro Security (for Mac) server, the folder is created on the same OfficeScan server directory. If you accept the default settings during OfficeScan server installation, you will find the server installation folder at any of the following locations: - C:\Program Files\Trend Micro\OfficeScan\Addon\TMSM - C:\Program Files (x86)\Trend Micro\OfficeScan\Addon\TMSM
Dual-stack	An entity that has both IPv4 and IPv6 addresses. For example: - A dual-stack endpoint is a Mac computer with both IPv4 and IPv6 addresses. - A dual-stack agent refers to an agent installed on a dual-stack endpoint. - A dual-stack proxy server, such as DeleGate, can convert between IPv4 and IPv6 addresses.
Pure IPv4	An entity that only has an IPv4 address
Pure IPv6	An entity that only has an IPv6 address

Configuring Scan Exclusion Lists

For details about Scan Exclusion Lists, see [Scan Exclusions on page E-152](#).

Procedure

1. Navigate to **Agent Management**.
2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
3. Click **Settings > Scan Exclusion Settings**.
4. Select the check box to enable scan exclusion.
5. To configure the **Scan Exclusion List (Files)**:
 - a. Type a full file path or directory path and click **Add**.

Reminders:

- It is not possible to type only a file name.
- You can specify a maximum of 64 paths. See the following table for examples.

PATH	DETAILS	EXAMPLES
Full file path	Excludes a specific file on the computer	• Example 1: <code>/file.log</code> • Example 2: <code>/System/file.log</code>

PATH	DETAILS	EXAMPLES
Directory path	Excludes all files located on a specific folder and all its subfolders	• Example 1: <code>/System/</code> Examples of files excluded from scans: • <code>/System/file.log</code> • <code>/System/Library/file.log</code> Examples of files that will be scanned: • <code>/Applications/file.log</code> • Example 2: <code>/System/Library</code> Examples of files excluded from scans: • <code>/System/Library/file.log</code> • <code>/System/Library/Filters/file.log</code> Examples of files that will be scanned: • <code>/System/file.log</code>

- Use the asterisk wildcard (*) in place of folder names.

See the following table for examples.

PATH	WILDCARD USAGE EXAMPLES
Full file path	<code>/Users/Mac/*/file.log</code> Examples of files excluded from scans: • <code>/Users/Mac/Desktop/file.log</code> • <code>/Users/Mac/Movies/file.log</code> Examples of files that will be scanned: • <code>/Users/file.log</code> • <code>/Users/Mac/file.log</code>
Directory path	• Example 1: <code>/Users/Mac/*</code> Examples of files excluded from scans: • <code>/Users/Mac/doc.html</code> • <code>/Users/Mac/Documents/doc.html</code> • <code>/Users/Mac/Documents/Pics/pic.jpg</code> Examples of files that will be scanned: • <code>/Users/doc.html</code> • Example 2: <code>/*/Components</code> Examples of files excluded from scans: • <code>/Users/Components/file.log</code> • <code>/System/Components/file.log</code> Examples of files that will be scanned: • <code>/file.log</code> • <code>/Users/file.log</code> • <code>/System/Files/file.log</code>

- Partial matching of folder names is not supported. For example, it is not possible to type `/Users/*user/temp` to exclude files on folder names ending in `user`, such as `end_user` or `new_user`.
 - b. To delete a path, select it and click **Remove**.
6. To configure the **Scan Exclusion List (File Extensions)**:
- a. Type a file extension without a period (.) and click **Add**. For example, type `pdf`. You can specify a maximum of 64 file extensions.
 - b. To delete a file extension, select it and click **Remove**.
7. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
- **Apply to All Agents**: Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.
 - **Apply to Future Groups Only**: Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

Scan Exclusions

Configure scan exclusions to increase the scanning performance and skip scanning files that are known to be harmless. When a particular scan type runs, Trend Micro Security (for Mac) checks the scan exclusion list to determine which files on the computer will be excluded from scanning.

SCAN EXCLUSION LIST	DETAILS
Files	Trend Micro Security (for Mac) will not scan a file if: - The file is located under the directory path specified in the scan exclusion list - The file matches the full file path (directory path and file name) specified in the scan exclusion list
File extensions	Trend Micro Security (for Mac) will not scan a file if its file extension matches any of the extensions included in this exclusion list.

Configuring Scheduled Scan Settings

Procedure

1. Navigate to **Agent Management**.
2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
3. Click **Settings > Scheduled Scan Settings**.
4. Select the check box to enable Scheduled Scan.
5. Configure the following scan criteria:
 - [Schedule on page E-154](#)
 - [Scan Target on page E-154](#)
 - [Scan Settings on page E-134](#)
 - [CPU Usage on page E-135](#)
6. Click the **Action** tab to configure the scan actions Trend Micro Security (for Mac) performs on detected security risks. For details about scan actions, see [Scan Action Options and Additional Settings on page E-136](#).

7. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
- **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.
 - **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

Schedule

Configure how often (daily, weekly, or monthly) and what time Scheduled Scan will run.

For monthly Scheduled Scans, if you selected the 29th, 30th, or 31st day and a month does not have this day, Trend Micro Security (for Mac) runs Scheduled Scan on the last day of the month.

Scan Target

Select from the following options:

- **All scannable files:** Scan all files
- **File types scanned by IntelliScan:** Only scan files known to potentially harbor malicious code, including files disguised by a harmless extension name.
- **File or folder name with full path:** Only scan the specified file or files found in a specific folder.
 1. Type a full file path or directory path and then click **Add**.
 - Full file path example: `/Users/username/temp.zip`
 - Directory path example: `/Users/username`
 2. To delete a directory path or full file path, select it and then click **Remove**.

IntelliScan

IntelliScan is a method of identifying files to scan. For executable files (for example, .exe), the true file type is determined based on the file content. For non-executable files (for example, .txt), the true file type is determined based on the file header.

Using IntelliScan provides the following benefits:

- Performance optimization: IntelliScan does not affect applications on the endpoint because it uses minimal system resources.
- Shorter scanning period: Because IntelliScan uses true file type identification, it only scans files that are vulnerable to infection. The scan time is therefore significantly shorter than when you scan all files.

Scan Settings

Trend Micro Security (for Mac) can scan individual files within compressed files. Trend Micro Security (for Mac) supports the following compression types:

EXTENSION	TYPE
.zip	Archive created by Pkzip
.rar	Archive created by RAR
.tar	Archive created by Tar
.arj	ARJ Compressed archive
.hqx	BINHEX
.gz; .gzip	Gnu ZIP
.Z	LZW/Compressed 16bits
.bin	MacBinary
.cab	Microsoft Cabinet file
Microsoft Compressed/ MSCOMP	

EXTENSION	TYPE
.eml; .mht	MIME
.td0	Teledisk format
.bz2	Unix BZ2 Bzip compressed file
.uu	UUEncode
.ace	WinAce

CPU Usage

Trend Micro Security (for Mac) can pause after scanning one file and before scanning the next file. This setting is used during Manual Scan, Scheduled Scan, and Scan Now.

Select from the following options:

- **High:** No pausing between scans
- **Low:** Pause between file scans

Scan Actions

Specify the action Trend Micro Security (for Mac) performs when a particular scan type detects a security risk.

The action Trend Micro Security (for Mac) performs depends on the scan type that detected the security risk. For example, when Trend Micro Security (for Mac) detects a security risk during Manual Scan (scan type), it cleans (action) the infected file.

The following are the actions Trend Micro Security (for Mac) can perform against security risks:

SCAN ACTION	DETAILS
Delete	Trend Micro Security (for Mac) removes the infected file from the computer.

SCAN ACTION	DETAILS
Quarantine	Trend Micro Security (for Mac) renames and then moves the infected file to the quarantine directory on the agent computer located in <Agent installation folder>/common/lib/vsapi/quarantine. Once in the quarantine directory, Trend Micro Security (for Mac) can perform another action on the quarantined file, depending on the action specified by the user. Trend Micro Security (for Mac) can delete, clean, or restore the file. Restoring a file means moving it back to its original location without performing any action. Users may restore the file if it is actually harmless. Cleaning a file means removing the security risk from the quarantined file and then moving it to its original location if cleaning is successful.
Clean	Trend Micro Security (for Mac) removes the security risk from an infected file before allowing users to access it. If the file is uncleanable, Trend Micro Security (for Mac) performs a second action, which can be one of the following actions: Quarantine, Delete, and Pass. To configure the second action, navigate to Agent Management > Settings > {Scan Type} and click the Action tab.
Pass	Trend Micro Security (for Mac) performs no action on the infected file but records the detected security risk in the logs. The file stays where it is located. Trend Micro Security (for Mac) always performs "Pass" on files infected with the Probable Virus/Malware type to mitigate a False Positive. If further analysis confirms that probable virus/malware is indeed a security risk, a new pattern will be released to allow Trend Micro Security (for Mac) to perform the appropriate scan action. If actually harmless, probable virus/malware will no longer be detected. For example: Trend Micro Security (for Mac) detects "x_probable_virus" on a file named "123.pdf" and performs no action at the time of detection. Trend Micro then confirms that "x_probable_virus" is a Trojan horse program and releases a new Virus Pattern version. After loading the new pattern, Trend Micro Security (for Mac) will detect "x_probable_virus" as a Trojan program and, if the action against such programs is "Delete", will delete "123.pdf".

Scan Action Options and Additional Settings

When configuring the scan action, select from the following options:

OPTION	DETAILS
Use ActiveAction	ActiveAction is a set of pre-configured scan actions for different types of security risks. If you are unsure which scan action is suitable for a certain type of security risk, Trend Micro recommends using ActiveAction. ActiveAction settings are constantly updated in the pattern files to protect computers against the latest security risks and the latest methods of attacks.
Use the same action for all security risk types	Select this option if you want the same action performed on all types of security risks, except probable virus/malware. For Probable Virus/Malware, the action is always "Pass". If you choose "Clean" as the first action, select a second action that Trend Micro Security (for Mac) performs if cleaning is unsuccessful. If the first action is not "Clean", no second action is configurable. For details about scan actions, see Scan Actions on page E-135.

Additional Real-time Scan Settings

SETTING	DETAILS
Display a notification message when a security risk is detected	When Trend Micro Security (for Mac) detects a security risk during Real-time Scan, it can display a notification message to inform the user about the detection.

Scheduled Scan Privileges

If Scheduled Scan is enabled on the Mac computer, users can postpone and skip/stop Scheduled Scan.

PRIVILEGE	DETAILS
Postpone Scheduled Scan	Users with the "Postpone Scheduled Scan" privilege can perform the following actions: - Postpone Scheduled Scan before it runs and then specify the postpone duration. Scheduled Scan can only be postponed once. - If Scheduled Scan is in progress, users can stop scanning and restart it later. Users then specify the amount of time that should elapse before scanning restarts. When scanning restarts, all previously scanned files are scanned again. Scheduled Scan can be stopped and then restarted only once. Configure the number of hours and minutes, which corresponds to: - The maximum postpone duration - The maximum amount of time that should elapse before scanning restarts
Skip and Stop Scheduled Scan	This privilege allows users to perform the following actions: - Skip Scheduled Scan before it runs - Stop Scheduled Scan when it is in progress

Additional Scheduled Scan Settings

SETTING	DETAILS
Display a notification before Scheduled Scan runs	When you enable this option, a notification message displays on the Mac computer several minutes before Scheduled Scan runs. Users are notified of the scan schedule (date and time) and their Scheduled Scan privileges, such as postponing, skipping, or stopping Scheduled Scan. Configure the timing for displaying the notification message, in number of minutes.

SETTING	DETAILS
Automatically stop Scheduled Scan when scanning lasts more than __ hours and __ minutes	The agent stops scanning when the specified amount of time is exceeded and scanning is not yet complete. The agent immediately notifies users of any security risk detected during scanning.

Terminology

The following table provides the official terminology used throughout the Trend Micro Security (for Mac) documentation:

TERMINOLOGY	DESCRIPTION
Agent	The Trend Micro Security (for Mac) agent program installed on a Mac computer
Endpoint	The Mac computer where the agent is installed
Agent user (or user)	The person managing the agent on the Mac computer
Server	The Trend Micro Security (for Mac) server program
Server computer	The computer where the Trend Micro Security (for Mac) server is installed
Administrator (or Trend Micro Security (for Mac) administrator)	The person managing the Trend Micro Security (for Mac) server
Console	The user interface for configuring and managing Trend Micro Security (for Mac) server and agent settings The console for the server program is called "web console", while the console for the agent program is called "agent console".
Security risk	The collective term for virus/malware, spyware/grayware, and web threats
Product service	The Trend Micro Security (for Mac) service, which is managed from the Microsoft Management Console (MMC)

TERMINOLOGY	DESCRIPTION
Components	Responsible for scanning, detecting, and taking actions against security risks
Agent installation folder	The folder on the Mac computer that contains the Trend Micro Security (for Mac) agent files /Library/Application Support/TrendMicro
Server installation folder	The folder on the server computer that contains the Trend Micro Security (for Mac) server files. After installing Trend Micro Security (for Mac) server, the folder is created on the same OfficeScan server directory. If you accept the default settings during OfficeScan server installation, you will find the server installation folder at any of the following locations: - C:\Program Files\Trend Micro\OfficeScan\Addon\TMSM - C:\Program Files (x86)\Trend Micro\OfficeScan\Addon\TMSM
Dual-stack	An entity that has both IPv4 and IPv6 addresses. For example: - A dual-stack endpoint is a Mac computer with both IPv4 and IPv6 addresses. - A dual-stack agent refers to an agent installed on a dual-stack endpoint. - A dual-stack proxy server, such as DeleGate, can convert between IPv4 and IPv6 addresses.
Pure IPv4	An entity that only has an IPv4 address
Pure IPv6	An entity that only has an IPv6 address

Configuring Agent Update Settings

For a detailed explanation of agent updates, see [Agent Updates on page E-163](#).

Procedure

1. Navigate to **Agent Management**.
2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
3. Click **Settings > Update Settings**.
4. Select the check box to allow agents to download updates from the Trend Micro ActiveUpdate server.



Note

If an agent only has an IPv6 address, read the IPv6 limitations for agent updates in [Pure IPv6 Agent Limitations on page E-165](#).

5. Configure scheduled updates.
 - a. Select **Enable scheduled update**.
 - b. Configure the schedule.
 - c. If you select **Daily** or **Weekly**, specify the time of the update and the time period the Trend Micro Security (for Mac) server will notify agents to update components. For example, if the start time is 12pm and the time period is 2 hours, the server randomly notifies all online agents to update components from 12pm until 2pm. This setting prevents all online agents from simultaneously connecting to the server at the specified start time, significantly reducing the amount of traffic directed to the server.
6. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
 - **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.

- **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.

Agent Updates

To ensure that agents stay protected from the latest security risks, update agent components regularly. Also update agents with severely out-of-date components and whenever there is an outbreak. Components become severely out-of-date when the agent is unable to update from the Trend Micro Security (for Mac) server or the ActiveUpdate server for an extended period of time.

Agent Update Methods

There are several ways to update agents.

UPDATE METHOD	DESCRIPTION
Administrator-initiated manual update	Initiate an update from the following web console screens: • Agent Management screen. For details, see Launching Agent Update from the Agent Management Screen on page E-164. • Summary screen. For details, see Launching Agent Update from the Summary Screen on page E-165.
Automatic update	• After the server finishes an update, it immediately notifies agents to update. • Updates can run according to the schedule that you configured. You can configure a schedule that applies to one or several agents and domains, or to all the agents that the server manages. For details, see Configuring Agent Update Settings on page E-161.
User-initiated manual update	Users launch the update from their Mac computers.

Agent Update Source

By default, agents download components from the Trend Micro Security (for Mac) server. In addition to components, Trend Micro Security (for Mac) agents also receive

updated configuration files when updating from the Trend Micro Security (for Mac) server. Agents need the configuration files to apply new settings. Each time you modify Trend Micro Security (for Mac) settings on the web console, the configuration files change.

Before updating the agents, check if the Trend Micro Security (for Mac) server has the latest components. For information on how to update the Trend Micro Security (for Mac) server, see [Server Update on page E-166](#).

Configure one, several, or all agents to download from the Trend Micro ActiveUpdate server if the Trend Micro Security (for Mac) server is unavailable. For details, see [Configuring Agent Update Settings on page E-161](#).

**Note**

If an agent only has an IPv6 address, read the IPv6 limitations for agent updates in [Pure IPv6 Agent Limitations on page E-165](#).

Agent Update Notes and Reminders

- Trend Micro Security (for Mac) agents can use proxy settings during an update. Proxy settings are configured on the agent console.
- During an update, the Trend Micro Security (for Mac) icon on the menu bar of the Mac computer indicates that the product is updating. If an upgrade to the agent program is available, agents update and then upgrade to the latest program version or build. Users cannot run any task from the console until the update is complete.
- Access the Summary screen to check if all agents have been updated.

Launching Agent Update from the Agent Management Screen

For other agent update methods, see [Agent Updates on page E-163](#).

Procedure

1. Click **Tasks > Update**.

Agents that receive the notification start to update. On Mac computers, the Trend Micro Security (for Mac) icon on the menu bar indicates that the product is updating. Users cannot run any task from the console until the update is complete.

Launching Agent Update from the Summary Screen

For other agent update methods, see [Agent Updates on page E-163](#).

Procedure

1. Click **Summary** in the main menu.
2. Go to the **Update Status** section and click the link under the **Outdated** column.
The agent tree opens, showing all the agents that require an update.
3. Select the agents that you want to update.
4. Click **Tasks > Update**.

Agents that receive the notification start to update. On Mac computers, the Trend Micro Security (for Mac) icon on the menu bar indicates that the product is updating. Users cannot run any task from the console until the update is complete.

Pure IPv6 Agent Limitations

The following table lists the limitations when agents only have an IPv6 address.

TABLE E-39. Pure IPv6 Agent Limitations

ITEM	LIMITATION
Parent server	Pure IPv6 agents cannot be managed by a pure IPv4 server.
Updates	A pure IPv6 agent cannot update from pure IPv4 update sources, such as: • Trend Micro ActiveUpdate Server • A pure IPv4 Trend Micro Security (for Mac) server

ITEM	LIMITATION
Web Reputation queries	A pure IPv6 agent cannot send Web Reputation queries to Trend Micro Smart Protection Network.
Proxy connection	A pure IPv6 agent cannot connect through a pure IPv4 proxy server.
Agent deployment	Apple Remote Desktop is unable to deploy the agent to pure IPv6 computers because these computers always appear as offline.

Most of these limitations can be overcome by setting up a dual-stack proxy server that can convert between IPv4 and IPv6 addresses (such as DeleGate). Position the proxy server between the agents and the entities to which they connect.

Server Update

The Trend Micro Security (for Mac) server downloads the following components and deploys them to agents:

- Virus Pattern
- Spyware Active-monitoring Pattern
- Virus Scan Engine

View the current versions of components on the web console's Summary screen, and determine the number of agents with updated and outdated components.

If you use a proxy server to connect to the Internet, use the correct proxy settings to download updates successfully.

Configuring Web Reputation Settings

Web Reputation settings include policies that dictate whether Trend Micro Security (for Mac) will block or allow access to a website. To determine the appropriate policy to use, Trend Micro Security (for Mac) checks the agent's location. An agent's location is "internal" if it can connect to the Trend Micro Security (for Mac) server. Otherwise, an agent's location is "external".

Procedure

1. Navigate to **Agent Management**.
2. In the agent tree, click the root icon () to include all agents or select specific groups or agents.
3. Click **Settings > Web Reputation Settings**.
4. To configure a policy for external agents:
 - a. Click the **External Agents** tab.
 - b. Select **Enable Web reputation policy**.

When the policy is enabled, external agents send web reputation queries to the Smart Protection Network.



Note

If an agent only has an IPv6 address, read the IPv6 limitations for Web Reputation queries in [Pure IPv6 Agent Limitations on page E-165](#).

- c. Select from the available web reputation security levels: **High, Medium** or **Low**



Note

The security levels determine whether Trend Micro Security (for Mac) will allow or block access to a URL. For example, if you set the security level to Low, Trend Micro Security (for Mac) only blocks URLs that are known to be web threats. As you set the security level higher, the web threat detection rate improves but the possibility of false positives also increases.

- d. To submit web reputation feedback, click the URL provided. The Trend Micro Web Reputation Query system opens in a browser window.
5. To configure a policy for internal agents:
 - a. Click the **Internal Agents** tab.
 - b. Select **Enable Web reputation policy**.

When the policy is enabled, internal agents send web reputation queries to:

- Smart Protection Servers if the **Send queries to Smart Protection Servers** option is enabled.
- Smart Protection Network if the **Send queries to Smart Protection Servers** option is disabled.

**Note**

If an agent only has an IPv6 address, read the IPv6 limitations for Web Reputation queries in *Pure IPv6 Agent Limitations on page E-165*.

- c. Select **Send queries to Smart Protection Servers** if you want internal agents to send web reputation queries to Smart Protection Servers.
- If you enable this option, agents refer to the same smart protection source list used by OfficeScan agents to determine the Smart Protection Servers to which they send queries.

**Important**

Before enabling this option, read the guidelines in *Trend Micro Smart Protection on page E-169*.

- If you disable this option, agents send web reputation queries to Smart Protection Network. Mac computers must have Internet connection to send queries successfully.
- d. Select from the available web reputation security levels: **High**, **Medium** or **Low**

**Note**

The security levels determine whether Trend Micro Security (for Mac) will allow or block access to a URL. For example, if you set the security level to Low, Trend Micro Security (for Mac) only blocks URLs that are known to be web threats. As you set the security level higher, the web threat detection rate improves but the possibility of false positives also increases.

Agents do not block untested websites, regardless of the security level.

- e. To submit web reputation feedback, click the URL provided. The Trend Micro Web Reputation Query system opens in a browser window.
 - f. Select whether to allow the agents to send web reputation logs to the server. Allow agents to send logs if you want to analyze URLs being blocked by Trend Micro Security (for Mac) and take the appropriate action on URLs you think are safe to access.
6. If you selected group(s) or agent(s) on the agent tree, click **Save** to apply settings to the group(s) or agent(s). If you selected the root icon () , choose from the following options:
- **Apply to All Agents:** Applies settings to all existing agents and to any new agent added to an existing/future group. Future groups are groups not yet created at the time you configure the settings.
 - **Apply to Future Groups Only:** Applies settings only to agents added to future groups. This option will not apply settings to new agents added to an existing group.
-

Trend Micro Smart Protection

Trend Micro smart protection is a next-generation cloud-client content security infrastructure designed to protect customers from security risks and web threats. It powers both local and hosted solutions to protect users whether they are on the network, at home, or on the go, using light-weight clients to access its unique in-the-cloud correlation of email, web and file reputation technologies, as well as threat databases. Customers' protection is automatically updated and strengthened as more products, services, and users access the network, creating a real-time neighborhood watch protection service for its users.

Smart Protection Services

Smart protection services include File Reputation Services, Web Reputation Services, and Smart Feedback.

In this release, Trend Micro Security (for Mac) agents use [Web Reputation Services on page E-172](#) to determine the safety of websites accessed on the Mac computer.

Smart Protection Sources

Web Reputation Services are delivered through **smart protection sources**, namely, **Trend Micro Smart Protection Network** and **Smart Protection Servers**.

Trend Micro Smart Protection Network is a globally scaled, Internet-based, infrastructure and is intended for users who do not have immediate access to their corporate network.

Smart Protection Servers are for users who have access to their local corporate network. Local servers localize smart protection services to the corporate network to optimize efficiency.

Smart Protection Source for External Agents

External agents, which are agents that are unable to maintain a functional connection with the Trend Micro Security (for Mac) server, send Web Reputation queries to Smart Protection Network. Internet connection is required to send queries successfully.

Go to the Web Reputation Services screen and enable Web Reputation policy for external agents. For the detailed steps, see [Configuring Web Reputation Settings on page E-166](#).

Smart Protection Sources for Internal Agents

Internal agents, which are agents that maintain a functional connection with the Trend Micro Security (for Mac) server, can send queries to either Smart Protection Server or Smart Protection Network.

SOURCE	DETAILS
Smart Protection Servers	Configure Smart Protection Servers as source if you have privacy concerns and want to keep Web Reputation queries within the corporate network.
Smart Protection Network	Configure Smart Protection Network as source if you do not have the resources required to set up and maintain Smart Protection Servers.

Smart Protection Servers as Source for Internal Agents

With this option, Trend Micro Security (for Mac) agents send queries to Smart Protection Servers configured for OfficeScan clients.

This option is only available if the OfficeScan version is 10.5 or later. OfficeScan 10, which is supported in this Trend Micro Security (for Mac) release, is not compatible with Smart Protection Servers that deliver Web Reputation Services.

If your Trend Micro Security (for Mac) server is installed with OfficeScan 10, upgrade OfficeScan to version 10.5 or later. If it is not possible to upgrade OfficeScan, choose Smart Protection Network as source.

If your OfficeScan version is 10.5 or later, read the following guidelines to allow agents to send queries to Smart Protection Servers successfully:

1. Set up the smart protection environment, if you have not done so. For instructions and guidelines on setting up the environment, refer to the following documentation:
 - For OfficeScan 10.5, see Chapter 3 of the documentation, which is downloadable at:
http://docs.trendmicro.com/all/ent/officescan/v10.5/en-us/osce_10.5_gsg.pdf
 - For OfficeScan 10.6, visit the following web page:
http://docs.trendmicro.com/all/ent/officescan/v10.6/en-us/osce_10.6_olhsrv/ohelp/smart/stusmps.htm
2. On the web console for Trend Micro Security (for Mac) server, go to the Web Reputation Settings screen and enable the option **Send queries to Smart Protection Servers**. For the detailed steps, see *Configuring Web Reputation Settings on page E-166*.



Important

3. Be sure that Smart Protection Servers are available. If all Smart Protection Servers are unavailable, agents do not send queries to Smart Protection Network, leaving computers vulnerable to threats.
4. Be sure to update Smart Protection Servers regularly so that protection remains current.

Smart Protection Network as Source for Internal Agents

Internet connection is required to send queries to Smart Protection Network successfully.

To configure Smart Protection Network as source for internal agents, go to the Web Reputation Services screen and enable Web Reputation policy for internal agents. Be sure not to select the option **Send queries to Smart Protection Servers**. For the detailed steps, see *Configuring Web Reputation Settings on page E-166*.

Web Reputation

Trend Micro Security (for Mac) leverages Trend Micro's extensive web security databases to check the reputation of websites that users are attempting to access. The website's reputation is correlated with the specific web reputation policy enforced on the computer. Depending on the policy in use, Trend Micro Security (for Mac) will either block or allow access to the website. Policies are enforced based on the agent's location.

Configuring the Approved URL List

Approved URLs bypass Web Reputation policies. Trend Micro Security (for Mac) does not block these URLs even if the Web Reputation policy is set to block them. Add URLs that you consider safe to the approved URL list.

Procedure

1. Navigate to **Administration > Web Reputation Approved URL List**.
2. Specify a URL in the text box. You can add a wildcard character (*) anywhere on the URL.

Examples:

- `www.trendmicro.com/*` means that all pages on the www.trendmicro.com domain will be approved.
- `*.trendmicro.com/*` means that all pages on any sub-domain of trendmicro.com will be approved.

You can type URLs containing IP addresses. If a URL contains an IPv6 address, enclose the address in square brackets.

3. Click **Add**.
 4. To delete an entry, click the icon next to an approved URL.
 5. Click **Save**.
-

Pure IPv6 Agent Limitations

The following table lists the limitations when agents only have an IPv6 address.

TABLE E-40. Pure IPv6 Agent Limitations

ITEM	LIMITATION
Parent server	Pure IPv6 agents cannot be managed by a pure IPv4 server.
Updates	A pure IPv6 agent cannot update from pure IPv4 update sources, such as: • Trend Micro ActiveUpdate Server • A pure IPv4 Trend Micro Security (for Mac) server
Web Reputation queries	A pure IPv6 agent cannot send Web Reputation queries to Trend Micro Smart Protection Network.
Proxy connection	A pure IPv6 agent cannot connect through a pure IPv4 proxy server.
Agent deployment	Apple Remote Desktop is unable to deploy the agent to pure IPv6 computers because these computers always appear as offline.

Most of these limitations can be overcome by setting up a dual-stack proxy server that can convert between IPv4 and IPv6 addresses (such as DeleGate). Position the proxy server between the agents and the entities to which they connect.

Endpoint Encryption Product Settings

This section contains information on configuring Endpoint Encryption settings for policy management.

Creating a Policy

The following procedure explain how to configure a Control Manager policy that affects Endpoint Encryption users and devices.



Important

To add a user account to the policy, make sure that the user account already exists.



Note

For information about available policy settings, see [Endpoint Encryption Policy Settings on page E-180](#).

For information about adding new Endpoint Encryption users, see [Adding Users to Endpoint Encryption on page E-176](#).

For information about configuring Active Directory, see the *Endpoint Encryption Installation and Migration Guide*.

For information about policy mapping between Control Manager and PolicyServer MMC, see [Policy Mapping Between Management Consoles on page E-176](#).

Procedure

1. Go to **Policies > Policy Management**.
2. From the **Product** drop-down list, select **Endpoint Encryption**.
3. Click **Create**.

The **Create Policy** screen appears.

TREND MICRO Control Manager™ Logged on as: root | [Log off](#) | [Help](#)

★ Dashboard Products Policies Logs Reports Updates Administration

Create Policy
[Policy Management](#) > Create Policy [Help](#)

Policy Name:

Targets:

- ☒ None (Draft only)
- ☐ Filter by Criteria [Set Filter](#)
- ☐ Specify Target(s) [Select](#)

Endpoint Encryption Settings [Show Permissions](#)

- ▼ User
- ▼ Full Disk Encryption
- ▼ File Encryption
- ▼ Common

[Save](#) [Cancel](#)

4. Specify a policy name.
5. Select one of the following policy target options:
 - **None (Draft Only):** Create a policy with no targets (endpoints)
 - **Filter by Criteria:** Endpoint Encryption does not support filtering by criteria
 - **Specify Target(s):** Specify existing endpoints.

**Note**

For more information about policy targets, see [Specifying Policy Targets on page E-180](#)

6. Specify Endpoint Encryption policy settings.
 - Configure **User** policies.
 See [Configuring Endpoint Encryption Users Rules on page E-182](#).
 - Configure **Full Disk Encryption** policies.
 See [Configuring Full Disk Encryption Rules on page E-183](#).
 - Configure **File Encryption** policies.

See [Configuring File Encryption Rules on page E-185](#).

- Configure **Common** policies.

See [Configuring Common Policy Rules on page E-188](#).

7. Click **Save**.
-

PolicyServer Active Directory Synchronization

PolicyServer supports Active Directory (AD) synchronization for a configured PolicyServer group. Synchronization will automatically add and remove AD users from configured PolicyServer groups.

Adding Users to Endpoint Encryption

Endpoint Encryption has several options to add users to Endpoint Encryption:

- Add users manually, one at a time
- Bulk import numerous users with a CSV file
- Use the External Directory Browser with Active Directory

Policy Mapping Between Management Consoles

Administrators may manage Endpoint Encryption using only PolicyServer MMC or manage Endpoint Encryption using Control Manager for policy, user and device management and PolicyServer MMC for advanced log management and reporting.

The following tables explain how policies are mapped between PolicyServer MMC and Control Manager. For environments using Control Manager to manage PolicyServer, use PolicyServer MMC to control any policy not listed in the table.

TABLE E-41. Full Disk Encryption Policy Mapping

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Encryption	

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Encrypt endpoint	Full Disk Encryption > Encryption > Encrypt Device
Client Settings	
Bypass Full Disk Encryption preboot	Full Disk Encryption > Login > Preboot Bypass
Users are allowed to access system recovery tools on the device	Full Disk Encryption > Agent > Allow User Recovery
Notifications	
If the endpoint is found, display the following message	Full Disk Encryption > Login > If Found
Display Technical Support contact information	Full Disk Encryption > Login > Support Info
Show legal notice	Full Disk Encryption > Login > Legal Notice
• Show legal notice > Installation • Show legal notice > Startup	Full Disk Encryption > Login > Legal Notice > Legal Notice > Legal Notice Display Time
Show legal notice	Full Disk Encryption > Login > Legal Notice > Legal Notice > Legal Notice Text

TABLE E-42. File Encryption Policy Mapping

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Folders to Encrypt	
Folders to Encrypt text box	File Encryption > Encryption > Specify Folders to Encrypt
Encryption Key Used	

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Encryption Key Used	File Encryption > Encryption > Encryption Key Used
Storage Devices	
Disable optical drives	File Encryption > Encryption > Disable Optical Drive
Disable USB drives	File Encryption > Encryption > Removable Media > Disable USB Drive
Encrypt all files and folders on USB drives	File Encryption > Encryption > Removable Media > Fully Encrypt Device
Specify the file path to encrypt on USB devices	File Encryption > Encryption > Removable Media > Folders to Encrypt On Removable Media
Notifications	
Show legal notice	File Encryption > Login > Legal Notice
- Show legal notice > Installation - Show legal notice > Startup	File Encryption > Login > Legal Notice > Legal Notice Display Time
Show legal notice text box	File Encryption > Login > Legal Notice > Legal Notice Text

TABLE E-43. Common Policy Mapping

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Allow User to Uninstall	
Allow non-administrator accounts to uninstall agent software	- Full Disk Encryption > Agent > Allow User to Uninstall - File Encryption > Agent > Allow User to Uninstall
Lockout and Lock Device Actions	

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Lock account after <i><number></i> days	Full Disk Encryption > Login > Account Lockout Period
Account lockout action	Full Disk Encryption > Login > Account Lockout Action
Failed logon attempts allowed	Full Disk Encryption > Login > Failed Login Attempts Allowed
Full Disk Encryption: Device locked action	Full Disk Encryption > Login > Device Locked Action
Full Disk Encryption: Number of minutes to lock device	Full Disk Encryption > Login > Lock Device Time Delay
File Encryption: Device locked action	File Encryption > Login > Device Locked Action
File Encryption: Number of minutes to lock device	File Encryption > Login > Lock Device Time Delay
Password	
User must change password after <i><number></i> days	Common > Authentication > Local Login > User Password > Change Password Every
User cannot reuse the previous <i><number></i> passwords	Common > Authentication > Local Login > User Password > Password History Retention
Number of consecutive characters allowed in a password	Common > Authentication > Local Login > User Password > Consecutive Characters Allowed
Minimum length allowed for passwords	Common > Authentication > Local Login > User Password > Minimum Length
Password Character Requirements	

CONTROL MANAGER LABEL	POLICYSERVER MMC PATH
Letters	Common > Authentication > Local Login > User Password > Require How Many Characters
Lowercase characters	Common > Authentication > Local Login > User Password > Require How Many Lower Case Characters
Uppercase characters	Common > Authentication > Local Login > User Password > Require How Many Upper Case Characters
Numbers	Common > Authentication > Local Login > User Password > Require How Many Numbers
Symbols	Common > Authentication > Local Login > User Password > Require How Many Special Characters

Endpoint Encryption Policy Settings

Specifying Policy Targets

Use the **Specify Target(s)** screen to assign Endpoint Encryption devices to the policy.

**Note**

The **Specify Target(s)** screen is available when creating a new policy. For information about creating a policy, see [Creating a Policy on page E-174](#).

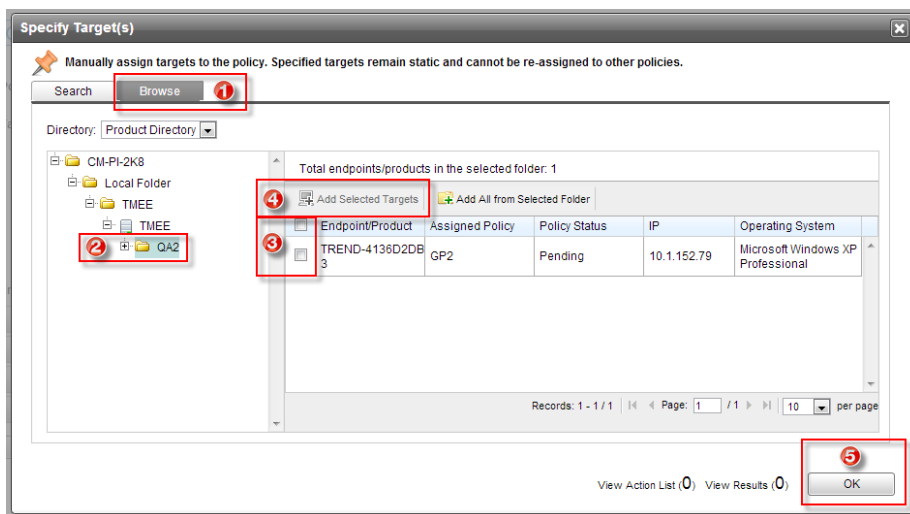


FIGURE E-1. Specifying Policy Targets

Procedure

1. From the **Specify Target(s)** screen, click the **Browse** tab.
2. From the left pane, expand the tree to select the managed folder.
 Example: **CM-PI-2K8 > Local Folder > TMEE > TMEE > QA2**
3. Select any appropriate Endpoint Encryption devices, or select the top check box to select all Endpoint Encryption devices listed on the current page.
4. Click **Add Selected Targets**.



Note

To immediately select all devices in the managed folder, click **Add All from Selected Folder**.

“View Action List” and “View Results” update based on the selection.

5. Click **OK**.

Configuring Endpoint Encryption Users Rules

The following procedure explains the configurable options for policy rules affecting authentication and Endpoint Encryption user accounts.

Procedure

1. Create a new Endpoint Encryption policy.

See *Creating a Policy on page E-174*.

2. Click **Users**.

The **Users** policy rules settings appear.

The screenshot shows a window titled 'Users' with two main sections: 'Domain User Settings' and 'User Management'.

Domain User Settings

- ☐ Enable domain authentication
- Specify the server information for Active Directory.
- Domain name :
- Host name :
- Distinguished name : Optional
- Server type :

User Management

- ☐ All Endpoint Encryption users
- ☒ Select specific users ⓘ

Buttons:

☐	User Name	First Name	Last Name	Role	Authentication Method
☒	user1	1	1	User	None

FIGURE E-2. Endpoint Encryption Users Policy Rules

3. Under **Domain User Settings**, select **Enable domain authentication** to specify whether users require domain authentication.

**Important**

Active Directory (AD) synchronization requires PolicyServer to have three enabled components:

- a. Configure the AD domain.
- b. Configure the policy group to point to the proper Organizational Unit (OU).
- c. Configure the policy group with appropriate credentials to access the AD domain that matches the policy group's "Distinguished Name".

To configure domain authentication, see *PolicyServer Active Directory Synchronization* in the *Endpoint Encryption Installation and Migration Guide*.

4. Under **User Management**, configure user access.

- Select **All Endpoint Encryption users** to allow all users, domain and local accounts, to authenticate Endpoint Encryption devices.
 - Select **Select specific users** to specify which already added Endpoint Encryption users can authenticate to managed endpoints.
-

**Note**

Policy rules only affect existing user accounts. Before configuring policies, add new users with the Endpoint Encryption Users Widget. For more information, see [Adding Users to Endpoint Encryption on page E-176](#).

Configuring Full Disk Encryption Rules

The following procedure explains the configurable options for policy rules affecting Full Disk Encryption devices.

**Note**

Encryption Management for Microsoft BitLocker and Encryption Management for Apple FileVault do not require authentication and are not affected by authentication policies. Client, login, password, and authentication policies, or allowing the user to uninstall the Endpoint Encryption agent software only affects the Full Disk Encryption and File Encryption agents.

Procedure

1. Create a new Endpoint Encryption policy.

See *Creating a Policy on page E-174*.

2. Click **Full Disk Encryption**.

The **Full Disk Encryption** policy rules settings appear.

FIGURE E-3. Full Disk Encryption Policy Rules

3. Under **Encryption**, select **Encrypt device** to start full disk encryption when the Endpoint Encryption agent synchronizes policies with PolicyServer.



WARNING!

Do not deploy encryption to Full Disk Encryption agents without first preparing the endpoint's hard drive.

For information about preparing the hard drive, see *Full Disk Encryption Deployment Outline* in the *Endpoint Encryption Installation Guide*.

4. Under **Agent Settings**, select the following options:

- Select **Bypass Full Disk Encryption Preboot** to allow the user to authenticate directly into Windows without protection from preboot authentication.
- Select **Users are allowed to access system recovery utilities on the device** to allow the user to access the Recovery Console.

For information about configurable options and available tools in Full Disk Encryption, see [Full Disk Encryption Recovery Console on page E-185](#).

5. Under **Notifications**, configure the following options:

- Select **If found, display the following message on the device** to show a message when the **If Found** policy is active.
- Select **Display Technical Support contact information** to show a message after the user logs on to the Full Disk Encryption agent.
- Select **Show a legal notice** to show the specific legal message at start up or only after installing the Full Disk Encryption agent.

Full Disk Encryption Recovery Console

Recovery Console helps you recover Full Disk Encryption devices in the event of primary operating system failure, troubleshoot network connectivity issues, and manage policies when not connected with PolicyServer.



WARNING!

Use Recovery Console before running standard Windows diagnostic and repair utilities.

All policy changes are overwritten when the Full Disk Encryption agent synchronizes policies with PolicyServer.

Configuring File Encryption Rules

The following procedure explains the configurable options for policy rules affecting File Encryption devices.

Procedure

1. Create a new Endpoint Encryption policy.

See [Creating a Policy on page E-174](#).

2. Click File Encryption.

The **File Encryption** policy rules settings appear.

File Encryption

Folders To Encrypt

%DESKTOP%Encrypted Files

Add Remove

Encryption Key

☐ User key: Use a unique key for each Endpoint Encryption user. Only the user can access files.
☒ Policy key: Use a unique key for each policy. Only Endpoint Encryption users and devices in the policy can access files.
☐ Enterprise key: Any Endpoint Encryption user or device in the Enterprise can access files.

Storage Devices

Disable optical drives : No

Disable USB drives : Logged out

☐ Encrypt all files and folders on USB devices
☒ Specify the file path to encrypt on USB devices ⓘ

Add Remove

Notifications

☐ Show a legal notice
☐ Installation
☒ Startup

Specify the body of the legal notice...

FIGURE E-4. File Encryption Policy Rules

3. Under **Folder to Encrypt**, specify folders that are automatically created and encrypted on the endpoint when the File Encryption agent synchronized policies.

4. Under **Encryption Key**, select the encryption for the File Encryption encrypted folder.
 - **User key:** Use a unique key for each Endpoint Encryption user. Only the Endpoint Encryption user can decrypt files that he or she encrypted.
 - **Policy key:** Use a unique key for each policy. Only Endpoint Encryption users and devices in the policy can decrypt files.
 - **Enterprise key:** Any Endpoint Encryption user or device in the Enterprise can decrypt the files.

**Note**

Selecting **Policy key** or **Enterprise key** controls the sharing for the File Encryption shared key. For more information, see [File Encryption Shared Key Encryption on page E-188](#).

5. Under **Storage Devices**, configure the following options:
 - Select **Disable optical drives** to control whether removable media is accessible from the endpoint.
 - Select **Disable USB drives** to control when the USB ports are disabled. Options are:
 - **Always**
 - **Logged out**
 - **Never**
 - Select **Encrypt all files and folders on USB devices** to automatically encrypt all the files and folders on removable drives when plugged into the endpoint.
 - Select **Specify the file path to encrypt on USB devices** to add or remove encrypted folders to USB drives. If a folder does not exist, it is created. If no drive letter is specified, all USB devices are affected.

6. Under **Notifications**, select **Show a legal notice** to show the specific legal message at start up or only after installing the File Encryption agent.
-

File Encryption Shared Key Encryption

Use the Shared Key function to encrypt files strictly for access by members of the same policy group.

The policies are available at:

- In Control Manager, go to **Policies > Policy Management**, select the policy, then modify **Common** policy rules. For more information, see [Configuring Common Policy Rules on page E-188](#).
- PolicyServer MMC, set **File Encryption > Encryption > Encryption Method Allowed** to **Group Key**



Note

To allow any File Encryption user within the PolicyServer Enterprise, to view encrypted files, set **Encryption Key Used** to **Enterprise Key**.



Note

File Encryption creates a new file when encrypting a file. The original file remains unencrypted in its original location.



WARNING!

Depending on how Windows permissions are configured, a user can view encrypted folder contents if switching between users without restarting Windows. While the file names and folder content may be viewed, the file contents are not available. This is due to Windows Operating system caching the file structure for quick search capability.

Configuring Common Policy Rules

This section explains the configurable options for policy rules affecting all Endpoint Encryption devices.

Procedure

1. Create a new Endpoint Encryption policy.

See *Creating a Policy on page E-174*.

2. Click **Common**.

The **Common** policy rules settings appear.

Common

Allow User To Uninstall

☐ Allow User (non-Administrator) accounts to uninstall agents

Lockout and Lock Device Actions

☒ Lock account after: 360 days (1 to 999)

Account lockout action: Remote authentication

☒ Failed logon attempts allowed: 5 (1 to 100)

Full Disk Encryption :Device locked action: Time delay

Number of minutes to lock device: 1 (1 to 999999)

File Encryption :Device locked action: Time delay

Number of minutes to lock device: 1 (1 to 999999)

Password

Users must change password after: 60 days (1 to 1000000)

☐ Users cannot reuse the previous: 5 passwords (1 to 255)

☒ Number of consecutive characters allowed in a password: 3 (1 to 255)

☒ Minimum length allowed for passwords: 6 (1 to 255)

Password Character Requirements

The following rules specify the required amount of letters, lowercase/uppercase characters, numbers, or symbols that users must have in their passwords. The sum total of letters, numbers, and symbols cannot exceed 255 characters.

☐ Letters: 1 (1 to 255)

☐ Lowercase characters: 1 (1 to 255)

☐ Uppercase characters: 1 (1 to 255)

☐ Numbers: 1 (1 to 255)

☐ Symbols: 1 (1 to 255)

FIGURE E-5. Common Policy Rules

3. Under **Allow User to Uninstall**, select **Allow User (non-administrator) accounts to uninstall agent software** to allow any Endpoint Encryption user to uninstall the agent.

**Note**

By default, only Enterprise Administrator accounts can uninstall Endpoint Encryption agents.

4. Under **Lockout and Lock Device Actions**, configure the following options:

- Select **Lock account after <number> days** to specify the number of days that the Endpoint Encryption device locks if it does not synchronize policies.
- Use **Account lockout action** to specify whether the remote authentication or erase action occurs at lockout.

**Note**

For information about lock options, see [Account Lockout and Device Lock Actions on page E-191](#)

- Select **Failed log on attempts allowed** to specify how many times that a user can attempt to authenticate before the Endpoint Encryption device locks.
- For Full Disk Encryption or File Encryption devices, separately configure the following:
 - Use **Device locked action** to specify whether the “Remote Authentication” or the “Erase” action occurs at lockout.

**Note**

For information about lock options, see [Account Lockout and Device Lock Actions on page E-191](#)

5. Under **Password**, configure the following options:

- Select **Users must change password after <number> days** to control when a user is prompted to update password.

- Select **Users cannot reuse the previous <number> passwords** to specify how many previous passwords the user may reuse.
 - Select **Number of consecutive characters allowed in a password** to specify how many repeated characters a user may specify in the password.
 - Select **Minimum length allowed for passwords** to specify how many characters the user is required to use in the password.
6. Under **Password Requirements**, specify the password character limitations.
- **Letters**
 - **Lowercase characters**
 - **Uppercase characters**
 - **Numbers**
 - **Symbols**

**Important**

The sum total of letters, numbers, and symbols cannot exceed 255 characters.

Account Lockout and Device Lock Actions

Some policies have settings to lock out a user account or to lock a device based on certain criteria. Account lockout and device lock actions affect the Endpoint Encryption device whether or not the agent synchronizes policies with PolicyServer. For example, if the Endpoint Encryption agent does not communicate with PolicyServer for a certain period of time, the Endpoint Encryption agent automatically locks the Endpoint Encryption device. Use the tables below to understand the actions available for the account lockout and device lock actions.

TABLE E-44. Account Lockout Actions

ACTION	DESCRIPTION
Remote authentication	Users cannot log on to the Endpoint Encryption device until after Technical Support provides remote authentication assistance.

ACTION	DESCRIPTION
Erase	All data is erased the next time that the agent synchronizes policies.

**Note**

Account lockout actions take effect when the Endpoint Encryption agent does not communicate with PolicyServer for a certain period of time (set by policy).

TABLE E-45. Device Lock Actions

ACTION	DESCRIPTION
Erase	All data is erased the next time that the Endpoint Encryption agent synchronizes policies.
Remote authentication	Users cannot log on to Endpoint Encryption devices until after Technical Support provides remote authentication assistance.
Time delay	Users cannot log on to Endpoint Encryption devices for a specified time duration.

**Note**

Device lock actions take effect when the Endpoint Encryption user has too many unsuccessful logon attempts to that Endpoint Encryption device (set by policy).

Remote Help Policy Rules

The following table describes the locations of the account lockout and device lock policies that affect Remote Help authentication. Use it to understand which policies are appropriate to set.

TABLE E-46. Remote Help Policy Locations

POLICY NAME	POLICYSERVER MMC MENU PATH	CONTROL MANAGER MENU PATH	DESCRIPTION
Account Lockout Action	Login > Account Lockout Action	Common > Lockout and Lock Device Actions > Account Lockout Action	The action taken when the length of time in "Account Lockout Actions" include: erase, remote authentication.
Account Lockout Period	Login > Account Lockout Period	Common > Lockout and Lock Device Actions > Lock account after [] days	The number of days that a device can not communicate with PolicyServer before "Account Lockout Action" is called.
Device Locked Action	For each agent: Login > Device Locked Action	For each agent: Common > Lockout and Lock Device Actions > Device locked action	The action taken when the "Failed Attempts Allowed" policy value has been exceeded. Actions include: time delay, erase, remote authentication.
Failed Login Attempts Allowed	For each agent: Login > Failed Login Attempts Allowed	For each agent: Common > Lockout and Lock Device Actions > Failed login attempts allowed	The number of failed login attempts allowed before executing the action defined in "Device Locked".

Mobile Security Product Settings

This section contains information on configuring Mobile Security settings for policy management.

Common Policy

Common Policy provides the common security policies for mobile devices. To configure common security policy settings, click **Policies**, then click the policy name, and then click **Common Policy**.

In **Common Policy** you can also assign policies for BlackBerry mobile devices.

- **User Privileges:** You can enable or disable the feature that allows users to uninstall the Mobile Device Agent. Additionally, you can select whether to allow users to configure Mobile Security device agent settings.

The following is a list of features associated with uninstall protection:

- turn On/Off uninstall protection from the administration console
- password length must have a minimum of six (6) and a maximum of twelve (12) characters; password may contain numbers, characters or symbols.
- password can be set for each group from the administration console.

If you do not select the **Allow users to configure Mobile Security client settings** check box, users cannot change Mobile Device Agent settings. However, the filtering lists for **Spam Prevention Policy**, **Call Filtering Policy** and **Web Threat Protection Policy** are not affected when this option is selected. For more information, see *Spam SMS Prevention Policies on page E-215*, *Spam WAP-Push Prevention Policies on page E-217* and *Web Threat Protection Policy on page E-222*.

- **Update Settings:** You can select to have the Mobile Security server notify Mobile Device Agents when a new component is available for update. Or you can select the auto-check option to have Mobile Device Agents periodically check for any component or configuration updates on the Mobile Security server.

When you enable the wireless connection notification option, a prompt screen displays on mobile devices before Mobile Device Agents connect to the

Communication Server through a wireless connection (such as 3G or GPRS). Users can choose to accept or decline the connection request.

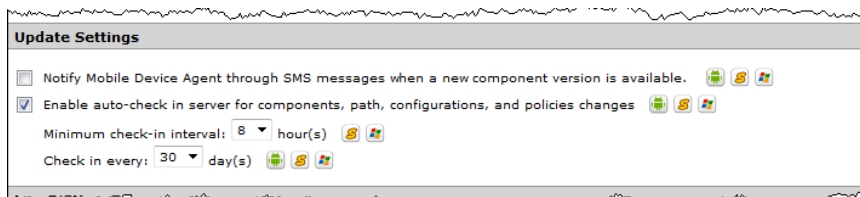


FIGURE E-6. Common Policy, Update Settings section

- **Log Settings:** When Mobile Device Agents detect a security risk, such as an infected file or firewall violation, a log is generated on mobile devices. If the Encryption Module is activated, the encryption logs are also generated. You can set the mobile devices to send these logs to the Mobile Security server. Do this if you want to analyze the number of infections or pinpoint possible network attacks and take appropriate actions to prevent threats from spreading.
- **Notification/Reports Settings:** Select whether to display a prompt screen on mobile devices when a mobile device agent tries to establish a connection to the Communication Server.
- **BlackBerry Settings:** Enables you to configure common policy settings for BlackBerry mobile devices.



Note

You must configure the BlackBerry Settings in the Communication Server settings before you can configure the policy settings. Refer to the topic *Configuring BlackBerry Communication Server Settings* in the *Installation and Deployment Guide*.

Application Monitor and Control Policy

Application monitor and control policies provide you server-side control of the applications installed on mobile devices and push the required applications to the mobile devices.

To configure application monitor and control policy settings, click **Policies**, then click the policy name, and then click **Application Monitor and Control Policy**.

- **Required Applications**—selecting this option will push all the applications that you add in the list, to the mobile devices.
- **Permitted Applications**—control the applications installed on mobile devices by using approved and blocked lists.

For iOS mobile devices, Mobile Security sends notification to administrator and the user for any application that does not comply with the policy.

For Android mobile devices, Mobile Security blocks the application that does not comply with the policy and will allow all others.

- **Enable system apps blocking** (Android only):

if selected, Mobile Security will block all the system apps on Android mobile devices.

- **Enable Application Category:** select the application category that you want to enable or disable on mobile devices. You can also make the exception by adding the applications that belong to these categories to the approved or blocked list. For example, if you have disabled a category type Games, Mobile Security will block all the applications that belong to this category, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they belong to the category that you have disabled.
 2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they belong to the category that you have enabled.
 3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the category that they belong to.
- **Enable Application Permissions** (for Android only): select the application services that you want to enable or disable on Android mobile devices. You can also make the exception by adding the applications that use these services to the approved or blocked list. For example, if you have disabled service type

Read Data, Mobile Security will block all the applications that use the Read Data service, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they use the services that you have disabled.
 2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they use the services that you have enabled.
 3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the services that they use.
- **Only allow the following applications:** add the applications to the approved list that you want to allow users to use on their mobile devices. If enabled:
 - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are not in the approved list.
 - On iOS mobile devices, if Mobile Security detects any application that is not in the approved list, Mobile Security sends an email notification to the user.
 - **Only block the following applications:** add the applications to the blocked list that you do not want users to use on their mobile devices. If enabled:
 - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are in the blocked list.
 - On iOS mobile devices, if Mobile Security detects any application that is in the blocked list, Mobile Security sends an email notification to the user.
 - **Lock to App (for Supervised Mode Only)**—restrict the iOS mobile device to the specified application.

Mobile Security checks for restricted applications and sends email alert to the users:

- automatically according to the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**, or
- when you update the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**.

Compliance Policy

Compliance policy enables you to set the compliance criteria for the mobile devices. If any mobile device does not match the criteria, Mobile Security displays its non-compliant status on the server UI. Mobile Security also sends an email to the non-compliant iOS mobile device, while it displays a notification on non-compliant Android mobile devices. The compliance check list includes:

- **Rooted/Jailbroken**—checks whether the mobile device is rooted/jailbroken or not.
- **Unencrypted**—checks whether the encryption is enabled on the mobile device or not
- **OS version check**—checks whether the OS version matches the defined criteria or not.

To configure compliance policy settings, click **Policies**, then click the policy name, and then click **Compliance Policy**.

Certificate Policy

Certificate Policy enables you to import certificates that you need to deploy on iOS mobile devices.

To configure certificate policy settings, click **Policies**, then click the policy name, and then click **Certificate Policy**.

Exchange ActiveSync Policy

Exchange ActiveSync Policy enables you to create an Exchange ActiveSync policy for your organization and deliver it to iOS mobile devices.

To configure Exchange ActiveSync policy settings, click **Policies**, then click the policy name, and then click **Exchange ActiveSync Policy**.

Encryption and Password Policy

The encryption and password module provides password authenticating and data encryption on mobile devices. These features prevent unauthorized access to data on mobile devices.

To configure encryption and password policy settings, click **Policies**, then click the policy name, and then click **Encryption and Password Policy** from the left-menu.

Password Security Settings

When Mobile Device Agent is installed, each mobile device is associated with a user. The user must type the correct power-on password to log on to the mobile device. When a user has forgotten the power-on password, you can type the administrator password to unlock a mobile device.

The following table describes the power-on password policies you can configure:

OPTION	DESCRIPTION
Password type	Passwords must contain only numbers or alphanumeric characters.
Minimum password length	Passwords must be longer than the number of characters specified.
Password complexity	For alphanumeric passwords, users must configure passwords that contain upper case, lower case, special characters, or numbers to make passwords harder to guess.

OPTION	DESCRIPTION
Initial Mobile Device Agent password	Password that allows users to log on to their Windows Mobile devices after installing the Mobile Device Agent and the Encryption Module. The default is "123456".
Admin password	Password used by an administrator to unlock a mobile Device.
Expiry period	The number of days a logon password is valid. After the password expires, the user must configure a new password to log on.
Inactivity timeout	The number of minutes of no user activity before the mobile device automatically goes into secure mode and display the logon screen.
Limit logon attempts	Limit the number of logon attempts to prevent brute force password attack. Possible actions when the limit is reached: • Soft reset—restarts the mobile device. • Admin access only—requires logon using the administrator password. • Hard reset—resets the mobile device back to the factory default policies. • Clear all data—resets the mobile device back to the factory default policies and deletes all the data on the mobile device and the inserted memory card.  WARNING! After a "Clear all data" action, users need to reformat the memory card to use it again for storing data.
Change initial power-on password	Request users to change the initial password after the first logon.
Forgotten password questions	If a user has forgotten the power-on password, this feature allows the user to unlock mobile devices and configure a new password by answering the selected question.

**Note**

When specifying the characters for the initial or admin password, keep in mind the input method used by mobile devices. Otherwise, the device user may not be able to unlock the device after encryption is enabled.

Encryption Settings

Mobile Device Agent provides on-the-fly data encryption function to secure data on mobile devices. Two encryption algorithms are available: Advanced Encryption Standard (AES, with 128-bit, 192-bit, or 256-bit keys) and XTS-Advanced Encryption Standard (AES).

**Note**

Mobile Security can only manage the data security policy on Windows Mobile devices.

You can select specific file types to encrypt on Windows Mobile devices, the encryption algorithm to use, trusted applications that are allowed to access encrypted data, or apply data encryption on memory cards inserted on mobile devices.

Mobile Device Agent does not encrypt Dynamic Link Library (*.DLL) files. Mobile Device Agent only encrypts files that a user has modified. Reading a file and closing it without any modifications does not result in the file being encrypted.

After the Encryption Module is enabled, certain file types and PIM information are encrypted. These file types and PIM Information are listed in the following table.

ENCRYPTED INFORMATION	TYPES
File Types	• doc • txt • ppt • pxl • pdf • xls • psw • docx
PIM Information	• Contacts • Mail • Tasks • Calendar • SMS • MMS

The Encryption Module only allows trusted applications to access encrypted data. Therefore, you must add these applications to the trusted application list. To add software to the trusted application list, add the full software path to the appropriate list under: "**Allow more applications to access encrypted data**".

**Note**

For advanced configuration, you can set Mobile Security to encrypt other file types. To enable encryption of custom file types, set the parameter **Enable_Custom_Extension** to **1** in the file TmOMSM.ini (located in \Trend Micro\Mobile Security). When the parameter is set to "1" in the file TmOMSM.ini, the **Encrypt other file types** field displays in the **Data Security Policies** screen. Specify the file types in this field.

To disable this feature, set the parameter **Enable_Custom_Extension** to **0**. When the parameter is set to "0" in the file TmOMSM.ini, the **Encrypt other file types** field is not available in the **Data Security Policies** screen.

After making the change in the TmOMSM.ini file, restart **Mobile Security Management Module Service** for the change to take effect.

**WARNING!**

Trend Micro does not recommend customizing file types for encryption. You cannot encrypt certain file types (for example, .exe, .cert, .dll, etc.). If you set Mobile Security to encrypt file types that should not be encrypted, unexpected system errors may occur.

Feature Lock Policy

With this feature, you can restrict (disable) or allow (enable) the use of certain mobile device features/components. For example, you can disable the camera for all mobile devices in a particular group.

To configure Feature Lock Policy settings, click **Policies**, then click the policy name, and then click **Feature Lock Policy** from the left-menu.

See [Supported Mobile Device OS Features on page E-204](#) for the list of supported features/components.

**Note**

The Feature Lock Policy is NOT available for Symbian mobile devices.

**WARNING!**

Use caution while disabling WLAN/WIFI and/or Microsoft ActiveSync. The mobile device may not be able to communicate with the server if both these options are unavailable.

For Android mobile devices, you can also add access point(s) to control the availability of the device components within the range of those access point(s).

**Note**

Windows Mobile devices may need to reboot for changes to take effect.

Supported Mobile Device OS Features

The following table shows the list of features that Trend Micro Mobile Security supports per platform.

TABLE E-47. Trend Micro Mobile Security 9.0 Feature Matrix

POLICY	FEATURES	SETTINGS					
Provisioning	Wi-Fi	Standard Wi-Fi configuration	●	●	●		
		Legacy hotspot configuration	●				
		Hotspot 2.0 configuration	●				
	Exchange ActiveSync	Exchange ActiveSync configuration	●				
	VPN	VPN configuration	●		●		
	Global HTTP Proxy	Global HTTP Proxy configuration	●				
	Single Sign-on	Single sign-on configuration	●				
	Certificate	Certificate configuration	●				

POLICY	FEATURES	SETTINGS					
Device Security	Malware Protection	Real-time scan		●		●	●
		Card scan				●	●
		Scan after pattern update		●			
Data Protection	Spam SMS Prevention	Server-side control		●	●	●	●
		Use blocked list		●	●	●	●
		Use approved list		●	●	●	●
	Spam WAP Push Prevention	Server-side control		●		●	●
		Use approved list		●		●	●
	Call Filtering	Server-side control		●	●		
		Use blocked list		●	●		
		Use approved list		●	●		
	Firewall	Enable firewall			●	●	●
		Enable Intrusion Detection System (IDS)				●	●
	Web Threat Protection	Server-side control		●			
		Use blocked list		●			
		Use approved list		●			
		Allow specific Web sites only	●				
		Allow limited adult content	●				

POLICY	FEATURES	SETTINGS					
Data Protection	Password Settings	Use Password for login	●	●	●	●	
		Admin password				●	
		Allow simple password	●	●	●	●	
		Require alphanumeric password	●	●	●	●	
		Minimum password length	●	●	●	●	
		Password expiration	●	●		●	
		Password history	●	●		●	
		Auto-lock	●	●		●	
		Password failure action	●	●	●	●	
	Encryption	Encrypt PIM				●	
		Encrypt documents				●	
		Encrypt memory cards				●	
	Feature Lock	Camera	●	●		●	
		FaceTime	●				
		Screen capture	●				
		Apps installation	●				

POLICY	FEATURES	SETTINGS					
Data Protection	Feature Lock	Sync while roaming	●				
		Voice dialing	●		●		
		In-app purchase	●				
		Multiplayer gaming	●				
		Adding game center friends	●				
		Game Center (Supervised Only)	●				
		Force encrypted backups	●				
		Explicit music, podcast and iTunes U	●				
		Passbook while device is locked	●				
		Bluetooth and Bluetooth discovery		●		●	
		Infrared				●	
		USB storage				●	
		WLAN/Wi-Fi		●		●	
		3G data network		●			

POLICY	FEATURES	SETTINGS					
Data Protection	Feature Lock	Tethering		●			
		Developer mode		●			
		Serial				●	
		Speaker/speakerphone/ microphone			●	●	
		Microsoft ActiveSync				●	
		MMS/SMS				●	
		Restrict memory cards		●		●	
		Restrict GPS				●	
		Siri	●				
		Siri while device is locked	●				
		Enable profanity filter	●				
		Enable access to iCloud services	●				
		Cloud backup	●				
		Cloud document sync	●				
		Photo Stream	●				

POLICY	FEATURES	SETTINGS					
Data Protection	Feature Lock	Shared Photo Streams	●				
		Diagnostic data	●				
		Accept untrusted Transport Layer Security (TLS)	●				
		Force iTunes to store password	●				
		YouTube	●				
		Open documents from managed apps in other apps	●				
		Open documents from other apps in managed apps	●				
		iTunes	●				
		Safari Web browser	●				
		AutoFill	●				
		JavaScript	●				
		Popups	●				
		Force fraud warning	●				
		Accept cookies	●				
		Removing apps (Supervised only)	●				
		Bookstore (Supervised only)	●				

POLICY	FEATURES	SETTINGS					
Data Protection	Feature Lock	Erotica (Supervised only)	●				
		Configuration Profile Installation (Supervised only)	●				
		iMessage (Supervised only)	●				
		Ratings region	●				
		Movies	●				
		TV Shows	●				
		Apps	●				
Remote control		Register	●	●	●	●	●
		Update	●	●	●	●	●
	Anti-theft	Remote locate		●	●		
		Remote lock	●	●	●	●	
		Remote wipe	●	●	●	●	
		Reset password	●	●	●	●	

Firewall Policy

The Mobile Security firewall protects mobile devices on the network using stateful inspection, high performance network traffic control and the intrusion detection system (IDS). You can create rules to filter connections by IP address, port number, or protocol, and then apply the rules to mobile devices in specific Mobile Security groups.



Note

Trend Micro recommends uninstalling other software-based firewall applications on mobile devices before deploying and enabling Mobile Security firewall. Multiple vendor firewall installations on the same computer may produce unexpected results.

To configure firewall policy settings, click **Policies**, then click the policy name, and then click **Firewall Policy**.

A firewall policy includes the following:

- **Firewall Policy:** Enable/Disable the Mobile Security firewall and the IDS. Also includes a common policy that blocks or allows all inbound and/or all outbound traffic on mobile devices
 - **Enable Intrusion Detection System (IDS):** The Mobile Security firewall integrates the Intrusion Detection System (IDS) and helps prevent SYN Flood attacks (a type of Denial of Service attack) where a program sends multiple TCP synchronization (SYN) packets to a computer, causing the mobile device to continually send synchronization acknowledgment (SYN/ACK) responses. This can exhaust system resource and may leave mobile devices unable to handle other requests.
 - **Security level:** The Mobile Security firewall comes with three pre-defined security levels that allow you to quickly configure firewall policies. These security levels limit network traffic based on traffic directions.
 - **Low**—allow all inbound and outbound traffic.
 - **Normal**—allow all outbound traffic but block all inbound traffic.
 - **High**—block all inbound and outbound traffic.
- **Exception:** Exception rules include more specific settings to allow or block different kinds of traffic based on mobile device port number(s) and IP address(es). The rules in the list override the **Security level** policy.

Exception rule settings include the following:

- **Action**—blocks or allows/logs traffic that meets the rule criteria
- **Direction**—inbound or outbound network traffic on mobile devices
- **Protocol**—type of traffic: TCP, UDP, ICMP
- **Port(s)**—ports on the mobile devices on which to perform the action
- **IP addresses**—IP addresses of network devices to which the traffic criteria apply

Call Filtering Policy

This feature provides you server-side control of call filtering policies. To configure call filtering policy settings, click **Policies**, then click the policy name, and then click **Filtering Policy**.

The following features are available when configuring the Call Filtering Policies:

- enable or disable call filtering for mobile device
- configure the mobile device to use a blocked list or an approved list
- configure an approved list from the administration console
- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

TABLE E-48. Filtering list configuration for Call Filtering Policy

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Disabled	Enabled	The user can edit the approved/blocked list on the mobile device agent. Mobile Security allows or blocks the URLs based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent
Enabled	Disabled	The user is only allowed to edit the approved/blocked list on the mobile device agent. Mobile Security allows or blocks the incoming calls based on the following priority: 1. Blocked List on server 2. Approved List on Mobile Device Agent 3. Blocked List on Mobile Device Agent You can also configure server-side control for outgoing calls on Android mobile devices.

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Enabled	Enabled	The user can view or edit the approved/blocked list defined by the administrator and can also use the approved/blocked list on the mobile device agent. When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies. Mobile Security allows or blocks the incoming calls based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent 3. Blocked List on server You can also configure server-side control for outgoing calls on Android mobile devices.

**Note**

The call filtering approved and blocked list must use the format: "[name1:]number1; [name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.

Global HTTP Proxy Policy

Global HTTP Proxy Policy enables you to deliver your organization's proxy information to mobile devices. This policy only applies to iOS mobile devices that are in supervised mode.

To configure global HTTP proxy policy settings, click **Policies**, then click the policy name, and then click **Global HTTP Proxy Policy**

Malware Protection Policy

You can configure threat protection policies that include: Scan type (real-time and card scan), action taken for malware, number of compression layers to scan, and the File type.

To configure malware protection policy settings, click **Policies**, then click the policy name, and then click **Malware Protection Policy**.

- **Scan Types:** Mobile Security provides several types of scans to protect mobile devices from malware.
 - **Real-time Scan:** Mobile Device Agent scans files on mobile devices in real time. If Mobile Device Agent detects no security risk, users can proceed to open or save the file. If Mobile Device Agent detects a security risk, it displays the scan result, showing the name of the file and the specific security risk. Mobile Security will generate a log with the scan result on the mobile device. The scan log is sent and stored on the Mobile Security database.
 - **Scan after SD card insert:** If you select this option in the **Malware Protection Policy** screen, Mobile Security scans data on a memory card when the memory card is inserted to a mobile device. This prevents infected files from spreading through memory cards.
 - **Scan after pattern update:** If you select the this option in the **Malware Protection Policy** screen, Mobile Security will run an automatic-scan for security threats after successful pattern update on Android mobile devices.
- **Scan Options**
 - **Action on malware:** When malware is detected on a mobile device, Mobile Security can delete or quarantine the infected file. If the file is in use, the operating system may deny access to it.
 - Quarantine—renames and then moves an infected file to the mobile device's quarantine directory in \TmQuarantine (for Windows Mobile) or {Disk Label}\TmQuarantine (for Symbian OS).
 - Delete—removes an infected file.

When connected, Mobile Device Agents send malware logs to the Mobile Security server.

**Note**

Scan actions only apply to Real-time scan.

- **Compression layers to scan:** For ZIP or CAB files, you can specify the number of compression layers to scan. If the number of compression in a ZIP/CAB file exceeds this number, Mobile Security will not scan the file. Mobile Security will take no further action unless the appropriate number of compression layers are specified.

You can select to have Mobile Security scan executable, ZIP/CAB files, or all files on mobile devices.

- **Scan Location:** For Android mobile devices, select whether to scan mobile device's internal memory and/or the inserted SD card. For SymbianMobile Security scans both the mobile device's internal memory and the inserted SD card.
- **File type:** Select the file types to scan on mobile devices.

Spam Prevention Policy

The spam prevention policy in Mobile Security provides protection against spam WAP-push and SMS text messages.

To configure spam prevention policy settings, click **Policies**, then click the policy name, and then click **Spam Prevention Policy**.

Spam SMS Prevention Policies

This feature provides you server-side control of SMS spam prevention policies. The following features are available when configuring the SMS Spam Prevention Policies:

- enable or disable spam SMS prevention for mobile device
- configure the mobile device to use a blocked list, approved list or disable the SMS anti-spam feature for mobile device.
- configure an approved list from the administration console

- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

TABLE E-49. Filtering list configuration for Spam SMS Prevention Policy

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Disabled	Enabled	The user can edit the approved/blocked list on the mobile device agent. Mobile Security allows or blocks the messages based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent
Enabled	Disabled	The user is only allowed to edit the approve/blocked list on the mobile device agent. Mobile Security allows or blocks the messages based on the following priority: 1. Approved List or Blocked List on server 2. Approved List on Mobile Device Agent 3. Blocked List on Mobile Device Agent
Enabled	Enabled	The user can view or edit the approved/blocked list defined by the administrator and can also use the approved/blocked list on the mobile device agent. When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies. Mobile Security allows or blocks the messages based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent 3. Approved List or Blocked List on server

**Note**

The SMS approved and blocked list must use the format: "[name1:]number1; [name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.

Spam WAP-Push Prevention Policies

This feature provides you server-side control of WAP-Push Protection. If enabled, you can select whether to use a WAP approved list. The following features is a list of features available when configuring WAP-Push Protection policies:

- enable or disable WAP-Push protection for mobile device
- configure the mobile device to use an approved list or disable WAP-Push protection on the mobile device
- configure an approved list from the administration console
- if the administrator has enabled server-side control, the user will be unable to change the WAP-Push protection type defined by the administrator
- if the administrator has disable server-side control, and allowed users to configure Mobile Security settings on mobile device, the user will be unable to view or edit the WAP-Push protection list configured by the administrator, and may edit the personal WAP-Push protection list on the mobile device side

The personal settings will be cleared after server policy is delivered to a mobile device.

**Note**

The WAP approved list must use the format: "[name1:]number1;[name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.

**Note**

The users' personal settings for spam messages will be cleared after the spam prevention policy is applied on the Mobile Device Agents.

Single Sign-On Policy

Single sign-on (SSO) policy enables the users to use the same credentials across applications, including Mobile Security and applications from the App Store. Each new application configured with SSO certification verifies user permissions for enterprise resources, and logs users in without requiring them to reenter their passwords.

The single sign-on policy includes the following information:

- **Name:** the Kerberos principal name.
- **Realm** : The Kerberos realm name.

The Kerberos realm name should be properly capitalized.

- **URL Prefixes** (Optional): List of URLs that must be matched in order to use an account for Kerberos authentication over HTTP. If this field is blank, the account is eligible to match all http and https URLs. The URL matching patterns must begin with either http or https.

Each entry of this list must contain a URL prefix. Only the URLs that begin with one of the strings in an account are allowed to access the Kerberos ticket. URL matching patterns must include the scheme. For example, http://www.example.com/. If a matching pattern does not end in /, it will automatically add a / to the URL.

- **Application Identifiers** (Optional): List of application identifiers that are allowed to use the account. If this field is blank, this account matches all application identifiers.

The **Application Identifiers** array must contain strings that match application bundle IDs. These strings may be exact matches (such as com.mycompany.myapp) or may specify a prefix match on the bundle ID by using the * wildcard character. The wildcard character must appear after a period character (.), and may appear only at the end of the string (such as com.mycompany.*). When a wildcard is used,

any application whose bundle ID begins with the prefix is granted access to the account.

To configure Single Sign-On Policy for iOS settings, click Policies, then click the policy name, then click Single Sign-On Policy.

VPN Policy

VPN policy settings enables you to create a VPN Policy for your organization and deliver it to iOS mobile devices.

To configure VPN policy settings, click **Policies**, then click the policy name, and then click **VPN Policy**

Volume Purchasing Program Policy

This policy enables the administrator to import the iOS applications to the Mobile Security administration Web console that are purchased through the Apple's Volume Purchase Program. Mobile Security will push all the applications in the Volume Purchasing Program List to mobile devices in a group.

To configure Volume Purchasing Program policy:

1. Add applications to the Enterprise App Store. See [Adding an Application on page E-219](#) for the procedure.
2. Click **Policies**, then click the policy name, and then click **Volume Purchasing Program Policy**.
3. Click **Import** and then select applications to import from the Enterprise App Store.
4. Click **Save** to push all the applications to the iOS mobile devices.

Adding an Application

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **App Store** on the menu bar.

The **Enterprise App Store** screen displays.

3. Click the **iOS Applications** tab or **Android Applications** tab.

4. Click **Add**.

The **Add Application** window displays.

5. You can now add an application to the list using one of the following options:

- **Add from local computer**—select an installation file for Android or iOS mobile devices.
- **Add a Webclip**—type the application's URL and the application's icon will appear on the home screen of user's mobile device, and the link will open in the default Web browser on the mobile device.
- (Android) **Add from external application store**—type the link to the application in an external app store. The application's icon will appear on the home screen of user's mobile device, and the link will open in the default Web browser on the mobile device.
- (iOS) **Please input search keyword**—type the name of the VPP application you want to search and select a country to search the application in its Apple app store, and then select the application you want to add from the search results. Once added, the VPP application is only available in the **App Store** on Mobile Security administration Web console. To push the application to mobile devices, you will need to add the application to the **Volume Purchasing Program Policy**. See *Volume Purchasing Program Policy on page E-219* for the procedure.

6. Click **Continue**.

The **Edit Application** screen displays.

7. Configure the following:

- **Application name:** type a name for the application.
- **Application icon:** if the application icon does not appear, click Upload app icon to select and upload the application icon.

- **Application ID:** if the application ID does not appear, type the application ID.
- **VPP codes file:** For iOS VPP application, upload the Volume Purchase Code files that you have received from Apple.
- **Category:** select a category for the application.

**Note**

You must select a category from the drop-down list. To add or delete a category, click the **Category** button.

- **Description:** type the description for the application.
- **Publish:** select one of the following:
 - **Do not publish**—to upload the application on the server, but keep hidden from the mobile devices.
 - **Publish as production version**—to upload the application on the server, and publish it for mobile devices to download.
 - **Publish as beta version**—to upload the application on the server, and publish it as a beta version for mobile devices to download.
- **Screenshots:** select and upload application screenshots.

8. Click **Continue**.

The application appears in the applications list.

Wi-Fi Policy

Wi-Fi Policy enables you to deliver your organization's Wi-Fi network information to Android and iOS mobile devices; including the network name, security type and password.

To configure Wi-Fi policy settings, click **Policies**, then click the policy name, and then click **Wi-Fi Policy**.

Web Threat Protection Policy

Enables you to manage Web threat protection policy from the Mobile Security server and deploys it on Android and iOS mobile devices. It also enables Android mobile devices to send the Web threat protection log back to the server.

To configure Web Threat Protection Policy settings, click **Policies**, then click the policy name, and then click **Web Threat Protection Policy**.

Web Threat Protection for Android Mobile Devices

Web Threat Protection feature provides you the server-side control of Web threat protection policies on Android mobile devices and provides three pre-defined security levels: **Low**, **Normal**, and **High**. It also provides blocked and approved lists to block or allow certain URLs. Mobile Security will block all the URLs that you add in the Blocked List, and allow all URLs that are in the Approved List.

**Note**

The Web threat protection policy only supports Google Chrome and Android's default Web browser on mobile devices.

Refer to the following table for approved or blocked filtering list configuration details.

TABLE E-50. Filtering list configuration for Web Threat Protection policy

SERVER CONTROL	USER CONTROL	DESCRIPTION
Disabled	Enabled	The user can edit the approved/blocked list on the mobile device agent. Mobile Security allows or blocks the URLs based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent

SERVER CONTROL	USER CONTROL	DESCRIPTION
Enabled	Disabled	The user is only allowed to edit the approved/ blocked list on the mobile device agent. Mobile Security allows or blocks the URLs based on the following priority: 1. Approved List on server 2. Blocked List on server 3. Approved List on Mobile Device Agent 4. Blocked List on Mobile Device Agent
Enabled	Enabled	The user can view or edit the approved/ blocked list defined by the administrator and can also use the approved/ blocked list on the mobile device agent. When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies. Mobile Security allows or blocks the URLs based on the following priority: 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent 3. Approved List on server 4. Blocked List on server

**Note**

The Web threat filtering approved and blocked lists must use the following format: [URL1] [URL2] [URL3], with a blank space or a line break between two URLs.

Web Threat Protection for iOS Mobile Devices

Web Threat Protection provides you the server-side control on supervised iOS mobile devices by providing access to the following:

- Specific Web sites only

- Limited adult content

Refer to the following table for the feature details:

TABLE E-51. Filtering list configuration for Web Threat Protection policy

FEATURE	DESCRIPTION
Specific Web sites only	Using this option will restrict the access to only the Web sites that you have configured on the server. You can add the URLs that you want to allow, on the iOS tab of the Web Threat Protection Policy. These URLs will be added to the Safari Web browser on the users' iOS mobile devices.
Limited adult content	This option uses filtering lists to provide server control of the Web sites that you want to allow or block on iOS mobile devices. These filters block or allow the access of the Web sites irrespective of the default filter settings on iOS mobile devices.

**Note**

The Web threat filtering approved and blocked lists must use the following format: [URL1] [URL2] [URL3], with a blank space or a line break between two URLs.

IWSVA Rules

Data Loss Prevention in IWSVA provides administrators the ability:

- scan outbound traffic for content that includes sensitive corporate data
- create and modify policies using predefined templates to better meet regulatory privacy requirements
- block or monitor data specified in predefined templates

Adding IWSVA Rules

Creating a rule involves the following steps:

- Step 1: Set Rule Name

- Step 2: Select Accounts
- Step 3: Select Templates to Block
- Step 4: Select Templates to Monitor

Procedure

1. Go to **Policies > Policy Management > InterScan Web Security Virtual Appliance > Create**.
2. Under **InterScan Web Security Virtual Appliance DLP**, click **Add**.

The **Add Rule** screen appears.

Step 1: Set Rule Name

Procedure

1. Select **Enable**.
2. Type a meaningful name for the rule.
3. Click **Next**.

The **Select Accounts** screen appears.

Step 2: Select Accounts

Procedure

1. Specify any of the following:
 - **IP Range:** Specify a range of IP addresses
 - **IP/Hostname:** Specify a specific IP address or hostname for an endpoint
 - **IP Subset:** The subset of an IP address

2. Click **Next**.

The **Step 3: Select Compliance Template to Block** screen appears.

Step 3: Select Compliance Templates to Block

These templates prevent your digital assets (for example, social security numbers and credit card numbers) from leaving your company network. They also provide compliance for government regulations regarding privacy.

Procedure

1. Select templates from the Available templates list, and then click >>.

Select multiple templates by pressing and holding the CTRL key and then selecting the templates.

2. Click **Next**.

The **Step 3: Select Compliance Template to Monitor** screen appears.

Step 4: Select Compliance Templates to Monitor

The templates monitor the digital assets (for example, social security numbers and credit card numbers) leaving your company network. They also provide compliance for government regulations regarding privacy.

Procedure

1. Select templates from the Available templates list, and then click >>.

Select multiple templates by pressing and holding the CTRL key and then selecting the templates.

2. Click **Finish**.

The policy appears in the IWSVA DLP policy list.

Index

A

- access rights
 - setting, 3-15
- accounts
 - my account, 3-25
- account types
 - editing, 3-13
- action on monitored system events, E-18
- actions
 - Data Loss Prevention, E-119
- activating
 - Control Manager, 15-7
 - managed products, 15-2
- Activation Code, 15-7
- ActiveAction, E-35, E-67, E-84, E-101
- Active Directory, E-176
- adding
 - managed servers, 6-3
 - user accounts, 3-17
 - user groups, 3-27
 - user roles, 3-10
- Ad Hoc Query, 11-11
- administration
 - adding managed servers, 6-3
 - cloud service settings, 6-7
 - deleting managed servers, 6-5
 - editing managed servers, 6-5
 - managed servers, 6-1
 - stop managing cloud services, 6-10
- advanced permissions
 - configuring, E-21
 - storage devices, E-22, E-23
- agent console
 - access restriction, E-56

- Agent Migration tool, 21-2
- agent security level, E-56
- agent self-protection, E-51
- agent update
 - from the ActiveUpdate server, E-48
 - privileges, E-48
- agent upgrade
 - disable, E-49
- Allow List, E-2
 - creating, E-3
 - importing/exporting, E-4
- auditing logs, 18-7
- automatic deployment settings
 - Scheduled Download, 7-22

B

- Behavior Monitoring
 - action on system events, E-18
- browsing targets, 17-12

C

- cache settings for scans, E-54
- call filtering
 - filtering list configuration, E-212
 - filtering list format, E-213
- centrally managed, 17-13
- changing setting permissions, 17-13
- checklist
 - ports, A-3
 - server address, A-2
- child servers, 16-2
 - registering, 16-3, 16-4
 - unregistering, 16-3
- cloud service configuration, 6-7
- command prompt

- Control Manager, stopping service from, 22-5
- Command Tracking, 9-2
 - query and view commands, 9-4
- communication
 - one-way, 1-8
 - parent-child servers, 16-2
 - two-way, 1-8
- compliance policy
 - check list, E-198
- compliance tab, 8-5
- components
 - downloading, 7-2
 - update privileges and settings, E-48
- compressed files, E-27, E-60, E-77, E-93
 - decompression rules, E-124
- condition statements, 17-34
- configure
 - incident details updated settings, 10-26
 - log aggregation, 11-4
 - network virus alert settings, 10-21
 - scheduled incident summary settings, 10-25
 - significant incident increase settings, 10-24
 - special spyware/grayware alert settings, 10-20
 - special virus alert settings, 10-20
 - virus outbreak alert settings, 10-19, 10-23
- configuring, 7-19
 - managed products, 14-4
 - Outbreak Prevention Mode download settings, 20-16
 - Scheduled Download
 - automatic deployment settings, 7-22
 - Scheduled Download Exceptions, 7-11
 - Scheduled Download Settings, 7-20
 - user accounts, 3-2
- configuring proxy settings
 - managed server list, 6-6
- connection status icons, 13-4
- Control Manager, 1-1, 1-9
 - about, 1-1
 - accounts, 3-2
 - activating, 15-7
 - agent, 1-10
 - antivirus and content security
 - components, 7-2, 7-3
 - basic features, 1-3
 - command prompt, stopping service from, 22-5
 - configuring accounts, 3-2
 - database tables, 19-3
 - features, 1-3
 - mail server, 1-9
 - managed product, 5-2
 - manually removing, 22-3
 - MCP, 1-10
 - notifications, 10-12
 - removing manually, 22-3
 - report server, 1-9
 - SQL database, 1-9
 - Trend Micro Management Infrastructure, 1-10
 - version feature comparison, A-9
 - web-based management console, 1-10
 - web server, 1-9
 - widget framework, 1-11
- Control Manager antivirus and content security components
 - Anti-spam rules, 7-2

- Engines, 7-2
- Pattern files/Cleanup templates, 7-2
- copying policy settings, 17-14
- CPU usage, E-29, E-78, E-94, E-135, E-156
- creating
 - auditing logs, 18-7
 - folders, 14-16
 - user groups, 3-27
 - users, 3-17
- creating policies, 17-8, 17-14
 - centrally managed, 17-13
 - copying settings, 17-14
 - setting permissions, 17-13
 - settings, 17-9
 - targets, 17-9
- criteria
 - customized expressions, 17-22
 - keywords, 17-29, 17-30
- custom detections
 - Allow List, E-2
 - creating, E-3
 - importing/exporting, E-4
 - Deny List, E-2
 - creating custom list, E-2
 - importing/exporting, E-4
- customized expressions, 17-22, 17-25
 - criteria, 17-22
 - importing, 17-25
- customized keywords, 17-29
 - criteria, 17-29, 17-30
 - importing, 17-32
- customized templates, 17-34
 - creating, 17-35
 - importing, 17-36

D

- dashboard

- using, 8-2
- database tables, 19-3
- data identifiers, 17-20
 - expressions, 17-20
 - file attributes, 17-20
 - keywords, 17-20
- Data Loss Prevention, 17-20
 - actions, E-119
 - data identifiers, 17-20
 - decompression rules, E-124
 - DLP Compliance Officer, 18-5
 - DLP Incident Reviewer, 18-5
 - expressions, 17-21, 17-22, 17-25
 - file attributes, 17-25–17-27
 - Incident Information list, 18-8
 - incident investigation, 18-1, 18-7
 - administrator tasks, 18-2
 - auditing logs, 18-7
 - DLP Compliance Officer, 18-5
 - DLP Incident Reviewer, 18-5
 - exporting incident details, 18-8
 - notifications, 18-6
 - keywords, 17-27–17-30, 17-32
 - network channels, E-116, E-117, E-121–E-123
 - policies, E-127
 - creating, E-127
 - system and application channels, E-118
 - templates, 17-33–17-36
- Data Loss Prevention (DLP), 17-20
- data views
 - product information, B-3
 - security threat information, B-18
 - understand, 11-6
- DBConfig tool, 21-3
- decompression rules, E-124

- deleting
 - logs, 11-26
 - user accounts, 3-25
 - user groups, 3-29
- deleting managed servers, 6-5
- deleting policies, 17-16
- Deny List, E-2
 - creating custom list, E-2
 - importing/exporting, E-4
- deploying policies, 17-10
- deployment plans, 7-23
- device control, E-19, E-21–E-24
 - advanced permissions, E-21
 - configuring, E-21
 - approved list, E-24
 - Digital Signature Provider, E-24
 - permissions, E-19, E-22–E-24
 - program path and name, E-24
 - storage devices, E-19, E-22, E-23
 - USB devices, E-24
- Device List Tool, E-25, E-119
- devices
 - lock, E-191
- digital signature cache, E-54
- Digital Signature Pattern, E-54
- Digital Signature Provider, E-24
 - specifying, E-24
- Directory Management options, 14-14
- Directory Manager, 5-3, 14-13
 - grouping managed products, 5-3
- disable notifications, 10-11
- disabling
 - user accounts, 3-24
- DLP, 17-20
- DLP Incident Reviewer, 18-7
 - Incident Information list, 18-8

- download components
 - manually, 7-4
- downloading and deploying components, 7-2
- draft policies, 17-4, 17-9
- DSP, E-24

E

- editing
 - Outbreak Prevention policies, 20-13
 - user accounts, 3-23
 - user groups, 3-29
- editing managed servers, 6-5
- editing policies, 17-15
- email, 10-12
- email domains, E-117
- enable notifications, 10-11
- encryption
 - keys
 - shared, E-188
- encryption and password
 - encryption algorithms, E-201
 - file types, E-201
 - PIM information, E-201
 - power-on password policies, E-199
 - trusted application list, E-202
- Enterprise Protection Strategy, 20-3
- evaluating existing policies, 20-19
- Event Center, 10-2
- Event Monitoring, E-16
- exporting
 - DLP incident details, 18-8
- expressions, 17-20, 17-21
 - customized, 17-22, 17-25
 - criteria, 17-22
 - predefined, 17-21

F

FakeAV, E-39, E-72, E-88, E-106

features, 1-3

file attributes, 17-20, 17-25–17-27

- creating, 17-26

- importing, 17-27

- wildcards, 17-26

File Encryption

- shared key, E-188

file reputation, 1-11

filter by criteria, 17-9

filtered policies, 17-4

- reordering, 17-4, 17-17

firewall

- privileges, E-45

firewall policy

- exception rule settings, E-211

- IDS, E-210

- security levels, E-211

- SYN Flood attack, E-211

firewall traversal support, 1-6

folders

- creating, 14-16

- renaming, 14-17

G

General Policy

- Blackberry settings, E-195

- log settings, E-195

- notification/report settings, E-195

- uninstall protection features, E-194

- update settings, E-194

I

icons

- connection status, 13-4

incident details updated notification, 18-6

incident details updated notifications

- configure, 10-26

Incident Information list, 18-8

IntelliScan, E-27, E-59, E-76, E-92, E-154

investigating DLP incidents, 18-1, 18-7

- administrator tasks, 18-2

- auditing logs, 18-7

- DLP Compliance Officer, 18-5

- DLP Incident Reviewer, 18-5

- exporting incident details, 18-8

- Incident Information list, 18-8

- notifications, 18-6

IPv6 support, C-1

- limitations, E-165, E-173

K

keywords, 17-20, 17-27

- customized, 17-29, 17-30, 17-32

- predefined, 17-28

L

LDAP Proxy, E-176

license information, 15-7

license management, 15-2

locally managed, 17-14

logical operators, 17-34

Log on as batch job policy, 7-31

log queries

- shared, 11-25

logs, 11-2

- Ad Hoc Queries, 11-11

- configure log aggregation, 11-4

- deleting, 11-26

- firewall logs, E-46

- querying, 11-5

M

mail scan, E-46

Malware Protection Policy

- scan options, E-214

- scan types, E-214

managed products

- activating, 15-2

- configuring, 14-4

- issue tasks, 14-5

- recovering, 14-10

- registering, 15-2

- renaming, 14-17

- searching for, 14-11

- viewing logs, 14-6

managed server list, 6-10

- adding servers, 6-3

- configuring proxy settings, 6-6

- deleting servers, 6-5

- editing servers, 6-5

managed servers, 6-1

management console, 2-2

- access, 2-4

- function-locking mechanism, 2-4

manually

- removing Control Manager, 22-3

manually download components, 7-4

manually uninstalling, 22-3

MCP, 1-10

- understand, 1-5

MCP benefits

- HTTPS support, 1-7

- NAT and firewall traversal, 1-6

- reduced network loading and package size, 1-5

MIB file

- Control Manager, 21-2

- NVW Enforcer SNMPv2, 21-3

MIBs browser, 10-13

modifying

- account types, 3-13

- monitored email domains, E-117

- monitored system events, E-16

- monitored targets, E-122, E-124

- my account, 3-25

- my reports, 12-45

N

- NAT traversal support, 1-6

- network channels, E-116, E-117, E-121–E-123

- email clients, E-117

- monitored targets, E-121

- non-monitored targets, E-121

- transmission scope

- all transmissions, E-122

- external transmissions, E-123

- transmission scope and targets, E-116

network virus alerts

- configure, 10-21

- non-monitored email domains, E-117

- non-monitored targets, E-122, E-124

- notifications, 10-12

- C&C callback alert settings, 10-19

- C&C callback detections, E-46

- C&C callback outbreak alert settings, 10-19

- configure recipients, 10-16

- configuring, 10-12

- enabling or disabling, 10-11

- for agent users, E-57

- incident details updated, 18-6

- network virus alert settings, 10-18

- potential vulnerability attack alert settings, 10-19

- scheduled incident summary, 18-6

- special virus alert settings, 10-18

- spyware/grayware detection, E-73, E-107
- spyware/grayware special alert settings, 10-18
- test notification delivery, 10-16
- virus/malware detection, E-69, E-103
- virus outbreak alert settings, 10-18
- web threat detection, E-51

O

ODBC

- settings, Control Manager, 22-9

OfficeScan agent

- files, E-52
- processes, E-53
- registry keys, E-53

on-demand scan cache, E-55

one-time reports, 12-30

one-way communication, 1-8

Outbreak Prevention Mode, 20-8

- configuring download settings, 20-16
- setting automatic, 20-14
- starting, 20-12
- stopping, 20-17
- viewing history, 20-17

Outbreak Prevention policies

- editing, 20-13

policies

- Outbreak Prevention, 20-9

Outbreak Prevention Services, 20-5

- accessing, 20-10
- activating, 20-6
- benefits, 20-6
- viewing status, 20-7

outbreaks

- identify the source, 20-19

P

pager, 10-13

parent servers, 16-2

PCRE, 17-22

pending targets, 17-7

performance control, E-29, E-78, E-94, E-135, E-156

Perl Compatible Regular Expressions, 17-22

permissions

- advanced, E-21
- program path and name, E-24
- storage devices, E-19

policies, E-180

- common, E-188
- creating, 17-8
- deleting, 17-16
- deploying, 17-10
- editing, 17-15
- File Encryption, E-185
- Full Disk Encryption, E-183
- policy mapping, E-176
- reordering, 17-17
- user, E-182

policy list, 17-5, 17-6

policy management, 17-1, 17-2

- centrally managed, 17-13
- copying policy settings, 17-14
- creating policies, 17-8
- deleting policies, 17-16
- deploying policies, 17-10
- DLP, 17-20
- draft policies, 17-4, 17-9
- editing policies, 17-15
- filtered policies, 17-4
- locally managed, 17-14
- pending targets, 17-7

- policy list, 17-5, 17-6
- policy priority, 17-4, 17-7
- reordering policies, 17-4, 17-17
- setting permissions, 17-13
- settings, 17-9
- specified policies, 17-4
- targets, 17-7, 17-9
- understanding, 17-2
- upgrading policy templates, 17-18
- policy mapping
 - Control Manager, E-176
 - PolicyServer, E-176
- policy priority, 17-7
- PolicyServer
 - AD synchronization, E-176
- policy settings
 - copying, 17-14
- policy targets, 17-7
- policy templates, 17-18
- policy types
 - draft, 17-4, 17-9
 - filtered, 17-4
 - policy priority, 17-7
 - reordering policies, 17-17
 - specified, 17-4
- port
 - checklist, A-3
- predefined expressions, 17-21
 - viewing, 17-21
- predefined keywords
 - distance, 17-28
 - number of keywords, 17-28
- predefined templates, 17-33
- preface, xi
- privileges
 - firewall privileges, E-45

- mail scan privileges, E-46
- proxy configuration privileges, E-47
- roaming privilege, E-42
- scan privileges, E-43
- Scheduled Scan privileges, E-43
- unload privilege, E-50
- Product Directory
 - deploying components, 14-2
- proxy settings
 - managed server list, 6-6
 - privileges, E-47

Q

- quarantine directory, E-37, E-69, E-86, E-103
- querying commands, 9-4
- query logs, 11-5

R

- recovering
 - managed products, 14-10
- Recovery Console, E-185
 - functions, E-185
- registering
 - child servers, 16-3, 16-4
 - managed products, 15-2
- remove
 - manual
 - Microsoft Data Engine, 22-9
- removing
 - Control Manager manually, 22-3
 - manual
 - Control Manager, 22-3
- renaming
 - folders, 14-17
 - managed products, 14-17
- reordering policies, 17-17
- report maintenance, 12-44

reports

- create report templates, 12-15
- deleting, 12-44
- my reports, 12-45
- one-time reports, 12-30
- scheduled reports, 12-36
- templates, 12-2
- viewing child server reports, 16-12
- viewing reports, 12-43
- report templates, 12-2
- re-verification frequency
 - changing, 14-11
- reviewing DLP incidents, 18-7
 - Incident Information list, 18-8

S

- scan actions
 - spyware/grayware, E-40, E-72, E-89, E-106
- scan cache, E-54
- scan criteria
 - CPU usage, E-29, E-78, E-94, E-135, E-156
 - file compression, E-27, E-60, E-77, E-93
 - files to scan, E-26, E-59, E-75, E-92, E-154
 - schedule, E-91, E-154
 - user activity on files, E-58, E-141
- scan exclusions, E-29, E-30, E-61, E-62, E-78, E-79, E-95
 - directories, E-31, E-63, E-80, E-96
 - file extensions, E-33, E-65, E-82, E-98
 - files, E-32, E-64, E-81, E-98
- schedule bar, 13-11
- Scheduled Download
 - configuring
 - automatic deployment settings, 7-22
- Scheduled Download Exceptions
 - configuring, 7-11
- Scheduled Download Frequency
 - configuring, 7-19
- Scheduled Downloads, 7-12
- Scheduled Download Schedule
 - configuring, 7-19
- Scheduled Download Schedule and Frequency, 7-19
- Scheduled Download Settings
 - configuring settings, 7-20
- scheduled incident summary notification, 18-6
- scheduled incident summary notifications
 - configure, 10-25
- scheduled reports, 12-36
- Scheduled Scan
 - skip and stop, E-45
- searching
 - managed products, 14-11
- selecting targets, 17-9
 - filter by criteria, 17-9
 - specify targets, 17-9
- send email alert, E-197
- server
 - address checklist, A-2
- server address checklist, A-2
- setting
 - access rights, 3-15
- setting permissions, 17-13
- settings
 - widget, 8-10
- shared log queries, 11-25
- showing permissions, 17-13
- significant incident increase notifications
 - configure, 10-24
- Small Network Management Protocol
 - See SNMP, 10-13

- smart protection, 1-11, 1-12
 - File Reputation Services, 1-11
 - Smart Protection Network, 1-11
 - Web Reputation Services, 1-12
- Smart Protection Network, 1-11
- Smart Protection Network tab, 8-7
- SNMP, 10-13
- spam
 - SMS, E-215
 - filtering list configuration, E-216
 - filtering list format, E-217
 - WAP-Push, E-217
 - approved list format, E-217
- special spyware/grayware alerts
 - configure, 10-20
- special virus alerts
 - configure, 10-20
- specified policies, 17-4
 - priority, 17-4
- specify targets, 17-9
 - browsing, 17-12
- spyware/grayware scan
 - actions, E-40, E-72, E-89, E-106
- SSO, 1-8
- starting
 - Outbreak Prevention Mode, 20-12
- stopping
 - Outbreak Prevention Mode, 20-17
- stopping cloud services management
 - managed servers, 6-10
- storage devices
 - advanced permissions, E-22, E-23
 - permissions, E-19
- summary tab, 8-3
- system and application channels, E-118

T

- tabs
 - compliance, 8-5
 - Smart Protection Network, 8-7
 - summary, 8-3
 - threat detection, 8-6
 - understand, 8-2
- targets, 17-7, 17-9
 - browsing, 17-12
 - filter by criteria, 17-9
 - pending, 17-7
 - specify targets, 17-9
- templates, 17-33–17-36
 - condition statements, 17-34
 - customized, 17-34–17-36
 - logical operators, 17-34
 - predefined, 17-33
- threat detection tab, 8-6
- tool
 - NVW Enforcer SNMPv2 MIB file, 21-3
- tools
 - Agent Migration tool, 21-2
 - Control Manager MIB file, 21-2
 - DBConfig tool, 21-3
- traversal support
 - NAT and firewall, 1-6
- Trend Micro services
 - understand, 20-2
- Trigger Application, 10-13
- two-way communication, 1-8

U

- understand
 - data views, 11-6
 - deployment plans, 7-23
 - Event Center, 10-2
 - license information, 15-7

- license management, 15-2
- log queries, 11-5
- logs, 11-2
- MCP, 1-5
- Trend Micro services, 20-2
- user accounts, 3-15
- user groups, 3-26
- widgets, 8-9
- uninstallation
 - using the uninstallation program, E-50
- unregister
 - child server, 16-6
- unregistering
 - child servers, 16-3
- Update Now, E-49
- upgrading policy templates, 17-18
- USB devices
 - approved list, E-24
 - configuring, E-24
- user account
 - access, 3-4–3-10
- user accounts
 - adding, 3-17
 - deleting, 3-25
 - disabling, 3-24
 - editing, 3-23
 - understanding, 3-15
- user groups
 - adding, 3-27
 - deleting, 3-29
 - editing, 3-29
 - understanding, 3-26
- user roles
 - adding, 3-10
- users
 - adding, E-176

- adding accounts, 3-17
- adding groups, 3-27
- deleting accounts, 3-25
- deleting groups, 3-29
- disabling accounts, 3-24
- editing accounts, 3-23
- editing groups, 3-29
- lockout, E-191

V

- viewing
 - managed products logs, 14-6
 - Outbreak Prevention Mode history, 20-17
 - Outbreak Prevention Services status, 20-7
- viewing commands, 9-4
- virus outbreak alerts
 - configure, 10-19, 10-23

W

- web console, 2-2
- web reputation, 1-12
- Web threat
 - filtering list configuration, E-222
 - filtering list format, E-223, E-224
 - limited adult content, E-224
 - specific Web site only, E-224
- widget
 - settings, 8-10
- widgets
 - understanding, 8-9
- wildcards, 17-26
 - file attributes, 17-26
- Windows event log, 10-12



TREND MICRO INCORPORATED

10101 North De Anza Blvd. Cupertino, CA., 95014, USA

Tel: +1(408)257-1500 / 1-800 228-5651 Fax: +1(408)257-2003 info@trendmicro.com

www.trendmicro.com

Item Code: CMEM66343/140310