



9.3 TREND MICRO[™] Mobile Security[™]

Administrator's Guide

Comprehensive security for enterprise handhelds



Endpoint Security

Trend Micro Incorporated reserves the right to make changes to this document and to the products described herein without notice. Before installing and using the product, please review the readme files, release notes, and the latest version of the applicable user documentation, which are available from the Trend Micro website at:

<http://docs.trendmicro.com>

Trend Micro, the Trend Micro t-ball logo, OfficeScan, and TrendLabs are trademarks or registered trademarks of Trend Micro Incorporated. All other product or company names may be trademarks or registered trademarks of their owners.

Copyright © 2015. Trend Micro Incorporated. All rights reserved.

Document Part No. TSEM97009_150623

Release Date: June 2015

The user documentation for Trend Micro™ Mobile Security 9.3 for Enterprise introduces the main features of the product and provides installation instructions for your production environment. Read through the documentation before installing or using the product.

Detailed information about how to use specific features within the product is available in the Online Help and the Knowledge Base at the Trend Micro website.

Trend Micro always seeks to improve its documentation. If you have questions, comments, or suggestions about this or any Trend Micro document, please contact us at docs@trendmicro.com.

Please evaluate this documentation on the following site:

<http://www.trendmicro.com/download/documentation/rating.asp>

Table of Contents

Preface

Preface	vii
Audience	viii
Mobile Security Documentation	viii
Document Conventions	ix

Chapter 1: Introduction

Understanding Mobile Threats	1-2
About Trend Micro Mobile Security v9.3	1-2
Architecture of Mobile Security System	1-2
Components of Mobile Security System	1-3
Comparison Between Local and Communication Servers	1-6
What's New in this Release (9.3)	1-6
What's New in Release 9.2	1-7
What's New in Release 9.1	1-9
What's New in Release 9.0 SP2	1-10
What's New in Release 9.0 SP1	1-12
What's New in Release 9.0	1-13
What's New in Release 8.0 SP1	1-15
What's New in Release 8.0	1-15
What's New in Release 7.1	1-17
What's New in Release 7.0	1-18
Main Mobile Device Agent Features	1-19
Supported Mobile Device OS Features	1-21

Chapter 2: Getting Started with Mobile Security

Administration Web Console	2-2
Accessing the Administration Web Console	2-2
Turning Off Compatibility Mode in Internet Explorer	2-4
Product License	2-4
Dashboard Information	2-5
Customizing the Dashboard	2-7
Administration Settings	2-10
Configuring Active Directory (AD) Settings	2-10
Configuring User Authentication	2-10
Configuring Database Settings	2-10
Configuring Communication Server Settings	2-10
Managing Administrator Accounts	2-10
Command Queue Management	2-18
Configuring Schedule for Deleting Old Commands	2-19
Deleting Old Commands Manually	2-19
Exchange Server Integration	2-20
Configuring Exchange Server Integration Settings	2-20
Configuring Exchange Connector	2-20
Managing Certificates	2-21
Uploading a Certificate	2-21
Deleting Certificate	2-21

Chapter 3: Managing Mobile Devices

Managed Devices Tab	3-3
Groups in Mobile Security	3-3
Managing Groups	3-4
Managing Mobile Devices	3-5
Mobile Device Status	3-10
Mobile Device Agent Tasks	3-13
Updating Mobile Device Agents	3-13
Lost Device Protection	3-13
Resetting Password Remotely	3-17
Managing Samsung KNOX Workspace Remotely	3-18

Modifying iOS Settings Remotely	3-19
Exporting Data	3-20
Sending Messages to Mobile Devices	3-20
Invited Devices Tab	3-21
Viewing the Invitation List	3-22
Resending Invitation Messages	3-23
Canceling Active Invitations	3-23
Remove Invitations from the List	3-23
Exchange ActiveSync Devices Tab	3-24
Inviting Exchange ActiveSync Mobile Devices	3-24
Allowing or Blocking Access to Exchange Server	3-25
Wiping a Remote ActiveSync Mobile Device	3-26
Removing an ActiveSync Mobile Device	3-26
Device Enrollment Program Tab	3-27
Device Enrollment Program User Experience	3-28
Setting Up Mobile Security for the Device Enrollment Program	3-28
Integration with Trend Micro Control Manager	3-30
Creating Security Policies in Control Manager	3-31
Deleting or Modifying Security Policies	3-31
Security Policy Statuses on Control Manager	3-31

Chapter 4: Protecting Devices with Policies

About Security Policies	4-3
Managing Policies	4-4
Creating a Policy	4-5
Editing a Policy	4-5
Assigning or Removing Policy from a Group	4-6
Copying a Policy	4-6
Deleting Policies	4-7
Configuring Application Availability	4-7
Security Policies in Mobile Security	4-8
Common Policy	4-8
Wi-Fi Policy	4-9
Exchange ActiveSync Policy	4-9
VPN Policy	4-10

Global HTTP Proxy Policy	4-10
Certificate Policy	4-10
Single Sign-On Policy	4-10
AirPlay/AirPrint Policy	4-11
Cellular Network Policy	4-12
Theme Policy	4-12
Managed Domain Policy	4-12
Malware Protection Policy	4-13
Spam Prevention Policy	4-14
Call Filtering Policy	4-16
Web Threat Protection Policy	4-18
Privacy Protection Policy	4-19
Password Policy	4-19
Feature Lock Policy	4-19
Compliance Policy	4-20
Application Monitor and Control Policy	4-20
Volume Purchasing Program Policy	4-22
Container Policy	4-23

Chapter 5: Managing Enterprise App Store

About Enterprise App Store	5-2
Managing Enterprise Applications	5-2
Adding an Application	5-2
Editing Application Information	5-4
Deleting Applications from the App Store	5-4
Managing Application Categories	5-5
Adding an Application Category	5-5
Editing an Application Category	5-5
Deleting an Application Category	5-6
Managing Apps Purchased through the Volume Purchase Program	5-6
Setting Up Volume Purchase Program Licenses	5-7
Assigning VPP Applications to Users	5-8
Reclaiming Volume Purchase Program Applications	5-9
Checking Status for VPP Users	5-9
Reclaiming All Licences from a User	5-10

Chapter 6: Updating Components

About Component Updates	6-2
Updating Mobile Security Components	6-2
Manual Update	6-2
Scheduled Update	6-3
Specifying a Download Source	6-5
Manually Updating a local AU server	6-6

Chapter 7: Viewing and Maintaining Logs

About Mobile Device Agent Logs	7-2
Viewing Mobile Device Agent Logs	7-2
Log Maintenance	7-4
Scheduling Log Deleting	7-4
Deleting Logs Manually	7-4

Chapter 8: Using Notifications and Reports

About Notification Messages and Reports	8-2
Configuring Notification Settings	8-2
Configuring Email Notifications	8-2
Administrator Notifications and Scheduled Reports	8-3
Configuring Administrator Notifications	8-4
User Notification	8-5
Configuring User Notifications	8-5

Chapter 9: Troubleshooting and Contacting Technical Support

Troubleshooting	9-2
Before Contacting Technical Support	9-5
Contacting Technical Support	9-5
Sending Infected Files to Trend Micro	9-6
TrendLabs	9-6

About Software Updates	9-7
Known Issues	9-8
Other Useful Resources	9-8
About Trend Micro	9-8

Index

Index	IN-1
-------------	------

Preface

Preface

Welcome to the Trend Micro™ Mobile Security for Enterprise version 9.3 Administrator's Guide. This guide provides detailed information about all Mobile Security configuration options. Topics include how to update your software to keep protection current against the latest security risks, how to configure and use policies to support your security objectives, configuring scanning, synchronizing policies on mobile devices, and using logs and reports.

This preface discusses the following topics:

- *Audience on page viii*
- *Mobile Security Documentation on page viii*
- *Document Conventions on page ix*

Audience

The Mobile Security documentation is intended for both administrators—who are responsible for administering and managing Mobile Device Agents in enterprise environments—and mobile device users.

Administrators should have an intermediate to advanced knowledge of Windows system administration and mobile device policies, including:

- Installing and configuring Windows servers
- Installing software on Windows servers
- Configuring and managing mobile devices
- Network concepts (such as IP address, netmask, topology, and LAN settings)
- Various network topologies
- Network devices and their administration
- Network configurations (such as the use of VLAN, HTTP, and HTTPS)

Mobile Security Documentation

The Mobile Security documentation consists of the following:

- *Installation and Deployment Guide*—this guide helps you get “up and running” by introducing Mobile Security, and assisting with network planning and installation.
- *Administrator’s Guide*—this guide provides detailed Mobile Security configuration policies and technologies.
- *Online help*—the purpose of online help is to provide “how to’s” for the main product tasks, usage advice, and field-specific information such as valid parameter ranges and optimal values.
- *Readme*—the Readme contains late-breaking product information that is not found in the online or printed documentation. Topics include a description of new features, installation tips, known issues, and release history.

- *Knowledge Base*— the Knowledge Base is an online database of problem-solving and troubleshooting information. It provides the latest information about known product issues. To access the Knowledge Base, open:

<http://esupport.trendmicro.com/>



Tip

Trend Micro recommends checking the corresponding link from the Download Center (<http://www.trendmicro.com/download>) for updates to the product documentation.

Document Conventions

The documentation uses the following conventions.

TABLE 1. Document Conventions

CONVENTION	DESCRIPTION
UPPER CASE	Acronyms, abbreviations, and names of certain commands and keys on the keyboard
Bold	Menus and menu commands, command buttons, tabs, and options
<i>Italics</i>	References to other documents
Monospace	Sample command lines, program code, web URLs, file names, and program output
Navigation > Path	The navigation path to reach a particular screen For example, File > Save means, click File and then click Save on the interface
 Note	Configuration notes
 Tip	Recommendations or suggestions

CONVENTION	DESCRIPTION
 Important	Information regarding required or default configuration settings and product limitations
 WARNING!	Critical actions and configuration options

Chapter 1

Introduction

Trend Micro™ Mobile Security for Enterprise v9.3 is an integrated security solution for your mobile devices. Read this chapter to understand Mobile Security components, features and how they protect your mobile devices.

This chapter includes the following sections:

- *Understanding Mobile Threats on page 1-2*
- *About Trend Micro Mobile Security v9.3 on page 1-2*
- *Architecture of Mobile Security System on page 1-2*
- *Components of Mobile Security System on page 1-3*
- *What's New in Release 9.1 on page 1-9*
- *Main Mobile Device Agent Features on page 1-19*
- *Supported Mobile Device OS Features on page 1-21*

Understanding Mobile Threats

With the standardization of platforms and their increasing connectivity, mobile devices are susceptible to an increasing number of threats. The number of malware programs that run on mobile platforms is growing and more spam messages are sent through SMS. New sources of content, such as WAP and WAP-Push are also used to deliver unwanted material.

Additionally, the theft of mobile devices may lead to the compromise of personal or sensitive data.

About Trend Micro Mobile Security v9.3

Trend Micro™ Mobile Security for Enterprise is a comprehensive security solution for your mobile devices. Mobile Security incorporates the Trend Micro anti-malware technologies to effectively defend against the latest threats to mobile devices.

The integrated filtering functions enable Mobile Security to block unwanted network communication to mobile devices. Some of these unwanted network communications include: SMS messages, WAP push mails and data received through 3G/GPRS connections.

This version of Mobile Security is independent of OfficeScan™ and can be installed separately as a standalone application on a Windows computer.



WARNING!

Trend Micro cannot guarantee compatibility between Mobile Security and file system encryption software. Software products that offer similar features, like anti-malware scanning and SMS management may be incompatible with Mobile Security.

Architecture of Mobile Security System

Depending on your company needs, you can implement Mobile Security with different client-server communication methods. You can also choose to set up one or any combination of client-server communication methods in your network.

Trend Micro Mobile Security supports three different models of deployment:

- Enhanced Security Model (Dual Server Installation) with Cloud Communication Server
- Enhanced Security Model (Dual Server Installation) with Local Communication Server
- Basic Security Model (Single Server Installation)

Refer to the *Installation and Deployment Guide* for the details.

Components of Mobile Security System

The following table provides the descriptions of the Mobile Security components.

TABLE 1-1. Components of Mobile Security System

COMPONENT	DESCRIPTION	REQUIRED OR OPTIONAL
Management Server	The Management Server enables you to manage Mobile Device Agents from the administration Web console. Once mobile devices are enrolled to the server, you can configure Mobile Device Agent policies and perform updates.	Required

COMPONENT	DESCRIPTION	REQUIRED OR OPTIONAL
Communication Server	<p>The Communication Server handles communications between the Management Server and Mobile Device Agents.</p> <p>Trend Micro Mobile Security provides two types of Communication Server:</p> <ul style="list-style-type: none"> • Local Communication Server (LCS)—this is a Communication Server deployed locally in your network. • Cloud Communication Server (CCS)—this is a Communication Server deployed in the cloud and you will not need to install this server. Trend Micro manages the Cloud Communication Server and you only need to connect to it from the Management Server. <p>See Comparison Between Local and Communication Servers on page 1-6.</p>	Required
Exchange Connector	<p>Trend Micro Mobile Security uses Exchange Connector to communicate with the Microsoft Exchange server, detects all the mobile devices that use Exchange ActiveSync service, and displays them on Mobile Security Web console.</p> <p>The Microsoft Exchange server Integration with Mobile Security enables the administrators to monitor the mobile devices that access the Microsoft Exchange server. Once the feature is enabled and configured, Mobile Security administrators can perform Remote Wipe and block the access to the Microsoft Exchange server for such mobile devices.</p> <p>The integration of Microsoft Exchange server with Mobile Security also enables the administrators to control the user access to cooperate data (such as, emails, calendar, contacts, and so on).</p>	Optional

COMPONENT	DESCRIPTION	REQUIRED OR OPTIONAL
Mobile Device Agent (MDA)	The Mobile Device Agent is installed on the managed Android and iOS mobile devices. The agent communicates with the Mobile Security Communication Server and executes the commands and policy settings on the mobile device.	Required
Microsoft SQL Server	The Microsoft SQL Server hosts the databases for Mobile Security Management Server.	Required
Active Directory	The Mobile Security Management Server imports users and groups from the Active Directory.	Optional
Certificate Authority	The Certificate Authority manages security credentials and public and private keys for secure communication.	Optional
SCEP	<p>The Simple Certificate Enrollment Protocol (SCEP) is a communication protocol that provides a networked front end to a private certificate authority.</p> <p>In some environments, it is important to make sure that corporate settings and policies are protected from prying eyes. To provide this protection, iOS allows you to encrypt profiles so that they can be read only by a single device. An encrypted profile is just like a normal configuration profile except that the configuration profile payload is encrypted with the public key associated with the device's X.509 identity.</p> <p>The SCEP works with the Certificate Authority to issue certificates in large enterprises. It handles the issuing and revocation of digital certificates. The SCEP and Certificate Authority can be installed on the same server.</p>	Optional
APNs Certificate	The Mobile Security Communication Server communicates through the Apple Push Notification Service (APNs) to iOS devices.	Required if you want to manage iOS mobile devices

COMPONENT	DESCRIPTION	REQUIRED OR OPTIONAL
SSL certificate	Trend Micro Mobile Security requires an SSL server certificate issued from a recognized Public Certificate Authority for the secure communication between mobile devices and Communication Server using HTTPS.	Required if you want to manage Windows Phone or iOS mobile devices
SMTP Server	Connect SMTP server to make sure administrators can get reports from Mobile Security Management Server, and send invitations to users.	Optional

Comparison Between Local and Communication Servers

The following table provides the comparison between the Local Communication Server (LCS) and the Cloud Communication Server (CCS).

TABLE 1-2. Comparison between Local and Cloud Communication Servers

FEATURES	CLOUD COMMUNICATION SERVER	LOCAL COMMUNICATION SERVER
Installation required	No	Yes
User authentication method supported	Enrollment Key	Active Directory or Enrollment Key
Agent Customization for Android	Supported	Supported
Manage Windows Phone	Not supported	Supported

Whats New in this Release (9.3)

The following new features are available in Trend Micro Mobile Security v9.3:

FEATURE NAME	DESCRIPTION
Mobile Device Agent available on Google Play	From this release, users can download Android mobile device agent from Google Play store.
Facebook Scan for Android and iOS	Scans your Facebook privacy settings, and provides recommendations on adjusting them to increase your privacy.
Security Scan for iOS	Scans every app you have installed to filter out viruses, malicious apps, and spyware that can steal your information and cost you money.
Scan from Cloud	Improves scanning from the cloud on Android mobile devices, when the mobile devices use a proxy server.
Location Awareness for Android Feature Lock	Enables you to enforce the feature lock policy when the mobile device is in the range of an access point; and then restores the feature settings when the user leaves the range.
Added SMS Sender Support	Added support for SMS Sender to send notification text messages to users.

What's New in Release 9.2

The following new features are available in Trend Micro Mobile Security v9.2:

FEATURE NAME	DESCRIPTION
Central Management for Privacy Scan	Enables administrators to allow users to perform manual scan and force mobile devices to upload privacy logs to server.
Templates for Group Administrators	Enables Super Administrator to change a policy to a template, and allows group administrators to use these templates to create policies for their assigned groups.
Locate iOS Mobile Devices	Includes support to locate iOS mobile devices.

FEATURE NAME	DESCRIPTION
Security Risk Evaluation for Applications from Google Play	Performs a security risk and resource usage evaluation using Mobile Application Reputation Service (MARS) before adding an application from an external application store (Google Play).
Real-time Email Notification	Adds a real-time email notification to alert administrator about the detected malware on an Android mobile device.
APNs Certificate Expiry Notification	Adds a Dashboard notification to alert administrator about the APNs certificate expiry in advance.
Message Broadcast	Enables you to broadcast a text message to Android and iOS mobile devices in a group.
Improved Usability for Application Monitor & Control Policy	Enables you to import application list in Application Monitor & Control Policy.
Unregistration for Mobile Device Agent	Includes an option in Android and iOS mobile devices to unregister the mobile device agent from the server.
SQL Server Express 2008	Includes SQL Server Express 2008 with Mobile Security installation package.

FEATURE NAME	DESCRIPTION
Apple iOS Management Features Enhancement	<p>Includes the following enhancements:</p> <ul style="list-style-type: none"> Includes support for Apple's Device Enrollment Program (DEP) and Volume Purchase Program (VPP). Displays additional information on administration Web console for iOS 8 or above mobile devices. Enables you to include a custom text message while sending a command to lock a mobile device. Enables you to configure managed domains. Enables you to initiate and terminate AirPlay mirroring for mobile devices. Enables you to push new fonts to mobile devices. Enables you to modify the device name for mobile devices. New feature lock options added for iOS 8 or above mobile devices.
Removed BlackBerry Support	The support for BlackBerry mobile devices is removed in this version.
Removed SMS Sender Support	The support for SMS Sender is removed in this version.

What's New in Release 9.1

The following new features are available in Trend Micro Mobile Security v9.1:

FEATURE NAME	DESCRIPTION
Password Protection for System Settings	Provides password protection for system settings on Android mobile devices.

FEATURE NAME	DESCRIPTION
Enhanced Device Information	Includes more details about client mobile devices on Administration Web console and on the mobile device. Also, the exported CSV file includes "Last Connection Time" information for client mobile devices.
Enhanced Advanced Search	Includes more search attributes to improve Advanced Search.
Enterprise App Store Enhancement	The following enhancements are made in the Enterprise App Store in Trend Micro Mobile Security: <ul style="list-style-type: none"> Enables you to update apps that are installed on mobile devices. Differentiates between iOS apps for iPhone iPad and iPod.
Enhanced Logs Export	Enables you to export all of the logs.
Event Log Timestamp	Displays mobile device event log timestamp in both server and mobile device's local time zone.
Improved Enrollment Process	Enables you to configured Cloud Communication Server enrollment information in Android APK file in advance for easy enrollment.
Sub-groups in Device Tree	Enables administrators to create sub-groups in Device tree.

What's New in Release 9.0 SP2

The following new features are available in Trend Micro Mobile Security v9.0 SP2:

FEATURE NAME	DESCRIPTION
Windows Phone Support	Adds support for Windows Phone.
Samsung KNOX Workspace Management	Adds support for Samsung KNOX workspace.

FEATURE NAME	DESCRIPTION
Apple iOS Management Features Enhancement	<p>The following enhancements are made in this release:</p> <ul style="list-style-type: none"> • The administration Web console displays additional information for iOS 7 or above mobile devices. • More commands are included for iOS mobile device management. • AirPlay and AirPrint policy provisioning is added in this release. • Cellular policy is added to configure APN settings on iOS mobile devices. • Themes are added to set wallpapers on iOS mobile devices. • New feature lock options added for iOS 7 or above mobile devices.
Removed Windows Mobile and Symbian support	The support for Windows Mobile and Symbian is removed in this version.
Enterprise App Store Enhancement	<p>The following enhancements are made in the Enterprise App Store in Trend Micro Mobile Security:</p> <ul style="list-style-type: none"> • Displays hot apps on the Enterprise App store and the installed apps on mobile device. • Improved application search on the app store • Allows administrators to set specific applications as invisible for specific policies.
Improved Command Queue Management	Enables administrators to purge command queue manually or on a pre-determined schedule.
Improved Mobile Device Agent Tasks	Provides option to selective wipe rooted or jailbroken mobile devices.
Improved Mobile Device Status Display	When the mobile device status changes to Inactive, the mobile device status screen displays the reason of the change in the status.

What's New in Release 9.0 SP1

The following new features are available in Trend Micro Mobile Security v9.0 SP1:

FEATURE NAME	DESCRIPTION
Integration with Control Manager	<p>Complete integration with Trend Micro Control Manager.</p> <ul style="list-style-type: none"> This version enables uploading the status log, user information, and the mobile device information to Trend Micro Control Manager. Supports single sign-on to enable Trend Micro Control Manager administrator to access Trend Micro Mobile Security Web console without requiring to provide authentication information.
Wi-Fi hotspot setting for iOS	Wi-Fi Hotspot settings for iOS 7.0 or above mobile devices.
Improved Corporate Data Security	"Open-in" management settings for administrator to protect corporate data by restricting opening files in certain applications.
Single Sign-on Support for iOS	Single sign-on support for iOS 7.0 or above mobile devices to enable users to use their credentials across applications specified by the administrator.
Web Threat Protection Support for iOS	Web Threat Protection support for iOS 7.0 or above mobile devices to filter specific Web sites or limited adult content.
Per-App VPN Support for iOS	Per-App VPN support for iOS 7.0 or above mobile devices, to enable administrators to link a VPN with certain applications so that these applications use the VPN to access network.
iOS Device Provisioning	Enables you to push the Configuration Profile to iOS mobile devices to configure VPN, Wi-Fi and Exchange ActiveSync settings.
IPv ⁶ Support	IPv6 support for server and mobile device agents.
Exchange Connector Support	Exchange Connector support for Microsoft Exchange Server 2013

What's New in Release 9.0

The following table describes additional features that come with Trend Micro™ Mobile Security for Enterprisev9.0.

FEATURE NAME	DESCRIPTION
Standalone Management Server	This release of Trend Micro Mobile Security is independent of OfficeScan and can be installed directly on a Windows computer.
Optional Cloud Communication Server	In addition to the Communication Server installed locally (Local Communication Server), this release also provides the option to use the Communication Server deployed in the Cloud (Cloud Communication Server). The administrators do not need to install the Cloud Communication Server, and it is maintained by Trend Micro.
Exchange Server Integration	Provides integration with the Microsoft Exchange Server, and supports iOS, Android and Windows Phone mobile devices that use Exchange ActiveSync service.
Template-based Policies	Enables you to create, copy or delete security policies and assign it to a certain mobile device group.
Support for Multiple Administrator Accounts	Enables you to create multiple administrator accounts with different roles that can be customized as and when required.
Updated Device Statuses	Displays more appropriate current status for mobile devices with the updated device status list.
iOS Device Provisioning	Enables you to push the Configuration Profile to iOS mobile devices to configure VPN, Wi-Fi and Exchange ActiveSync settings.
Supervised Device Management for iOS Mobile Devices	This release also adds the support for supervised iOS mobile devices.
Dashboard Screen Management	Enables you to manage the information displayed on the Dashboard screen in the form of widgets. You can add or remove the widgets according to your needs.

FEATURE NAME	DESCRIPTION
Server Command Confirmation	Provides the Command Queue Management interface that displays the current status of every command executed from the server.
Application Control Using Categories	Enables you to allow or block the installation of applications belonging to the certain categories on iOS and Android mobile devices using approved and blocked lists.
Mobile Device Enrollment Using QR-code	Introduces mobile device enrollment using QR-code that is sent in the user's email.
Feature Lock Policy Enhancement	Adds more features and OS components to the feature lock list for the administrator to control their availability on mobile devices.
iOS Volume Purchase Program Support	Enables you to import the iOS applications to the Mobile Security administration Web console that are purchased through the Apple's Volume Purchase Program.
Updated Mobile Device Agent Interface	Introduces the new user interface for Android and iOS mobile device agents.
Integration with MARS	Provides server and Android mobile device agent integration with Trend MicroMobile Application Reputation Service (MARS) for applications security risk and resource usage.
Administrator Reports Download	Enables you to download the Administrator Reports from the Mobile Securityadministration Web console.
Policy Violation Log	Provides Policy Violation Log for Android mobile devices.
Integration with Trend MicroControl Manager	Trend Micro Mobile Security provides integration with Trend MicroControl Manager. This integration enables Control Manager administrators to deliver corporate policies to the mobile devices and allows them to view the Mobile Security Dashboard screen in Control Manager.

What's New in Release 8.0 SP1

The following table describes additional features that were introduced in Trend Micro™ Mobile Security for Enterprise v8.0 Service Pack 1 (SP1).

FEATURE NAME	DESCRIPTION
Authentication Based on Device Identity	Enables you to authenticate a batch of mobile devices using their IMEI numbers and/or Wi-Fi MAC addresses.
Unmanaged Group for Android and iOS	Introduces a group "Unmanaged" for Android mobile devices on which 'Device administrator' is deactivated, and for iOS mobile devices on which the enrollment profiles are removed.
Enhanced Event Logs	Provides enhanced event logs to record events related to mobile device password reset, remote locate, remote lock and remote wipe.
Customizable Enrollment URL	Provides a shorter and customizable URL for the enrollment of mobile devices.
Simple iOS client	Introduces an iOS client for easy user authentication and enrollment using user email address. The iOS client also provides access to the Enterprise App Store on the mobile device.

What's New in Release 8.0

The following table describes additional features that were introduced in Trend Micro™ Mobile Security for Enterprise v8.0.

FEATURE NAME	DESCRIPTION
Agent Customization	Enables you to preset the server IP address and port number into the Android installation package.
Web Proxy Support for Android	Enables you to set Web proxy in Android mobile devices.

FEATURE NAME	DESCRIPTION
HTTP(S) Push Notification Setting for Android	Provides setting to enable or disable the HTTP(S) push notifications for Android mobile devices.
Simpler Provisioning	Enables you to configure server IP address, domain name and server port number in Android mobile devices in advance, to reduce the effort of deployment and enrollment of mobile devices.
Scan After Pattern Update	Automatically starts scanning the mobile device for security threats after successful pattern update, and displays the progress in the notification bar.
Web Threat Protection Policy	Enables you to manage Web threat protection policy from the Mobile Security Management Server and deploys it on Android mobile devices. It also enables Android mobile devices to send the Web threat protection log back to the server.
Adds SD Card Restriction for Android	Enables you to control the availability of the SD card for Android mobile devices.
Application Inventory	Maintains the list of installed applications on mobile devices and displays it on the device status screen.
Application Control	Enables you to allow or block the installation of certain applications on mobile devices using approved and blocked lists.
Application Push	Enables you to push the application installation package or Web link of the application to mobile devices for installation.
Selective Wipe	Enables you to delete all the corporate data from the server, without deleting the user's personal data.
Compliance Check	Enables you to set the compliance criteria on the server, and checks the mobile devices for compliance.
Optional Authentication using Active Directory	Enables you to set user authentication using Active Directory (AD) or Mobile Security database for Symbian, Windows Mobile, iOS and Android mobile devices for registration.

FEATURE NAME	DESCRIPTION
Dashboard Screen	Introduces the Dashboard screen to replace the old Summary screen on the Web console to provide the status summary of server components and mobile devices.
Scheduled Reports	Enables you to configure Mobile Security to send scheduled reports at the pre-defined intervals.
Quick Configuration Verification Screen	Introduces the Mobile Security Configuration and Verification screen that enables you to quickly verify Mobile Security configuration and identifies the problems, if any. If the configuration verification screen detects any wrong configuration setting, it provides suggestions to correct it.
On-Demand Remote Password Reset for iOS and Android	Enables you to reset the password remotely for iOS and Android mobile devices from the Web console.
Enterprise App Store	Enables you to create a list of webclips and apps for the users to download and install on their mobile devices.

What's New in Release 7.1

The following table describes additional features that were introduced in Trend MicroTM Mobile Security for Enterprise v7.1.

FEATURE NAME	DESCRIPTION
Support for iOS and Blackberry Mobile Devices	Mobile Security v7.1 added support for iOS and Blackberry mobile devices.
Integrated with Active Directory	Mobile Security v7.1 leverages the corporate's Active Directory (AD) for importing users and for performing user authentication.
Updated Architecture	In Mobile Security v7.1, single and dual server deployment models are introduced. SMS Gateway is also removed in v7.1.

FEATURE NAME	DESCRIPTION
Provisioning Policy	This version introduces the provisioning policy for mobile devices.

What's New in Release 7.0

This section describes additional features that were introduced in Trend Micro™ Mobile Security for Enterprise v7.0.

FEATURE NAME	DESCRIPTION
Support for Android Mobile Devices	Mobile Security v7.0 added support for Android v2.1 or above mobile devices.
Call Filtering Policies	Enables the administrator to control the incoming or outgoing calls on Android mobile devices.
Updated Feature Locking	Enables the administrator to control the availability of certain components for Android mobile devices that are within the range of certain access point(s).
Locate Remote Device	Enables the administrator to locate the remote device through the wireless network or by using mobile device's GPS and displaying its location on Google Maps. This new feature helps locate the lost, stolen or misplaced mobile devices.
Updated Architecture	In Mobile Security v7.0, SMS Gateway is added as an alternate to SMS Sender to send SMS messages to mobile devices.

Main Mobile Device Agent Features

FEATURE NAME	DESCRIPTION
Anti-Malware Scanning	Mobile Security incorporates Trend Micro's anti-malware technology to effectively detect threats to prevent attackers from taking advantage of vulnerabilities on mobile devices. Mobile Security is specially designed to scan for mobile threats.
Web Security	As technology increases for mobile devices, the sophistication of mobile threats is also increasing. Trend Micro Mobile Security provides Web Reputation and Parental Controls to protect your mobile device from unsafe Web sites and the Web sites that may contain objectionable material for children, teenagers and other family members. You can modify your Web Reputation and Parental Controls setting levels as per your desired settings. Mobile Security also maintains the log of the Web sites that were blocked by Web Reputation or Parental Controls in their specific logs.
SMS Anti-Spam	<p>Mobile devices often receive unwanted messages or spam through SMS messaging. To filter unwanted SMS messages into a spam folder, you can specify the phone numbers from which all SMS messages will be considered spam or you can specify a list of approved phone numbers and configure Mobile Security to filter all messages from senders that are not in the approved list. You can also filter unidentified SMS messages or messages without sender numbers. Your mobile device will automatically store these messages to the spam folder in your inbox.</p> <hr/> <p> Note</p> <p>The SMS Anti-Spam feature is not available on mobile devices without phone capabilities.</p>

FEATURE NAME	DESCRIPTION
Call Filtering	<p>Mobile Security enables you to filter incoming or outgoing calls from the server. You can configure Mobile Security to block incoming calls from certain phone numbers or you can specify a list of approved phone numbers to which the calls may be made from the mobile device. Mobile Security also enables mobile device users to specify their own Blocked or Approved list to filter unwanted incoming calls.</p> <p> Note</p> <p>The Call Filtering feature is not available on mobile devices without phone capabilities.</p>
WAP-Push Protection	<p>WAP-Push is a powerful method of delivering content to mobile devices automatically. To initiate the delivery of content, special messages called WAP-Push messages are sent to users. These messages typically contain information about the content and serve as a method by which users can accept or refuse the content.</p> <p>Malicious users have been known to send out inaccurate or uninformative WAP-Push messages to trick users into accepting content that can include unwanted applications, system settings, and even malware. Mobile Security lets you use a list of trusted senders to filter WAP-Push messages and prevent unwanted content from reaching mobile devices.</p> <p>The WAP-Push protection feature is not available on mobile devices without phone capabilities.</p>
Authentication	<p>After installing the Mobile Device Agent, the mobile device user need to provide the authentication information to enroll the mobile devices with the Mobile Security Management Server.</p>
Regular Updates	<p>To protect against the most current threats, you can either update Mobile Security manually or configure it to update automatically. To save cost, you can also set a different update frequency for the mobile devices that are in “roaming”. Updates include component updates and Mobile Security program patch updates.</p>

FEATURE NAME	DESCRIPTION
Logs	<p>The following Mobile Device Agent logs are available on the Management Server:</p> <ul style="list-style-type: none">• malware protection log• Web threat protection log• event log• violation log <p>You can view the following logs on mobile devices:</p> <ul style="list-style-type: none">• Android:<ul style="list-style-type: none">• malware scan history• privacy scan history• Web blocking history• call blocking history• text blocking history• update history

Supported Mobile Device OS Features

The following table shows the list of features that Trend Micro Mobile Security supports per platform.

TABLE 1-3. Trend Micro Mobile Security 9.3 Feature Matrix

POLICY	FEATURES	SETTINGS	iOS	Android	Windows
Provisioning	Wi-Fi	Standard Wi-Fi configuration	●	●	
		Legacy hotspot configuration	●		
		Hotspot 2.0 configuration	●		
	Exchange ActiveSync	Exchange ActiveSync configuration	●		
	VPN	VPN configuration	●		
	Global HTTP Proxy	Global HTTP Proxy configuration	●		
	Single Sign-on	Single sign-on configuration	●		
	Certificate	Certificate configuration	●		
	Cellular network	Cellular network configuration	●		
	AirPlay/AirPrint	AirPlay/AirPrint configuration	●		
	Themes (Supervised only)	Wallpaper configuration	●		
		Font configuration	●		
Device Security	Malware Protection	Unmarked Email Domains	●		
		Managed Safari Web Domains	●		
		Real-time scan		●	
	Privacy Protection	Scan after pattern update		●	
		Manual scan	●	●	
		Privacy scan		●	
		Privacy scan log upload		●	
		Facebook scan	●	●	

POLICY	FEATURES	SETTINGS	iPhone	Android	Windows
Data Protection	Spam SMS Prevention	Server-side control		<input checked="" type="checkbox"/>	
		Use blocked list		<input checked="" type="checkbox"/>	
		Use approved list		<input checked="" type="checkbox"/>	
	Spam WAP Push Prevention	Server-side control		<input checked="" type="checkbox"/>	
		Use approved list		<input checked="" type="checkbox"/>	
	Call Filtering	Server-side control		<input checked="" type="checkbox"/>	
		Use blocked list		<input checked="" type="checkbox"/>	
		Use approved list		<input checked="" type="checkbox"/>	
	Web Threat Protection	Server-side control		<input checked="" type="checkbox"/>	
		Use blocked list		<input checked="" type="checkbox"/>	
		Use approved list		<input checked="" type="checkbox"/>	
		Allow specific Web sites only	<input checked="" type="checkbox"/>		
		Allow limited adult content	<input checked="" type="checkbox"/>		

POLICY	FEATURES	SETTINGS			
Data Protection	Password Settings	Use Password for login	●	●	●
		Allow simple password	●	●	●
		Require alphanumeric password	●	●	●
		Minimum password length	●	●	●
		Password expiration	●	●	●
		Password history	●	●	●
		Auto-lock	●	●	●
		Password failure action	●	●	●
	Feature Lock	Camera	●	●	
		FaceTime	●		
		Screen capture	●		
		Apps installation	●		

POLICY	FEATURES	SETTINGS	Apple	Android	Windows
Data Protection	Feature Lock	Sync while roaming	●		
		Voice dialing	●		
		In-app purchase	●		
		Multiplayer gaming	●		
		Adding game center friends	●		
		Game Center (Supervised Only)	●		
		Force encrypted backups	●		
		Explicit music, podcast and iTunes U	●		
		Passbook while device is locked	●		
		Bluetooth and Bluetooth discovery		●	
		WLAN/Wi-Fi		●	
		3G data network		●	

POLICY	FEATURES	SETTINGS	APPLE	ANDROID	WINDOWS
Data Protection	Feature Lock	Tethering		●	
		Developer mode		●	
		Speaker/speakerphone/microphone			
		Restrict memory cards		●	
		Siri	●		
		Siri while device is locked	●		
		Enable profanity filter	●		
		Enable access to iCloud services	●		
		Cloud backup	●		
		Cloud document sync	●		
		Photo Stream	●		

Policy	Features	Settings			
Data Protection	Feature Lock	Shared Photo Streams			
		Diagnostic data			
		Accept untrusted Transport Layer Security (TLS)			
		Force iTunes to store password			
		YouTube			
		Open documents from managed apps in other apps			
		Open documents from other apps in managed apps			
		iTunes			
		Safari Web browser			
		AutoFill			
		JavaScript			
		Popups			
		Force fraud warning			
		Accept cookies			
		Removing apps (Supervised only)			
		Bookstore (Supervised only)			

Policy	Features	Settings			
Data Protection	Feature Lock	Erotica (Supervised only)			
		Configuration Profile Installation (Supervised only)			
		iMessage (Supervised only)			
		Ratings region			
		Movies			
		TV Shows			
		Apps			
		Account modification (Supervised only)			
		AirDrop (Supervised only)			
		Applications cellular data modification (Supervised only)			
		Assistant (Siri) user-generated content (Supervised only)			
		Cloud keychain synchronization			
		Find My Friends modification (Supervised only)			
		Fingerprint for unlocking a device			
		Host pairing (Supervised only)			

Policy	Features	Settings			
Data Protection	Feature Lock	Lock screen control center			
		Lock screen notifications view			
		Lockscreen today view			
		Over the Air Public Key Infrastructure (OTAPKI) updates			
		Force limit ad tracking			
		Force AirPlay outgoing requests pairing password			
		Allow managed apps to store data in iCloud			
		Allow backup of enterprise books			
		Allow configuration restrictions			
		Allow Erase All Content and Settings			
		Allow Handoff			
		Allow Internet results in spotlight			
		Allow notes and highlights sync for enterprise books			
Compliance Settings	Compliance Settings	Rooted/Jailbroken			
		Unencrypted			
		OS version check			

Policy	Features	Settings			
Application Management	Application Monitor & Control	Required Applications	●	●	
		Permitted Applications	●	●	
		Lock to App (Supervised only)	●		
	Volume Purchasing Program	Volume Purchasing Program	●		
Remote Control	Register		●	●	
	Update		●	●	
	Anti-theft	Remote locate		●	
		Remote lock	●	●	
		Remote wipe	●	●	●
		Reset password	●	●	
	Samsung KNOX Workspace	Create container		●	
		Remove container		●	
		Lock container		●	
		Unlock container		●	
		Reset container password		●	

POLICY	FEATURES	SETTINGS			
Samsung KNOX Workspace Policy	Container account setting	Blocked list		●	
		Approved list		●	
	Restriction settings	Allow users to use camera		●	
		Allow display the share via list of applications		●	
	Browser settings	Enable auto fill setting		●	
		Enable cookies setting		●	
		Enable popups setting		●	
		Enable force fraud warning setting		●	
		Enable JavaScript setting		●	
		Enable Web Proxy		●	

Policy	Features	Settings			
Samsung KNOX Workspace Policy	Container password settings	Enable password visibility			
		Minimum password change length			
		Minimum password length			
		Maximum inactivity timeout			
		Maximum number of failed attempts			
		Password history			
		Maximum password age			
		Minimum number of special characters required in a password			
		Password complexity			
Device Enrollment Program	Application settings	Installation approved list			
		Installation blocked list			
		Required applications			
		Disabled applications			
		Device Enrollment Program			

Chapter 2

Getting Started with Mobile Security

This chapter helps you start using Mobile Security and provides you the basic usage instructions. Before you proceed, be sure to install the Management Server, Communication Server, and the Mobile Device Agent on mobile devices.

This chapter includes the following sections:

- *Accessing the Administration Web Console on page 2-2*
- *Dashboard Information on page 2-5*
- *Administration Settings on page 2-10*
- *Command Queue Management on page 2-18*
- *Exchange Server Integration on page 2-20*
- *Managing Certificates on page 2-21*

Administration Web Console

You can access the configuration screens through the Mobile Security administration Web console.

The Web console is the central point for managing and monitoring Mobile Security throughout your corporate network. The console comes with a set of default settings and values that you can configure based on your security requirements and specifications.

You can use the Web console to do the following:

- Manage Mobile Device Agents installed on mobile devices
- Configure security policies for Mobile Device Agents
- Configure scan settings on a single or multiple mobile devices
- Group devices into logical groups for easy configuration and management
- View registration and update information

Accessing the Administration Web Console

Procedure

1. Log on to the administration Web console using the following URL structure:

```
https://  
<External_domain_name_or_IP_address>:<HTTPS_port>/mdm/web
```



Note

Replace <External_domain_name_or_IP_address> with the actual IP address, and <HTTPS_port> with the actual port number of the Management Server.

The following screen appears.

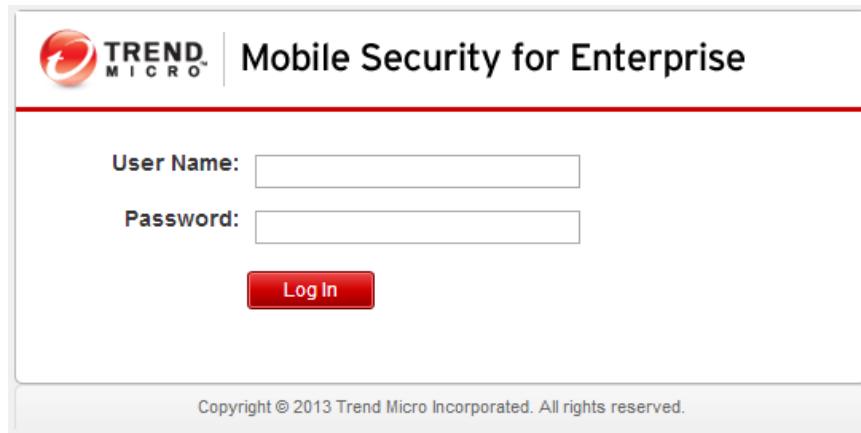


FIGURE 2-1. Administration Web console login screen

2. Type a user name and password in the fields provided and click **Log In**.



Note

The default **User Name** for administration Web console is "root" and the **Password** is "mobilesecurity".

Make sure that you change the administrator password for the user "root" after your first sign in. See [Editing an Administrator Account on page 2-15](#) for the procedure.



Important

If you are using Internet Explorer to access the administration Web console, make sure the following:

- the **Compatibility View for Web sites** options is turned off. See [Turning Off Compatibility Mode in Internet Explorer on page 2-4](#) for details.
- the JavaScript is enabled on your browser.

**Note**

If you are unable to access the administration Web console in Windows 2012 using Internet Explorer 10 in Metro mode, verify that the **Enhanced Protected Mode** option is disabled in Internet Explorer.

Turning Off Compatibility Mode in Internet Explorer

Trend Micro Mobile Security does not support **Compatibility View** on Internet Explorer. If you are using Internet Explorer to access the Mobile Security administration Web console, turn off the Web browser's Compatibility View for the Web site, if it is enabled.

Procedure

1. Open Internet Explorer and click **Tools > Compatibility View settings**.
The **Compatibility View Settings** window displays.
2. If the administration console is added to the **Compatibility View** list, select the Web site and click **Remove**.
3. Clear **Display intranet sites in Compatibility View** and **Display all websites in Compatibility View** checkboxes, and then click **Close**.

Product License

After the Evaluation version license expires, all program features will be disabled. A Full license version enables you to continue using all features, even after the license expires. It's important to note however, that the Mobile Device Agent will be unable to obtain updates from the server, making anti-malware components susceptible to the latest security risks.

If your license expires, you will need to register the Mobile Security Management Server with a new Activation Code. Consult your local Trend Micro sales representative for more information.

To download updates and allow remote management, Mobile Device Agent must enroll to the Mobile Security Management Server. For instructions to manually enroll Mobile Device Agent on mobile devices, refer to the *Installation And Deployment Guide*.

To view license upgrade instructions for Management Server, click the **View license upgrade instructions** link in Mobile Security **Product License** screen.

Dashboard Information

The **Dashboard** screen displays first when you access the Management Server. This screen provides an overview of the mobile device registration status and component details.

The dashboard screen is divided into five tabs:

- **Summary**—shows the device health status and device’s operating system summary.
- **Health**—shows the components and policy update and mobile device health status. In this category, you can:
 - View mobile devices’ status:
 - **Healthy**—shows that the device is enrolled to the Mobile Security Management Server and the components and policies on the mobile device are up-to-date.
 - **Non-Compliant**—shows that the device is enrolled to the Mobile Security Management Server, but does not comply with the server policies.
 - **Out of Sync**—shows that the device is enrolled to the Mobile Security Management Server, but either the components or the policies are out-of-date.
 - **Inactive**—shows that the device is not yet enrolled to the Mobile Security Management Server.
 - View the total number of enrolled and unregistered mobile devices managed by Mobile Security.

A mobile device may remain unregistered if a connection to the Communication Server is unsuccessful.

- View mobile device program patch and component update status:
 - **Current Version**—the current version number of the Mobile Device Agent or components on the Mobile Security Management Server
 - **Up-to-date**—the number of mobile device with updated Mobile Device Agent version or component
 - **Out-of-date**—the number of mobile devices that are using an out-of-date component
 - **Update Rate**—the percentage of mobile devices using the latest component version
 - **Upgraded**—the number of mobile devices using the latest Mobile Device Agent version
 - **Not Upgraded**—the number of mobile devices that have not upgraded to use the latest Mobile Device Agent version
 - **Upgrade Rate**—the percentage of mobile devices using the latest Mobile Device Agent
- View server update status:
 - **Server**—the name of the module
 - **Address**—the domain name or IP address of the machine hosting the module
 - **Current Version**—the current version number of the Mobile Security Management Server modules
 - **Last Updated**—the time and date of the last update
- **Inventory**—shows mobile device operating system version summary, telephone carriers summary, mobile device vendors summary and top 10 applications installed on mobile devices.
- **Compliance**—shows the app control, encryption and jailbreak/root status of mobile devices. In this category, you can:

- View the mobile device jailbreak/root status:
 - **Jailbroken/Rooted**—the number of mobile devices that are jailbroken/rooted
 - **Not Jailbroken/Rooted**—the number of mobile devices that are not jailbroken/rooted
- View the mobile device encryption status:
 - **Encrypted**—the number of mobile devices that are encrypted
 - **Not Encrypted**—the number of mobile devices that are not encrypted
- View the mobile device application control status:
 - **Compliant**—the number of mobile devices that comply with the Mobile Security's compliance and application control policy
 - **Not Compliant**—the number of mobile devices that do not comply with the Mobile Security's compliance and application control policy
- **Protection**—shows the lists of top five (5) security threats and top five (5) blocked Web sites.



Note

On each of the widgets on the **Dashboard** screen, you can either select **All**, or the group name from the drop-down list to display the information of the relevant devices.

Customizing the Dashboard

Mobile Security enables you to customize the **Dashboard** information according to your needs and requirements.

Adding a New Tab

Procedure

1. On the **Dashboard** screen, click the  button.

2. On the **New Tab** pop-up window, do the following:
 - **Title:** type the tab name.
 - **Layout:** select the layout for the widgets displayed on the tab.
 - **Auto-fit:** select **On** or **Off** to enable or disable the setting for the widgets on the tab.
3. Click **Save**.

Removing a Tab

Procedure

1. Click the tab, and then click the **x** button displayed on the tab.
2. Click **OK** on the confirmation pop-up dialog.

Adding Widgets

Procedure

1. On the **Dashboard** screen, click the tab on which you want to add widgets.
2. Click **Add Widgets** on the top-right of the tab.
The **Add Widgets** screen displays.
3. Select the category from the left menu and/or type the keywords in the search field to display the relevant widgets list.
4. Select the widgets that you want to add, and then click **Add**.

The selected widgets appear on the tab on the **Dashboard**.

Removing Widgets

Procedure

1. On the **Dashboard** screen, click the tab from which you want to remove widgets.
2. On the widget that you want to remove, click  on the top-right of the widget.

Changing Widget's Position

Procedure

1. On the **Dashboard** screen, click the tab whose widgets you want to rearrange.
2. Click and hold the widget title bar, then drag and drop it to the new position.

Refreshing the Information on the Widgets

Procedure

1. On the **Dashboard** screen, click the tab whose widget you want to refresh.
2. On the widget that you want to refresh, click  on the top-right of the widget.

Viewing or Modifying Tab Settings

Procedure

1. On the **Dashboard** screen, click the tab whose settings you want to view or modify.
2. Click **Tab Settings**.
3. Modify the settings as required, and then click **Save**.

Administration Settings

Configuring Active Directory (AD) Settings

Trend Micro Mobile Security enables you to configure user authorization based on the Active Directory (AD). You can also add mobile devices to the device list using your AD. Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

Configuring User Authentication

Trend Micro Mobile Security enables you to configure user authentication based on the Active Directory (AD) or through an Enrollment Key. Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

Configuring Database Settings

Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

Configuring Communication Server Settings

Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

Managing Administrator Accounts

The **Administrator Account Management** screen enables you to create user accounts with different access role for the Management Server.

Default Administrator Account Name and Role

The default administrator account is “root” (password: “mobilesecurity”). The root account cannot be deleted and can only be modified. See [Editing an Administrator Account on page 2-15](#) for the detailed procedure.

TABLE 2-1. The root account properties

ROOT ACCOUNT PROPERTIES		CAN BE MODIFIED?
Administrator Accounts	Account name	No
	Full name	Yes
	Password	Yes
	Email address	Yes
	Mobile phone number	Yes
Administrator Roles	Administrator role modification	No

The default administrator role is **Super Administrator**, which has the maximum access to all settings. The **Super Administrator** role cannot be deleted and can only be modified. See [Editing an Administrator Role on page 2-17](#) for the detailed procedure.

TABLE 2-2. The Super Administrator role properties

SUPER ADMINISTRATOR ROLE PROPERTIES		CAN BE MODIFIED?
Role Details	Administrator role	No
	Description	Yes
Group Management Control	Managed Groups	No
Exchange Server Domain Control	Domain selection	No

TABLE 2-3. Access rights for Super Administrator and a Group Administrator

SERVER COMPONENTS	PERMISSIONS	SUPER ADMINISTRATOR	GROUP ADMINISTRATOR
Administration	Updates	Supported	Not supported
	Administrator Account Management	Can modify all the account	Can only modify own account information
	Device Enrollment Settings	Supported	Not supported
	Certificate Management	Supported	Supported
	Command Queue Management	Can manage all commands	Can only view commands for the related groups
	Database Settings	Supported	Not supported
	Communication Server Settings	Supported	Not supported
	Active Directory Settings	Supported	Not supported
	Management Server Settings	Supported	Not supported
	Exchange Server Integration	Supported	Not supported
	Configuration and Verification	Supported	Not supported
	Product License	Supported	Not supported

SERVER COMPONENTS	PERMISSIONS	SUPER ADMINISTRATOR	GROUP ADMINISTRATOR
Notification/ Reports	Log Query	All the groups	Managed groups only
	Log Maintenance	All the groups	Managed groups only
	Administrator Notification/Reports	Supported	Not supported
	User Notification	Supported	Not supported
	Settings	Supported	Not supported
App Store	App Store	Supported	Not supported
Policy	Create a policy	Supported	Supported for managed groups only
	View a policy	Supported	Supported for managed groups only
	Copy a policy	Supported	Supported for managed groups only
	Delete a policy	Supported	Supported for managed groups only

SERVER COMPONENTS	PERMISSIONS	SUPER ADMINISTRATOR	GROUP ADMINISTRATOR
Devices	View devices	Supported	Supported for managed groups only
	Add group	Supported	Supported
	Invite Devices	Supported	Supported for managed groups only
	Exchange ActiveSync Devices	Supported	Supported for managed groups only

Adding Administrator Accounts

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Accounts** tab, click **Create** to add a new account.

The **Create Administrator Account** screen appears.

4. Under section **Account Details**, do one of the following:
 - Select **Trend Micro Mobile Security User**, and specify the following user account details:
 - **Account name**: name used to log on to the Management Server.
 - **Full name**: the user's full name.
 - **Password** (and **Confirm Password**).
 - **Email address**: the user's email address.
 - **Mobile phone number**: the user's phone number.

- Select **Active Directory user**, and do the following:
 - a. Type the user name in the search field and click **Search**.
 - b. Select the user name from the list on the left and click **>** to move the user to the **Selected users** list on the right.

**Note**

To remove the user from the **Selected users** list on the right, select the user name and click **<**.

You can also select multiple users at the same time by holding Ctrl or Shift keys while clicking on the username.

5. Under section **Administrator Role**, select the role from the **Choose the administrator role:** drop-down list.

See [Creating an Administrator Role on page 2-16](#) for the procedure for creating administrator roles

6. Click **Save**.

Editing an Administrator Account

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Accounts** tab, click **Create** to add a new account.

The **Edit Administrator Account** screen appears.

4. Modify the administrator account details and access role as required.
 - **Account Details**
 - **Account name:** name used to log on to the Management Server.
 - **Full name:** the user's full name.

- **Email address:** the user's email address.
- **Mobile phone number:** the user's phone number.
- **Password:** click **Reset Password** to change the user account password, type the new password in the **New Password** and **Confirm Password** fields, and click **Save**.

• **Administrator Role**

- **Choose the administrator role:** select the administrator role from the drop-down list.

For the procedure to create an administrator role, see *[Creating an Administrator Role on page 2-16](#)*.

5. Click **Save**.

Deleting an Administrator Account

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Accounts** tab, select the administrator accounts that you want to delete, and click **Delete**.

Creating an Administrator Role

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Roles** tab, click **Create**.

The **Create Administrator Role** screen appears.

4. Under section **Role Details**, provide the following information:
 - Administrator Role
 - Description
5. Under section **Group Management Control** select the mobile device groups that this administrator role can manage.
6. Click **Save**

Editing an Administrator Role

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Roles** tab, click **Create**.
The **Create Administrator Role** screen appears.
4. Modify the role details as required and click **Save**.

Deleting an Administrator Role

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Administrator Account Management**.
3. On the **Administrator Roles** tab, select the administrator role you want to delete, and click **Delete**.

Changing Administrator Password

Refer to the topic [Editing an Administrator Account on page 2-15](#) for the procedure of changing the administrator account password.

Command Queue Management

Mobile Security keeps the record of all the commands you have executed from the Web console and enables you to cancel or resend a command, if required. You can also remove the commands that have already been executed and are not required to be displayed on the list.

To access the **Command Queue Management** screen, navigate to **Administration > Command Queue Management**.

The following table describes all the command statuses on the **Command Queue Management** screen.

COMMAND STATUS	DESCRIPTION
Waiting to Send	The Mobile Security Management Server is in the process of sending the command to mobile device. You can cancel the command while it is in this status.
Waiting Acknowledgment	The Mobile Security Management Server has sent the command to mobile device and is waiting for the acknowledgement from the mobile device.
Unsuccessful	Unable to execute the command on mobile device.
Successful	The command has been executed successfully on the mobile device.
Canceled	The command has been canceled before it was executed on the mobile device.

To keep the size of commands from occupying too much space on your hard disk, delete the commands manually or configure Mobile Security administration Web

console to delete the commands automatically based on a schedule in the **Command Queue Maintenance** screen.

Configuring Schedule for Deleting Old Commands

Procedure

1. Click **Administration > Command Queue Management**.

The **Command Queue Management** screen displays.

2. On the **Command Queue Maintenance** tab, select **Enable scheduled deletion of commands**.
3. Specify the number of days old commands you want to delete.
4. Specify the commands queue deletion frequency and time.
5. Click **Save**.

Deleting Old Commands Manually

Procedure

1. Click **Administration > Command Queue Management**.

The **Command Queue Management** screen displays.

2. On the **Command Queue Maintenance** tab, select **Enable scheduled deletion of commands**.
3. Specify the number of days old commands you want to delete.
4. Click **Delete Now**.

Exchange Server Integration

Configuring Exchange Server Integration Settings

Refer to the topic *Configuring Exchange Server Integration Settings* in the *Installation and Deployment Guide* for the detailed configuration steps.

Configuring Exchange Connector

You can configure the Exchange Connector to update automatically whenever a higher version is available.

Procedure

1. On the computer where Exchange Connector is installed, click the **Show hidden icons** button in the system tray on the Windows taskbar (near the system clock).
2. Right-click the **Exchange Connector** icon, and then click **About Trend Micro Mobile Security-Exchange Connector**.

About Trend Micro Mobile Security-Exchange Connector screen appears.

3. Configure the following:
 - **Enable automatic upgrade**—when selected, the Exchange Connector automatically upgrades to a new version whenever it is available.
 - **Server Address**—Mobile Security Management Server IP address.
 - **HTTPS Port**—Mobile Security Management Server HTTPS port number for the administration Web console.

Managing Certificates

Use the **Certificate Management** screen to upload .pfx, .p12, .cer, .crt, .der certificates to the Mobile Security Management Server.

Uploading a Certificate

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Certificate Management**.
3. Click **Add**.

The **Add certificate** window appears.

4. Click **Choose File** and then select a .pfx, .p12, .cer, .crt, .der certificate file.
5. Type the certificate password in the **Password** field.
6. Click **Save**.

Deleting Certificate

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Certificate Management**.
3. Select certificates that you want to delete, and then click **Delete**.

Chapter 3

Managing Mobile Devices

This chapter helps you start using Mobile Security. It provides basic setup and usage instructions. Before you proceed, be sure to install the Management Server, Communication Server, and the Mobile Device Agent on mobile devices.

The chapter includes the following sections:

- *Managed Devices Tab on page 3-3*
- *Managing Groups on page 3-4*
- *Managing Mobile Devices on page 3-5*
- *Mobile Device Status on page 3-10*
- *Mobile Device Agent Tasks on page 3-13*
- *Updating Mobile Device Agents on page 3-13*
- *Lost Device Protection on page 3-13*
- *Resetting Password Remotely on page 3-17*
- *Invited Devices Tab on page 3-21*
- *Exchange ActiveSync Devices Tab on page 3-24*
- *Device Enrollment Program Tab on page 3-27*

- *Integration with Trend Micro Control Manager on page 3-30*

Managed Devices Tab

The **Managed Devices** tab on the **Devices** screen enables you to perform tasks related to the settings, organization or searching of Mobile Device Agents. The toolbar above the device tree viewer lets you perform the following tasks:

- configure the device tree (such as creating, deleting, or renaming groups and creating or deleting Mobile Device Agents)
- search for and display Mobile Device Agent status
- on-demand Mobile Device Agent component update, wipe/lock/locate remote device, and update policy
- configure Mobile Device Agents information
- export data for further analysis or backup

Groups in Mobile Security

Mobile Security Management Server automatically creates a root group **Mobile Devices** with the following two sub-groups:

- **default**—this group contains Mobile Device Agents that do not belong to any other group. You cannot delete or rename the **default** group in the Mobile Security device tree.
- **unauthorized**—Mobile Security Management Server automatically creates this group if **Device Authentication** is enabled in **Device Enrollment Settings**, and a list of mobile devices is used to authenticate. If there is an enrolled mobile device that is not in the list of mobile devices, Mobile Security moves such mobile device to the **unauthorized** group. Mobile Security also creates other groups and regroups all mobile devices according to the list that you use.



Note

If you enable **Device Authentication** in **Device Enrollment Settings**, and upload a blank mobile device list for authentication, Mobile Security will move all the current enrolled mobile devices to the group "Unauthorized".

**Note**

Device Authentication supports Android and iOS mobile devices only.

For instructions, refer to the Mobile Security Management Server *Online Help*.

Managing Groups

You can add, edit or delete groups under the **Mobile Devices** root group. However, you cannot rename or delete the root group **Mobile Devices** and the group **default**.

Adding a Group

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the root group **Mobile Devices**, and then click **Add Group**.
4. Configure the following:
 - **Parent group:** Select the group under which you want to create a sub-group.
 - **Group name:** Type a name for the group.
 - **Policy:** Select the policy from the drop down list that you want to apply to the group.
5. Click **Add**.

Renaming a Group

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the group that you want to rename.
4. Click **Edit**.
5. Modify the group name, and then click **Rename**.

Deleting a Group

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the group that you want to delete.
4. Click **Delete**, and then click **OK** on the confirmation dialog box.

Managing Mobile Devices

You can send invitation to mobile devices, edit mobile device information, delete mobile devices, or change the mobile device group on the **Devices** screen.

Sending Invitation to Mobile Devices

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. You can now invite one mobile device, a batch of mobile devices, a user or an email group (distribution list) from the Active Directory:

- To invite a mobile device:

- a. Click **Invite Users > Invite Single User**.

The **Invite Single User** window pops up.

- b. On the **Invite Single User** window, configure the following fields:

- **Email**—type the user email address to send notification mail.
- **User Name**—type the name of the mobile device to identify the device in the device tree.
- **Group**—select the name of the group to which the mobile device belongs from the drop-down list. You can always change the group to which the mobile device agent belongs.



Tip

To invite more devices, click the button.

- To invite a batch of mobile devices:
 - a. Click **Invite Users > Invite Batch**.
 - b. Type the device information using the following format in the text box on the window that displays:
email_address, device_name, group_name, asset_number (optional),
description(optional);

**Note**

Use semicolon (;) or "CR" to separate each device information.

- c. Click **Validate** to verify that the device information conforms to the specified format.
- To invite a user or an email group (distribution list) from the Active Directory:
 - a. Click **Invite Users** > **Invite from Active Directory**.
 - b. Type the user information in the search field provided, and click **Search**.
 - c. Select the users from the search result, and then click **Invite Devices**.
4. Click **Save**.

Mobile Security sends invitation email to the users of the invited devices.

Editing Mobile Device User Name

Context for the current task

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
3. The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree whose information you want to edit.
4. Click **Change User**, and then modify the user name in the field provided.
5. Click **Save**.

Editing Mobile Device Information

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree whose information you want to edit.
4. Click **Edit**.
5. Update the information in the following fields:
 - **Phone Number**—the phone number of the mobile device.
 - **Email**—the user email address to send notification mail.
 - **Device Name**—the name of the mobile device to identify the device in the device tree.
 - **Group**—the name of the group to which the mobile device belongs from the drop-down list.
 - **Asset Number**—type the asset number assigned to the mobile device.
 - **Description**—any additional information or notes related to the mobile device or the user.
6. Click **Save**.

Deleting Mobile Devices

Mobile Security provides the following two options for deleting mobile devices:

- *[Deleting Single Mobile Device on page 3-9](#)*
- *[Deleting Multiple Mobile Devices on page 3-9](#)*

Deleting Single Mobile Device

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to delete.
4. Click **Delete** and then click **OK** on the confirmation dialog box.

The mobile device is deleted from the mobile device tree, and is no longer enrolled with the Mobile Security Management Server.

Deleting Multiple Mobile Devices

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the group from the device tree whose mobile devices you want to delete.
4. Select the mobile devices from the list on the right pane, click **Delete** and then click **OK** on the confirmation dialog box.

The mobile devices are deleted from the mobile device tree, and are no longer enrolled with the Mobile Security Management Server.

Moving Mobile Devices to Another Group

You can move mobile devices from one group to another. Mobile Security will automatically send the notification to the user about the policies that you have applied to the group.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the group whose mobile devices you want to move to another group.
4. Select the mobile devices from the list on the right pane and then click **Move**.
The **Move Devices** dialog box displays.
5. From the drop-down list, select the target group and then click **OK**.

Mobile Device Status

On the **Managed Devices** tab in the **Devices** screen, select the mobile device to display its status information on the right-pane. Mobile device information is divided into the following sections:

- **Basic**—includes registration status, phone number, LDAP Account, and platform information.
- **Hardware, Operating System**—shows the detailed mobile device information including device and model names, operating system version, memory information, cellular technology, IMEI and MEID numbers, firmware version information, and last iCloud backup.
- **Security**—displays the mobile device's encryption status, mobile device's jail broken status, and the active iTunes account.

- **Network**—displays the Integrated Circuit Card ID (ICCID), bluetooth and WiFi MAC information, detailed network information including carrier network name, settings version, roaming status, Mobile Country Codes (MCC) and Mobile Network Codes (MNC) information, and personal hotspot status.
- **Policy**—shows the times the configuration and the security policy were last updated.
- **Installed Applications**—displays the list of all the applications that are installed on the mobile device, and the compliance check result. This tab is available only for Android and iOS mobile devices.
- **Samsung KNOX Information**—displays additional information about the mobile devices that support Samsung KNOX.

Basic Mobile Device Agent Search

To search for a Mobile Device Agent based on the mobile device name or phone number, type the information in the **Devices** screen and click **Search**. The search result displays in the device tree.

Advanced Mobile Device Agent Search

You can use the **Advanced search** screen to specify more Mobile Device Agent search criteria.

Procedure

1. In the **Devices** screen, click the **Advanced search** link. A pop-up window displays.
2. Select the search criteria and type the values in the fields provided (if applicable):
 - **Device Name**—descriptive name that identifies a mobile device
 - **Phone Number**—phone number of a mobile device
 - **Asset Number**—asset number of a mobile device
 - **IMEI**—IMEI number of a mobile device
 - **Serial Number**—serial number of a mobile device

- **Wi-Fi MAC Address**—Wi-Fi MAC address of a mobile device
- **Description**— description of a mobile device
- **Operating System**—confine the search to the specific operating system the mobile device is running; or to the version number for Android and iOS
- **Group**—group to which the mobile device belongs
- **Agent Version**—Mobile Device Agents version number on the mobile device
- **Malware Pattern Version**—Malware Pattern file version number on the mobile device
- **Malware Scan Engine Version**—Malware Scan Engine version number of the mobile device
- **App Name**—application installed on mobile devices
- **Mobile Device Agent Uninstalled by User**—confine the search to mobile devices on which Mobile Device Agent is uninstalled by the user
- **Rooted Mobile Device**—confine the search to rooted mobile devices
- **Infected mobile device agent**—confine the search to mobile devices with the specified number of detected malware
- **Device Status**—confine the search to the selected mobile devices' status(es)

3. Click **Search**. The search result displays in the device tree.

Device Tree View Options

If you select a group in the device tree, you can use the **Column** drop-down list box to select one of the pre-defined views: **General view** and **View all**. This enables you to quickly view information presented in the device tree. The information displayed in the device tree varies according to the selected option.

Mobile Device Agent Tasks

Trend Micro Mobile Security enables you to perform different tasks on the mobile devices from the **Devices** screen.

Updating Mobile Device Agents

You can send the update notification to mobile devices with out-of-date components or security policies from the **Managed Devices** tab in **Devices** screen.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the group whose mobile devices you want to update.
4. Click **Update**.

Mobile Security sends the update notification to all the mobile devices with out-of-date components or security policies.

You can also use the **Update** screen to set Mobile Security to automatically send update notification to mobile devices with out-of-date components or policies or initiate the process manually.

See [Updating Mobile Security Components on page 6-2](#) for more information.

Lost Device Protection

If a user loses or misplaces the mobile device, you can remotely locate, lock or delete all of the data on that mobile device.

Locating a Remote Mobile Device

You can locate the mobile device through the wireless network or by using mobile device's GPS. The Management Server displays the mobile device location on Google Maps.

This feature is available for Android and iOS mobile devices only.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to locate.
4. Click **Device Locate** and then click **OK** on the confirmation dialog-box.
The Mobile Security Management Server tries to locate the mobile device and displays the Google Maps link on the **Remote Locate Device** screen.
5. Click the Google Maps link on the **Remote Locate Device** screen to see the mobile device's most recent GPS location on the map.

Locking a Remote Mobile Device

You can send lock instruction from the administration Web console to remotely lock a mobile device. Users will require to type the power-on password to unlock the mobile device.



Note

This feature is supported on Android and iOS mobile devices only.

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to lock.
4. Do one of the following:

For an Android mobile device, click **Remote Lock** and then click **OK** on the confirmation dialog-box.

For an iOS mobile device, click **Remote Lock** then type a message that you want to send to the user, the user's phone number, and then click **Lock**.

The **Success** message displays on the screen if the lock command is generated successfully. To check whether the mobile device is locked successfully, you can check the command status in the **Command Queue Management** screen. See *Command Queue Management on page 2-18* for details.

Wiping a Remote Mobile Device

You can remotely reset the mobile device to factory settings and clear the mobile device internal memory/SD card. This feature helps ensure the security of the data for lost, stolen or misplaced mobile devices. You can also choose to clear only the following corporate data on the mobile device:

- for Android: Exchange mail, calendar and contacts
- for iOS: MDM profiles, related policies, configurations and data



WARNING!

Be careful when you use this feature as the action CANNOT be undone. All data will be lost and unrecoverable.



Note

This feature is supported on Android, iOS and Windows Phone mobile devices only.

For instructions on wiping a mobile device that uses Exchange ActiveSync, see [Wiping a Remote ActiveSync Mobile Device on page 3-26](#).

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to wipe.
4. Click **Remote Wipe**.

The **Remote Wipe Device** screen displays.

5. Select the appropriate Device Name checkbox.
6. Do one of the following:
 - For Android mobile device, select one of the following:
 - **Wipe all data to factory settings.** (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)
 - **Wipe email, calendar and contact list.**—also known as "selective wipe". If you select this option, you can also select **Wipe all data to factory settings if selective wipe failed.** checkbox.
 - For iOS mobile device, select one of the following:
 - **Wipe all data to factory settings.** (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)
 - **Wipe out all the provisioned profiles, policies, configurations, and its related data.**
 - For Windows Phone mobile device, select the following:

- Wipe all data to factory settings. (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)

7. Click **Remote Wipe Device**.

The selected data is deleted from the mobile device and the Mobile Device Agent is unregistered from the server.

Resetting Password Remotely

If a user has forgotten the power-on password, you can remotely reset the password and unlock the mobile device from the Management Server. After the mobile device is successfully unlocked, the user is able to change the power-on password.



Note

This feature is supported on Android, and iOS mobile devices only.

Resetting Password for an Android Mobile Device

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. Select the mobile device from the tree, and then click **Password Reset**.
4. Type and confirm the new six-digit password on the pop-up dialog box that appears.

Removing the Password for an iOS Mobile Device

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Select the mobile device from the tree, and then click **Password Reset**.
4. Click **OK** on the confirmation dialog box that appears. The power on password for the selected iOS mobile device will be removed.

Managing Samsung KNOX Workspace Remotely

You can send commands to manage Samsung KNOX workspaces from Mobile Security management Web console. These commands include creating container, removing container, locking container, unlocking container, and resetting container password. This feature is available for Samsung mobile devices only.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, select a Samsung mobile device from the device tree that you want to manage.
4. Do one of the following:
 - To create KNOX workspace on the mobile device, click **KNOX Operations** > **Create Container**.
 - To remove the workspace from the mobile device, click **KNOX Operations** > **Remove Container**.

- To enable user to reset workspace password, click **KNOX Operations** > **Reset Password**.
- To lock the workspace on the mobile device, click **KNOX Operations** > **Lock Container**.
- To unlock the workspace on the mobile device, click **KNOX Operations** > **Unlock Container**.

Modifying iOS Settings Remotely

You can change the iOS mobile device settings remotely from the administration Web console. These settings include data roaming, voice roaming, personal hotspot.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. On the **Managed Devices** tab, select an iOS mobile device from the device tree that you want to manage.
4. Do one of the following:
 - To enable data roaming, click **iOS Operations** > **Enable Data Roaming**.
 - To disable data roaming, click **iOS Operations** > **Disable Data Roaming**.
 - To enable voice roaming, click **iOS Operations** > **Enable Voice Roaming**.
 - To disable voice roaming, click **iOS Operations** > **Disable Voice Roaming**.
 - To enable personal hotspot, click **iOS Operations** > **Enable Personal Hotspot**.
 - To disable personal hotspot, click **iOS Operations** > **Disable Personal Hotspot**.
 - To start Airplay mirroring, click **iOS Operations** > **Request AirPlay Mirroring**.

- To stop AirPlay mirroring, click **iOS Operations > Stop AirPlay Mirroring**.

Exporting Data

You can export data for further analysis or a backup from the **Managed Devices** tab in **Devices** screen.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Select the mobile device group from the device tree whose data you want to export.
4. Click **Export**.
5. If required, click **Save** on the pop-up that appears to save the **.zip** file on your computer.
6. Extract the downloaded **.zip** file content and open the **.csv** file to view the mobile device information.

Sending Messages to Mobile Devices

You can send a text message to a user or a group from the **Managed Devices** tab in the **Devices** screen.



Note

When you send a text message to an iOS device, the information does not appear on the **Command Queue Management** screen.

Procedure

1. Log on to the Mobile Security administrator Web console.

2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. From the device tree, select the mobile device or the device group to which you want to send a text message.
4. Click **Send Message**.

The **Send a Text Message** screen appears.

5. Type your message in the field provided, and then click **Send**.

Invited Devices Tab

The **Invited Devices** tab in **Devices** screen keeps the record the invitations that Mobile Security has sent to mobile devices for enrollment.

The default invitation email includes the following information:

- Trend Micro Mobile Security introduction
- Mobile Device Agent download URL
- Server information for mobile device to enroll
- QR code for easy enrollment

On the **Invited Devices** tab, you can:

- view the invitation list
- resend invitation messages to mobile devices
- cancel the current invitations
- remove the old invitation records

Viewing the Invitation List

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. Click the **Invited Devices** tab.

The following table provides the description of all the invitation statuses displayed on the **Invited Devices** tab.

INVITATION STATUS	DESCRIPTION
Active	The invitation is valid and the user can use the information in the invitation message to enroll.
Expired	The invitation has expired and the user can no longer use the information in the invitation message to enroll.
Used	The user has already used the information in the invitation message to enroll and the Enrollment Key has become invalid.  Note This status will only appear when the Enrollment Key usage limitation option is set to Use for one time in Device Enrollment Settings.
Canceled	The invitation is canceled from the server and the user cannot use the information in the invitation message to enroll.

Resending Invitation Messages

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Invited Devices** tab.
4. Select the mobile devices from the list whom you want to resend the invitation message.
5. Click **Resend Invitation**.

Canceling Active Invitations

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Invited Devices** tab.
4. Select the mobile devices from the list for which you want to cancel the invitation.
5. Click **Cancel Invitation**.

Remove Invitations from the List



Note

You can only remove the invitation message whose status is **Used** or **Canceled**.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Invited Devices** tab.
4. Select the mobile devices from the list whose invitation record you want to remove.
5. Click **Remove Invitation**.

Exchange ActiveSync Devices Tab

After enabling the Exchange Server Integration on the Mobile Security Management Server, the **Exchange ActiveSync Devices** tab on **Devices** screen displays the list of mobile devices that connect to the Exchange Server through ActiveSync service.

On the **Exchange ActiveSync Devices** tab, you can perform the following actions:

- Invite mobile devices
- Allow or block access to Exchange Server
- On-demand remote wipe
- Cancel remote wipe command
- Remove mobile devices from the list

Inviting Exchange ActiveSync Mobile Devices

Before inviting Exchange ActiveSync mobile devices, make sure that you have configured the notification/reports settings on the Management Server. Refer to the topic *Configuring Notifications & Reports Settings* in the *Installation and Deployment Guide*.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.
4. Select a mobile device that you want to invite to access Exchange ActiveSync.
5. Click **Invite**, and then click **OK** on the confirmation screen.

Mobile Security sends email messages to the user of the invited mobile device. After the mobile device enrolls to the Mobile Security Management Server, the **Managed Device** column displays the status of the mobile device agent.

Allowing or Blocking Access to Exchange Server

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.
4. Select a mobile device for which you want to allow or block access to Exchange Server.
5. Click **Allow Access** or **Block Access** and then click **OK** on the confirmation dialog box.

The mobile device status in the **Exchange Access State** column displays the new status after the mobile device syncs with the Exchange Server.

Wiping a Remote ActiveSync Mobile Device

You can remotely reset the ActiveSync mobile device to factory settings and clear the mobile device internal memory/SD card. This feature helps ensure the security of the data for lost, stolen or misplaced mobile devices.



WARNING!

Be careful when you use this feature as the action CANNOT be undone. All data will be lost and unrecoverable.

For instructions on wiping a mobile device that does not use ActiveSync, see [Wiping a Remote Mobile Device on page 3-15](#).

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. Click the **Exchange ActiveSync Devices** tab.
4. Select the mobile device that you want to wipe.
5. Click **Remote Wipe**.

The **Remote Wipe Device** screen pops up.

6. Select the device and then click **Remote Wipe Device**.

Removing an ActiveSync Mobile Device

The mobile device that you have remotely wiped from the Mobile Security Management Server will no longer be able to access the Exchange Server. You can remove such mobile device information from the **Exchange ActiveSync Devices** tab on the **Devices** screen.

**Note**

You can only remove mobile devices that are remotely wiped from the Mobile Security Management Server.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.
4. Select the mobile device that you want to remove from the list.
5. Click **Remove**, and then click **OK** on the confirmation screen.

Device Enrollment Program Tab

The Device Enrollment Program (DEP) provides a fast, streamlined way to deploy your corporate-owned iOS mobile devices. You can enroll your organization into the DEP program.

Trend Micro Mobile Security integrates with Apple Device Enrollment Program to streamline the enrollment of company-issued iOS 7 and iOS8 mobile devices purchased directly from Apple. If you have configured the integration with the Device Enrollment Program, the users who are issued a corporate-owned iOS mobile devices are prompted to enroll with Mobile Security when they configure the mobile device using iOS activation process.

Integrating Mobile Security with DEP means that you do not need to communicate the enrollment instructions to the users, but still ensure that all the mobile devices are enrolled on the their first use. Additionally, this integration also removes the associated support cost.

Device Enrollment Program User Experience

If you configure Mobile Security integration with the Apple's Device Enrollment Program, the user experience is as follows:

- A user receives a new company-issued iOS mobile device, unpacks it, and switches it on.
- The mobile device connects to Apple.
- From the mobile device ID, the Apple servers detect that the device has been added to your Device Enrollment Program account and send device settings and connection details for your Mobile Security deployment.
- The user then uses the iOS Setup Assistant to complete the initial activation of the mobile device, which includes enrollment with Mobile Security.

You can determine the screens that appear in the iOS Setup Assistant when you configure integration with the Device Enrollment Program. This enables you to further streamline the activation process by skipping screens for settings that you configure through device management. For example, if you plan to require that Location Services is enabled on the devices as part of a geo-fencing configuration, you can configure the iOS Setup Assistant to skip the screen that lets users choose whether to enable Location Services.

As part of the device activation process, the user is prompted to enroll with Mobile Security. The user does not need to enter credentials or an email address, and does not need to know connection details for Mobile Security. A specific Device Enrollment Program profile that admin creates automatically when you configure integration with the Device Enrollment Program is deployed to the device.

Setting Up Mobile Security for the Device Enrollment Program

Before you can configure Mobile Security for the Device Enrollment Program (DEP), make sure that you have already enrolled your organization to the DEP program on the following Apple Web site:

<http://deploy.apple.com/>

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Devices** on the menu bar.

The **Devices** screen appears.
3. Click the **Device Enrollment Program** tab.
4. Click **Settings**.
5. Click the **Download** link before **Public Key** to download the public key to the local computer from Mobile Security Management Server.
6. Click the **Apple Deployment Programs** link before **Deployment**.

The **Apple Deployment Programs** Web portal opens in the Internet Web browser.
7. Sign in to your **Device Enrollment Program** account and create a new MDM server using the public key you downloaded from the Mobile Security Management Server. Refer to the following document for the detailed steps to enroll to the Device Enrollment Program.

https://www.apple.com/iphone/business/docs/DEP_Business_Guide_EN_Feb14.pdf
8. On the MDM server, generate an access token and save the token file to a suitable location, and then assign mobile devices for enrollment to the MDM server.
9. Upload the token file you generated through the **Apple Deployment Programs** Web portal to the Mobile Security Management Server. Wait until the upload completes.

After the upload completes, the **Device Enrollment Program Settings** screen appears.
10. Under the **Device Enrollment Program Detail** section, configure the following setup profile settings for mobile devices.
 - **Profile name:** a name for the setup profile displayed on the mobile device.
 - **Require supervision:** to place the mobile devices enrolled through the Device Enrollment Program to the supervised mode.

- **Removable configuration:** to allow users to remove the device management configuration from devices enrolled through the Device Enrollment Program.
- **Allow pairing:** to enable devices enrolled through the Device Enrollment Program to be managed through Apple tools such as iTunes and Apple Configurator.
- **Mandatory configuration:** to prevent users from skipping the Mobile Security enrollment step in the device activation process.
- **Business unit:** the name of the department to which the mobile device is assigned to.
- **Unique service ID:** if you have multiple Mobile Security deployments, enter in the Unique service ID box a name that uniquely identifies the deployment you are configuring.
- **Support phone number:** the phone number for users to call for assistance.
- **Required setup items:** the setup items that are required for the users to configure. By default, all the setup items are required. If you disable any of these items, the users will be able to skip that item during setup.

11. Click **Save**.

Mobile Security Management Server synchronizes the mobile device list with the Apple Device Enrollment Programs server and displays the mobile devices on the **Devices Enrollment Program** tab on **Devices** screen.

Integration with Trend Micro Control Manager

Trend Micro Mobile Security provides integration with Trend MicroControl Manager (also referred to as Control Manager or TMCM). This integration enables the Control Manager administrator to:

- create, edit or delete security policies for Mobile Security
- deliver security policies to enrolled mobile devices
- view Mobile Security **Dashboard** screen

For the detailed information about Trend MicroControl Manager and handling Mobile Security policies on Control Manager, refer to the product documentation at the following URL:

<http://docs.trendmicro.com/en-us/enterprise/control-manager.aspx>

Creating Security Policies in Control Manager

The Trend Micro Control Manager Web console displays the same security policies that are available in Mobile Security. If a Control Manager administrator creates a security policy for Mobile Security, Mobile Security will create a new group for this policy and move all the target mobile devices to this group. To differentiate the policies that are created in Mobile Security with the policies created in Control Manager, Mobile Security adds a prefix **TMCM_** to the group name.

Deleting or Modifying Security Policies

The Control Manager administrator can modify a policy at any time and the policy will be deployed to the mobile devices immediately.

Trend Micro Control Manager synchronizes the policies with Trend Micro Mobile Security after every 24 hours. If you delete or modify a policy that is created and deployed from Control Manager, the policy will be reverted to the original settings or created again after the synchronization occurs.

Security Policy Statuses on Control Manager

On the Trend Micro Control Manager Web console, the following statuses are displayed for the security policies:

- **Pending:** The policy is created on the Control Manager Web console and has not yet been delivered to the mobile devices.
- **Deployed:** The policy has been delivered and deployed on all the target mobile devices.

Chapter 4

Protecting Devices with Policies

This chapter shows you how to configure and apply security policies to mobile devices in a Mobile Security group. You can use policies related to provisioning, device security and data protection.

The chapter includes the following sections:

- *About Security Policies on page 4-3*
- *Managing Policies on page 4-4*
- *Common Policy on page 4-8*
- *Wi-Fi Policy on page 4-9*
- *Exchange ActiveSync Policy on page 4-9*
- *VPN Policy on page 4-10*
- *Global HTTP Proxy Policy on page 4-10*
- *Certificate Policy on page 4-10*
- *Single Sign-On Policy on page 4-10*
- *AirPlay/AirPrint Policy on page 4-11*
- *Cellular Network Policy on page 4-12*
- *Theme Policy on page 4-12*

- *Managed Domain Policy on page 4-12*
- *Malware Protection Policy on page 4-13*
- *Spam Prevention Policy on page 4-14*
- *Call Filtering Policy on page 4-16*
- *Web Threat Protection Policy on page 4-18*
- *Privacy Protection Policy on page 4-19*
- *Password Policy on page 4-19*
- *Feature Lock Policy on page 4-19*
- *Compliance Policy on page 4-20*
- *Application Monitor and Control Policy on page 4-20*
- *Volume Purchasing Program Policy on page 4-22*
- *Container Policy on page 4-23*

About Security Policies

You can configure security policies for a Mobile Security group on the Management Server. These policies apply to all mobile devices in the group. You can apply security policies to all Mobile Security groups by selecting the **Mobile Devices** group (the root group). The following table lists the security policies available in Mobile Security.

TABLE 4-1. Security Policies in Mobile Security

POLICY GROUP	POLICY	REFERENCE
General	Common Policy	See Common Policy on page 4-8 .
Provisioning	Wi-Fi Policy	See Wi-Fi Policy on page 4-9 .
	Exchange ActiveSync Policy	See Exchange ActiveSync Policy on page 4-9 .
	VPN Policy	See VPN Policy on page 4-10 .
	Global HTTP Proxy Policy	See Global HTTP Proxy Policy on page 4-10 .
	Certificate Policy	See Certificate Policy on page 4-10 .
	Single Sign-On Policy	See Single Sign-On Policy on page 4-10 .
	AirPlay/AirPrint Policy	See AirPlay/AirPrint Policy on page 4-11 .
	Cellular Network Policy	See Cellular Network Policy on page 4-12 .
	Theme Policy	See Theme Policy on page 4-12 .

POLICY GROUP	POLICY	REFERENCE
Device Security	Malware Protection Policy	See Malware Protection Policy on page 4-13 .
	Spam Prevention Policy	See Spam Prevention Policy on page 4-14 .
	Call Filtering Policy	See Call Filtering Policy on page 4-16 .
	Web Threat Protection Policy	See Web Threat Protection Policy on page 4-18 .
Devices	Password Policy	See Password Policy on page 4-19 .
	Feature Lock Policy	See Feature Lock Policy on page 4-19 .
	Compliance Policy	See Compliance Policy on page 4-20 .
Application Management	Application Monitor & Control Policy	See Application Monitor and Control Policy on page 4-20 .
	Volume Purchasing Program Policy	See Volume Purchasing Program Policy on page 4-22 .
Samsung KNOX	Container Policy	See Container Policy on page 4-23 .

Managing Policies

Mobile Security enables you to quickly create a policy using the default security policy templates.

Use the **Policy** screen to create, edit, copy or delete security policies for mobile devices.

Creating a Policy

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Policies** on the menu bar.
The **Policy** screen displays.
3. Click **Create**.
The **Create Policy** screen displays.
4. Type the policy name and description in their respective fields and then click **Save**.
Mobile Security creates a policy with the default settings. However, the policy is not assigned to a group. To assign the policy to a group, see *Assigning or Removing Policy from a Group on page 4-6*.
5. (Super Administrator only) If you want to use this policy as a template, click the arrow button under the **Type** column on the **Policy** screen. The group administrators can use templates created by the Super Administrator to create policies for their assigned groups.



Note

- You cannot assign a template to any group.
- You can also convert a template to policy. However, you can only convert a template to policy if the template is not assigned to any group.

Editing a Policy

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. In the policy list, click the policy name whose details you want to edit.

The **Edit Policy** screen displays.

4. Modify the policy details and then click **Save**.

Assigning or Removing Policy from a Group

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. In the **Applied Groups** column of a policy, click the group name. If the policy is not assigned to a group, click **None**.

4. Do one of the following:

- To assign a policy to a group: from the **Available groups** list on the left side, select the group to which you want to apply the policy, and then click **>** to move the group to the right side.
- To remove policy from a group: from the group list on the right side, select a group that you want to remove, and then click **<** to move the group to the **Available groups** list on the left side.

5. Click **Save**.

Copying a Policy

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. Select the policy that you want to copy, and then click **Copy**.

Deleting Policies

You cannot delete the **Default** policy and any policy that is applied to a group. Make sure to remove the policy from all the groups before deleting a policy. See *Assigning or Removing Policy from a Group on page 4-6* for the procedure.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. Select the policy that you want to delete, and then click **Delete**.

Configuring Application Availability

Mobile Security enables you to configure apps that you want to make available on iOS and Android mobile devices for a particular policy.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. Click the number of apps for the policy, under the **Available Apps** column.

The **Available Apps** screen displays.

4. Click **iOS Applications** or **Android Applications** tab.
5. Do one of the following:
 - To enable or disable an app, click on the button under the **Permission** column for the app to toggle.
 - To enable or disable all apps, click **Enable All** or **Disable All**.
6. then toggle the availability of a application in the Permission column.

Security Policies in Mobile Security

This section introduces the security policies that are available in Mobile Security.

Using the superuser account, you can specify any policy as a template for group admins to create further security policies in Mobile Security. However, once you specify a security policy as a template, you cannot assign that security policy to any group.

Common Policy

Common Policy provides the common security policies for mobile devices. To configure common security policy settings, click **Policies**, then click the policy name, and then click **Common Policy**.

- **User Privileges:** You can enable or disable the feature that allows users to uninstall the Mobile Device Agent. Additionally, you can select whether to allow users to configure Mobile Security device agent settings.

The following is a list of features associated with uninstall protection:

- turn On/Off uninstall protection from the administration console
- password length must have a minimum of six (6) and a maximum of twelve (12) characters; password may contain numbers, characters or symbols.
- password can be set for each group from the administration console.

If you do not select the **Allow users to configure Mobile Security client settings** check box, users cannot change Mobile Device Agent settings. However, the

filtering lists for **Spam Prevention Policy**, **Call Filtering Policy** and **Web Threat Protection Policy** are not affected when this option is selected. For more information, see *Spam SMS Prevention Policies on page 4-14*, *Spam WAP-Push Prevention Policies on page 4-15* and *Web Threat Protection Policy on page 4-18*.

- **Update Settings:** You can select to have the Mobile Security Management Server notify Mobile Device Agents when a new component is available for update. Or you can select the auto-check option to have Mobile Device Agents periodically check for any component or configuration updates on the Mobile Security Management Server.

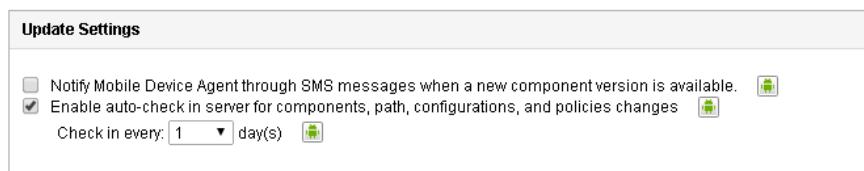


FIGURE 4-1. Common Policy, Update Settings section

- **Log Settings:** When Mobile Device Agents detect a security risk, such as a malware on Android operating system, a log is generated on the mobile device.

Wi-Fi Policy

Wi-Fi Policy enables you to deliver your organization's Wi-Fi network information to Android and iOS mobile devices; including the network name, security type and password.

To configure Wi-Fi policy settings, click **Policies**, then click the policy name, and then click **Wi-Fi Policy**.

Exchange ActiveSync Policy

Exchange ActiveSync Policy enables you to create an Exchange ActiveSync policy for your organization and deliver it to iOS mobile devices.

To configure Exchange ActiveSync policy settings, click **Policies**, then click the policy name, and then click **Exchange ActiveSync Policy**.

VPN Policy

VPN policy settings enable you to create a VPN Policy for your organization and deliver it to iOS mobile devices.

To configure VPN policy settings, click **Policies**, then click the policy name, and then click **VPN Policy**

Global HTTP Proxy Policy

Global HTTP Proxy Policy enables you to deliver your organization's proxy information to mobile devices. This policy only applies to iOS mobile devices that are in supervised mode.

To configure global HTTP proxy policy settings, click **Policies**, then click the policy name, and then click **Global HTTP Proxy Policy**

Certificate Policy

Certificate Policy enables you to import certificates that you need to deploy on iOS mobile devices.

To configure certificate policy settings, click **Policies**, then click the policy name, and then click **Certificate Policy**.

Single Sign-On Policy

Single sign-on (SSO) policy enables the users to use the same credentials across applications, including Mobile Security and applications from the App Store. Each new application configured with SSO certification verifies user permissions for enterprise resources, and logs users in without requiring them to reenter their passwords.

The single sign-on policy includes the following information:

- **Name:** the Kerberos principal name.
- **Realm:** The Kerberos realm name.

The Kerberos realm name should be properly capitalized.

- **URL Prefixes** (Optional): List of URLs that must be matched in order to use an account for Kerberos authentication over HTTP. If this field is blank, the account is eligible to match all http and https URLs. The URL matching patterns must begin with either http or https.

Each entry of this list must contain a URL prefix. Only the URLs that begin with one of the strings in an account are allowed to access the Kerberos ticket. URL matching patterns must include the scheme. For example, http://www.example.com/. If a matching pattern does not end in /, it will automatically add a / to the URL.

- **Application Identifiers** (Optional): List of application identifiers that are allowed to use the account. If this field is blank, this account matches all application identifiers.

The **Application Identifiers** array must contain strings that match application bundle IDs. These strings may be exact matches (such as com.mycompany.myapp) or may specify a prefix match on the bundle ID by using the * wildcard character. The wildcard character must appear after a period character (.), and may appear only at the end of the string (such as com.mycompany.*). When a wildcard is used, any application whose bundle ID begins with the prefix is granted access to the account.

To configure Single Sign-On Policy for iOS settings, click **Policies**, then click the policy name, and then click **Single Sign-On Policy**.

AirPlay/AirPrint Policy

AirPlay/AirPrint policy settings enable you to create AirPlay and AirPrint policies for your organization and deliver it to iOS mobile devices.

To configure AirPlay and/or AirPrint policy settings, click **Policies**, then click the policy name, and then click **AirPlay/AirPrint Policy**.

Cellular Network Policy

Celluar network policy settings enables you to configure cellular network settings for your organization and deliver it to iOS mobile devices.

To configure the celluar network policy settings, click **Policies**, then click the policy name, and then click **Celluar Network Policy**.

Theme Policy

Theme policy settings enable you to push a font and set a wallpaper for home screen and lock screen for the iOS mobile devices. This policy applies to iOS mobile devices that are in the supervised mode only.

To configure theme policy settings, click **Policies**, then click the policy name, and then click **Theme Policy**.

Managed Domain Policy

Managed domain policy enables you to configure the email and/or Web domains that your organization manages.

- **Unmarked Email Domains:** When a user is composing an email using the system email client, any email address entered which does not match the configured domains will be highlighted (marked) in red. Administrators should consider using this functionality, to warn users who may be inadvertently attempting to send sensitive information to untrusted email addresses.
- **Managed Safari Web Domains:** You can specify that files downloaded from specific domains using Safari may only be opened with managed apps. For example, a PDF downloaded from internal.example.com may be opened with Adobe Reader (a managed app) but not Dropbox (an unmanaged app). This provides improved containerization of Safari and wider the use as an enterprise browser.

**Important**

You must disable the following iOS features in the Feature Lock Policy. Otherwise, the managed Safari Web domains settings will not have any effect, since the downloaded files can be opened with other (unmanaged) apps:

- Open documents from managed apps in other apps (7.0 or above)
- Open documents from other apps in managed apps (7.0 or above)

To configure managed domain policy settings, click **Policies**, then click the policy name, and then click **Managed Domain Policy**.

Malware Protection Policy

You can configure threat protection policies that include: Scan type (real-time and card scan), action taken for malware, number of compression layers to scan, and the File type.

To configure malware protection policy settings, click **Policies**, then click the policy name, and then click **Malware Protection Policy**.

- **Scan Types:** Mobile Security provides several types of scans to protect mobile devices from malware.
 - **Real-time Scan:** Mobile Device Agent scans files on mobile devices in real time. If Mobile Device Agent detects no security risk, users can proceed to open or save the file. If Mobile Device Agent detects a security risk, it displays the scan result, showing the name of the file and the specific security risk. Mobile Security will generate a log with the scan result on the mobile device. The scan log is sent and stored on the Mobile Security database.
 - **Scan after pattern update:** If you select the this option in the **Malware Protection Policy** screen, Mobile Security will run an automatic-scan for security threats after successful pattern update on Android mobile devices.
- **Scan Options**
 - **Scan installed applications only:** Select this option if you want to scan installed applications only.

- **Scan installed applications and files:** Select this option if you want to scan installed applications and other files on mobile device's storage, and then select whether to scan only APK files or all files.

Spam Prevention Policy

The spam prevention policy in Mobile Security provides protection against spam WAP-push and SMS text messages.

To configure spam prevention policy settings, click **Policies**, then click the policy name, and then click **Spam Prevention Policy**.

Spam SMS Prevention Policies

This feature provides you server-side control of SMS spam prevention policies. The following features are available when configuring the SMS Spam Prevention Policies:

- enable or disable spam SMS prevention for mobile device
- configure the mobile device to use a blocked list, approved list or disable the SMS anti-spam feature for mobile device.
- configure an approved list from the administration console
- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

TABLE 4-2. Filtering list configuration for Spam SMS Prevention Policy

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Disabled	Enabled	<p>The user can edit the approved/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Enabled	Disabled	<p>The user is only allowed to edit the approve/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> 1. Approved List or Blocked List on server 2. Approved List on Mobile Device Agent 3. Blocked List on Mobile Device Agent
Enabled	Enabled	<p>The user can view or edit the approved/blocked list defined by the administrator and can also use the approved/blocked list on the mobile device agent.</p> <p>When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent 3. Approved List or Blocked List on server



Note

The SMS approved and blocked list must use the format: "[name1:]number1; [name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.

Spam WAP-Push Prevention Policies

This feature provides you server-side control of WAP-Push Protection. If enabled, you can select whether to use a WAP approved list. The following features is a list of features available when configuring WAP-Push Protection policies:

- enable or disable WAP-Push protection for mobile device
- configure the mobile device to use an approved list or disable WAP-Push protection on the mobile device
- configure an approved list from the administration console
- if the administrator has enabled server-side control, the user will be unable to change the WAP-Push protection type defined by the administrator
- if the administrator has disable server-side control, and allowed users to configure Mobile Security settings on mobile device, the user will be unable to view or edit the WAP-Push protection list configured by the administrator, and may edit the personal WAP-Push protection list on the mobile device side

The personal settings will be cleared after server policy is delivered to a mobile device.



Note

The WAP approved list must use the format: "[name1]:number1;[name2]:number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.



Note

The users' personal settings for spam messages will be cleared after the spam prevention policy is applied on the Mobile Device Agents.

Call Filtering Policy

This feature provides you server-side control of call filtering policies. To configure call filtering policy settings, click **Policies**, then click the policy name, and then click **Filtering Policy**.

The following features are available when configuring the Call Filtering Policies:

- enable or disable call filtering for mobile device
- configure the mobile device to use a blocked list or an approved list

- configure an approved list from the administration console
- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

TABLE 4-3. Filtering list configuration for Call Filtering Policy

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Disabled	Enabled	<p>The user can edit the approved/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the URLs based on the following priority:</p> <ol style="list-style-type: none">1. Approved List on Mobile Device Agent2. Blocked List on Mobile Device Agent
Enabled	Disabled	<p>The user is only allowed to edit the approved/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the incoming calls based on the following priority:</p> <ol style="list-style-type: none">1. Blocked List on server2. Approved List on Mobile Device Agent3. Blocked List on Mobile Device Agent <p>You can also configure server-side control for outgoing calls on Android mobile devices.</p>

CENTRAL CONTROL	USER CONTROL	DESCRIPTION
Enabled	Enabled	<p>The user can view or edit the approved/blocked list defined by the administrator and can also use the approved/blocked list on the mobile device agent.</p> <p>When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies.</p> <p>Mobile Security allows or blocks the incoming calls based on the following priority:</p> <ol style="list-style-type: none"> 1. Approved List on Mobile Device Agent 2. Blocked List on Mobile Device Agent 3. Blocked List on server <p>You can also configure server-side control for outgoing calls on Android mobile devices.</p>



Note

The call filtering approved and blocked list must use the format: "[name1]:number1; [name2]:number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (,) and spaces. The maximum number of entries should not exceed 200.

Web Threat Protection Policy

Enables you to manage Web threat protection policy from the Mobile Security Management Server and deploys it on Android and iOS mobile devices. It also enables Android mobile devices to send the Web threat protection log back to the server.

To configure Web Threat Protection Policy settings, click **Policies**, then click the policy name, and then click **Web Threat Protection Policy**.

Privacy Protection Policy

You can use privacy protection settings to enable manual privacy scan on Android mobile devices and force mobile devices to upload privacy scan logs to Mobile Security Management Server. You can also scan and fix your Facebook privacy settings on iOS and Android mobile devices, to make sure that your information and shared material is only available to the people you trust.

To configure privacy protection policy settings, click **Policies**, then click the policy name, and then click **Privacy Protection Policy**.

Password Policy

The password policy prevents unauthorized access to data on mobile devices.

To configure password policy settings, click **Policies**, then click the policy name, and then click **Password Policy** from the left-menu.

Feature Lock Policy

With this feature, you can restrict (disable) or allow (enable) the use of certain mobile device features/components. For example, you can disable the camera for all mobile devices in a particular group.

To configure Feature Lock Policy settings, click **Policies**, then click the policy name, and then click **Feature Lock Policy** from the left-menu.

See [Supported Mobile Device OS Features on page 1-21](#) for the list of supported features/components.



WARNING!

Use caution while disabling WLAN/WIFI and/or Microsoft ActiveSync. The mobile device may not be able to communicate with the server if both these options are unavailable.

For Android mobile devices, you can also add access point(s) to control the availability of the device components within the range of those access point(s).

Compliance Policy

Compliance policy enables you to set the compliance criteria for the mobile devices. If any mobile device does not match the criteria, Mobile Security displays its non-compliant status on the server UI. Mobile Security also sends an email to the non-compliant iOS mobile device, while it displays a notification on non-compliant Android mobile devices. The compliance check list includes:

- **Rooted/Jailbroken**—checks whether the mobile device is rooted/jailbroken or not.
- **Unencrypted**—checks whether the encryption is enabled on the mobile device or not
- **OS version check**—checks whether the OS version matches the defined criteria or not.

To configure compliance policy settings, click **Policies**, then click the policy name, and then click **Compliance Policy**.

Application Monitor and Control Policy

Application monitor and control policies provide you server-side control of the applications installed on mobile devices and push the required applications to the mobile devices.

To configure application monitor and control policy settings, click **Policies**, then click the policy name, and then click **Application Monitor and Control Policy**.

- **Required Applications**—using this option will push all the applications that you add in the list, to the mobile devices. You can also link a VPN to applications, so that the applications always use this VPN to connect to the network.
- **Permitted Applications**—control the applications installed on mobile devices by using approved and blocked lists.

For iOS mobile devices, Mobile Security sends notification to administrator and the user for any application that does not comply with the policy.

For Android mobile devices, Mobile Security blocks the application that does not comply with the policy and will allow all others.

- **Enable system apps blocking** (Android only):

if selected, Mobile Security will block all the system apps on Android mobile devices.

- **Enable Application Category:** select the application category that you want to enable or disable on mobile devices. You can also make the exception by adding the applications that belong to these categories to the approved or blocked list. For example, if you have disabled a category type Games, Mobile Security will block all the applications that belong to this category, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they belong to the category that you have disabled.
2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they belong to the category that you have enabled.
3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the category that they belong to.

- **Enable Application Permissions** (for Android only): select the application services that you want to enable or disable on Android mobile devices. You can also make the exception by adding the applications that use these services to the approved or blocked list. For example, if you have disabled service type **Read Data**, Mobile Security will block all the applications that use the Read Data service, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they use the services that you have disabled.

2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they use the services that you have enabled.
3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the services that they use.

- **Only allow the following applications**: add the applications to the approved list that you want to allow users to use on their mobile devices. If enabled:
 - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are not in the approved list.
 - On iOS mobile devices, if Mobile Security detects any application that is not in the approved list, Mobile Security sends an email notification to the user.
- **Only block the following applications**: add the applications to the blocked list that you do not want users to use on their mobile devices. If enabled:
 - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are in the blocked list.
 - On iOS mobile devices, if Mobile Security detects any application that is in the blocked list, Mobile Security sends an email notification to the user.
- **Lock to App (for Supervised Mode Only)**—restrict the iOS mobile device to the specified application.

Mobile Security checks for restricted applications and sends email alert to the users:

- automatically according to the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**, or
- when you update the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**.

Volume Purchasing Program Policy

This policy enables the administrator to import the iOS applications to the Mobile Security administration Web console that are purchased through the Apple's Volume

Purchase Program. Mobile Security will push all the applications in the Volume Purchasing Program List to mobile devices in a group.

To configure Volume Purchasing Program policy:

1. Add applications to the Enterprise App Store. See [Adding an Application on page 5-2](#) for the procedure.
2. Click **Policies**, then click the policy name, and then click **Volume Purchasing Program Policy**.
3. Click **Import** and then select applications to import from the Enterprise App Store.
4. Click **Save** to push all the applications to the iOS mobile devices.

Container Policy

This policy enables you to manage Samsung KNOX container security settings. You can configure approved list or blocked list for accounts, apply restrictions, and configure browser, password, and application settings.



Note

You must configure KNOX license in Mobile Security before enabling this policy. To configure the KNOX license, navigate to **Administration > Product License** on the administration Web console.

- **Account Settings:** Specify accounts that can be added or restricted on Samsung KNOX containers by using approved and/or blocked lists.
- **Restriction Settings:** Disable camera or file sharing on Samsung KNOX containers.
- **Browser Settings:** Configure security settings for the native Android Web browser on Samsung KNOX containers.
- **Password Settings:** Configure password security settings for Samsung KNOX container.
- **Application Settings:** Configure the following lists:

- **Filter Applications List:** Configure approved list or blocked list to restrict applications installation on Samsung KNOX container.
- **Required Applications:** Configure the required applications list to specify applications that must be installed on Samsung KNOX.
- **Disable Applications:** Configure the disable applications list to disable certain applications on the mobile device. If the applications on this list are installed on the mobile device, they will not be removed, but the user will not be able to use these applications.

To configure container policy settings, click **Policies**, then click the policy name, and then click **Container Policy**.

Chapter 5

Managing Enterprise App Store

This chapter shows you how to manage the store for enterprise applications for iOS and Android mobile devices.

The chapter includes the following sections:

- *About Enterprise App Store on page 5-2*
- *Managing Enterprise Applications on page 5-2*
- *Managing Application Categories on page 5-5*
- *Managing Apps Purchased through the Volume Purchase Program on page 5-6*

About Enterprise App Store

The Enterprise App Store enables you to create a list of webclips and apps for the users to download and install on their Android or iOS mobile devices.

You can also upload iOS applications purchased through Apple's Volume Purchase Program to the Enterprise App Store on the Mobile Security administration Web console.

Managing Enterprise Applications

Adding an Application

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.

The **Enterprise App Store** screen displays.

3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Click **Add**.

The **Add Application** window displays.

5. You can now add an application to the list using one of the following options:
 - **Add from local computer**—select an installation file for Android or iOS mobile devices.
 - **Add a Webclip**—type the application's URL and the application's icon will appear on the home screen of user's mobile device, and the link will open in the default Web browser on the mobile device.
 - (Android) **Add from external application store**—type the link to the application in an external app store. The application's icon will appear on the

home screen of user's mobile device, and the link will open in the default Web browser on the mobile device.

- (iOS) **Please input search keyword**—type the name of the VPP application you want to search and select a country to search the application in its Apple app store, and then select the application you want to add from the search results. Once added, the VPP application is only available in the **App Store** on Mobile Security administration Web console. To push the application to mobile devices, you will need to add the application to the **Volume Purchasing Program Policy**. See *Volume Purchasing Program Policy on page 4-22* for the procedure.

6. Click **Continue**.

The **Edit Application** screen displays.

7. Configure the following:

- **Application name:** type a name for the application.
- **Application icon:** if the application icon does not appear, click **Upload app icon** to select and upload the application icon.
- **Application ID:** if the application ID does not appear, type the application ID.
- **VPP codes file:** For iOS VPP application, upload the Volume Purchase Code files that you have received from Apple.
- **Category:** select a category for the application.



Note

You must select a category from the drop-down list. To add or delete a category, click the **Category** button.

- **Description:** type the description for the application.
- **Publish:** select one of the following:
 - **Do not publish**—to upload the application on the server, but keep hidden from the mobile devices.

- **Publish as production version**—to upload the application on the server, and publish it for mobile devices to download.
- **Publish as beta version**—to upload the application on the server, and publish it as a beta version for mobile devices to download.
- **Screenshots**: select and upload application screenshots.

8. Click **Continue**.

The application appears in the applications list.

Editing Application Information

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Click the application name whose information you want to edit.
The **EditApplication** window displays.
5. Modify the details on the screen.
6. Click **Continue**.

Deleting Applications from the App Store

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.

The **Enterprise App Store** screen displays.

3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Select the applications that you want to delete.
5. Click **Delete** and then click **OK** on the confirmation dialog box.

Managing Application Categories

Adding an Application Category

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Click **Manage Category**.
5. Click **Add**.
The **Add Category** window displays.
6. Type the category name and description and then click **Save**.

Editing an Application Category

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.

The **Enterprise App Store** screen displays.

3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Click **Manage Category**.
5. Click the category name that you want to edit.

The **Edit Category** window displays.

6. Modify the category details, and then click **Save**.

Deleting an Application Category

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.

The **Enterprise App Store** screen displays.

3. Click the **iOS Applications** tab or **Android Applications** tab.
4. Click **Manage Category**.
5. Select the categories that you want to delete, click **Delete**, and then click **OK** on the confirmation dialog box.

Managing Apps Purchased through the Volume Purchase Program

Apple uses redemption codes and the Volume Purchase Program (VPP) licenses for the volume purchase of apps. Since you cannot convert the redemption codes into VPP licenses, Mobile Security supports both of these options.

The Volume Purchase Program enables you to distribute VPP licenses to users for iOS apps.

You can manage VPP apps by monitoring the number of remaining licenses and by reclaiming licenses. Users can use VPP apps even if they have not installed the Mobile Security client application on their mobile devices.

**Note**

Mobile Security does not push VPP apps to mobile devices. Users need to download them manually to their mobile devices from the Apple App Store from the following location:
App Store > Update > Purchased.

**Important**

VPP is only available in certain regions. Make sure that your organization qualifies. Refer to the following link for the details:

<http://www.apple.com/business/vpp/>

Setting Up Volume Purchase Program Licenses

Procedure

1. Navigate to the following URL:
<http://www.apple.com/business/vpp/>
2. Sign in with your Apple account and download the service token file from the Apple Volume Purchase Program Web portal.
3. Log on to the Mobile Security administration Web console.
4. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
5. Click the **iOS Applications (tab) > Volume Purchase Program (VPP) Management > VPP Setting**.
6. Upload the token file you downloaded from the Apple Web portal in the field provided, and wait until the upload completes.

7. Click **Sync Now**.

Assigning VPP Applications to Users

Before you are able to assign applications to the users, make sure that the you have already set up the Volume Purchase Program Licences in Mobile Security. See [Setting Up Volume Purchase Program Licenses on page 5-7](#).

This procedure sends a notification to users at the end of configuration. If you want to modify the user notification, navigate to the following screen: **Notification & Reports** > **User Notifications** > **VPP User Notification**.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab.
4. Click the **iOS Applications** (tab) > **Volume Purchase Program (VPP) Management** > **Application List**.
5. Click **Assign User** link for the application that you want to assign to users.
The **User List** screen displays.
6. Search user names and then move your selected users to the **Selected users** list on the right, and then click **Assign**.
7. Click **Close** on the **User List** screen.
Mobile Security sends an invitation email to the assigned user, which includes a URL for the user to join the Apple Volume Purchase Program.

Reclaiming Volume Purchase Program Applications

Mobile Security enables you to reclaim application licences purchased through the Volume Purchase Program from users.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab.
4. Click the **iOS Applications (tab) > Volume Purchase Program (VPP) Management > Application List**.
5. In the **License Used** column, click the number of licenses.
The **User List** screen displays.
6. Select the users from the list, and then click **Reclaim**.
7. Click **Close** on the **User List** screen.

Checking Status for VPP Users

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab.
4. Click the **iOS Applications (tab) > Volume Purchase Program (VPP) Management > VPP User List**.

5. In the **Status** column, see the statuses for the users. The **Status** column may display one of the following statuses:
 - - : You have not yet assigned any application to this user.
 - **Registered**: You have assigned at least one application to the user, but the user has not yet associated the Apple ID with the email address.
 - **Associated**: You have assigned at least one application to the user and the user has already associated the Apple ID with the email address.
 - **Retired**: You have reclaimed all the licences assigned to this user.

Reclaiming All Licences from a User

Mobile Security enables you to reclaim all the licences from a user.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **App Store** on the menu bar.
The **Enterprise App Store** screen displays.
3. Click the **iOS Applications** tab.
4. Click the **iOS Applications (tab)** > **Volume Purchase Program (VPP) Management** > **VPP User List**.
5. Select the users from the list, and then click **Retire**.
6. Click **Close** on the **User List** screen.

Chapter 6

Updating Components

About Component Updates

In Mobile Security, the following components or files are updated through ActiveUpdate, the Trend Micro Internet-based component update feature:

- Mobile Security Server—program installation package for Mobile Security Communication Server.
- Malware Pattern—file containing thousands of malware signatures, and determines Mobile Security's ability to detect these hazardous files. Trend Micro updates pattern files regularly to ensure protection against the latest threats.
- Mobile Device Agents installation program—program installation package for the Mobile Device Agents.

Updating Mobile Security Components

You can configure scheduled or manual component updates on the Mobile Security Management Server to obtain the latest component files from the ActiveUpdate server. After a newer version of a component is downloaded on the Management Server, the Management Server automatically notifies mobile devices to update components.

Manual Update

You can perform a manual server and Mobile Device Agent update in the **Manual** tab on **Updates** screen. You should have already configured the download source in the **Source** screen (see [Specifying a Download Source on page 6-5](#) for more information).

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Updates**.
The **Updates** screen displays.
3. Click the **Manual** tab.

Updates			
Manual	Scheduled	Source	
<input type="checkbox"/> Select all			
<input type="checkbox"/> Anti-Malware Components		Current Version	Last Update
<input type="checkbox"/> Malware Pattern for Android 2.1 or Above		1.505.00	09/29/2014 19:02
<input type="checkbox"/> Agent Installation Packages (i)		Current Version	Last Upgrade
<input type="checkbox"/> Mobile Device Agent for Android 2.1 or Above		9.0.0.4041	09/29/2014 14:13
<input type="checkbox"/> Server Version		Current Version	Last Upgrade
<input type="checkbox"/> Management Server 9.0 (including Local Communication Server)		9.0.0.5076	09/29/2014 14:14
<input type="button" value="Update"/>		<input type="button" value="Reset"/>	

FIGURE 6-1. The Manual tab on Updates screen

4. Select the check box of the component you want to update. Select the **Anti-Malware Components**, **Agent Installation Packages** and/or **Server Version** check box(es) to select all components in that group. This screen also displays the current version of each component and the time the component was last updated. See *About Component Updates on page 6-2* for more information on each update component.
5. Click **Update** to start the component update process.

Scheduled Update

Scheduled updates allow you to perform regular updates without user interaction; thereby, reducing your workload. You should have already configured the download source in the **Source** screen (refer to *Specifying a Download Source on page 6-5* for more information).

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Updates**.
The **Updates** screen displays.
3. Click the **Scheduled** tab.

FIGURE 6-2. The Scheduled tab on Updates screen

4. Select the check box of the component you want to update. Select the **Anti-Malware Components**, **Agent Installation Packages** and/or **Server Version** check box(es) to select all components in that group. This screen also displays each component's current version and the time the component was last updated.
5. Under **Update Schedule**, configure the time interval to perform a server update. The options are **Hourly**, **Daily**, **Weekly**, and **Monthly**.
 - For weekly schedules, specify the day of the week (for example, Sunday, Monday, and so on.)
 - For monthly schedules, specify the day of the month (for example, the first day, or 01, of the month and so on).



Note

The **Update for a period of x hours** feature is available for the **Daily**, **Weekly**, and **Monthly** options. This means that your update will take place sometime within the x number of hours specified, following the time selected in the **Start time** field. This feature helps with load balancing on the ActiveUpdate server.

6. Click **Save** to save the settings.

Specifying a Download Source

You can set Mobile Security to use the default ActiveUpdate source or a specified download source for server update.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Updates**.

The **Updates** screen displays. For more information about the update see *Manual Update on page 6-2* or for scheduled update see *Scheduled Update on page 6-3*.

3. Click the **Source** tab.

You are here: Administration > [Updates](#)

Updates

[Manual](#) [Scheduled](#) [Source](#)

Trend Micro's ActiveUpdate server
http://mobilesecurity.activeupdate.trendmicro.com/Activeupdate/

Other update source:

Intranet location containing a copy of the current file
UNC path: \\\192.168.2.100\temp\7001\scanner\hu\Activeupdate
Username: trendscanner_hu
Password:

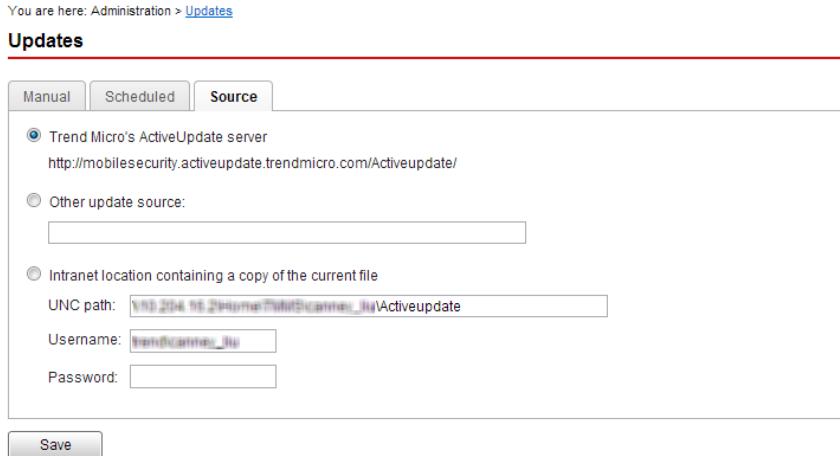


FIGURE 6-3. The Source tab on Updates screen

4. Select one of the following download sources:
 - **Trend Micro ActiveUpdate server**—the default update source.

- **Other update source**—specify HTTP or HTTPS Web site (for example, your local Intranet Web site), including the port number that should be used from where Mobile Device Agents can download updates.

**Note**

The updated components have to be available on the update source (Web server). Provide the host name or IP address, and directory (for example, <https://12.1.123.123:14943/source>).

- **Intranet location containing a copy of the current file**—the local intranet update source. Specify the following:
 - **UNC path**: type the path where the source file exists.
 - **Username** and **Password**: type the username and password if the source location requires authentication.

Manually Updating a local AU server

If the Server/Device is updated through a Local AutoUpdate Server, but the Management Server cannot connect to the Internet; then, manually update the local AU Server before doing a Server/Device Update.

Procedure

1. Obtain the installation package from your Trend Micro representative.
2. Extract the installation package.
3. Copy the folders to the local AutoUpdate Server.

**Note**

When using a local AutoUpdate Server, you should check for updates periodically.

Chapter 7

Viewing and Maintaining Logs

This chapter shows you how to view Mobile Device Agent logs on the Mobile Security administration Web console and configure log deletion settings.

The chapter includes the following sections:

- *About Mobile Device Agent Logs on page 7-2*
- *Viewing Mobile Device Agent Logs on page 7-2*
- *Log Maintenance on page 7-4*

About Mobile Device Agent Logs

When Mobile Device Agents generate a malware protection log, Web threat protection log, policy violation log or an event log, the log is sent to the Mobile Security Management Server. This enables Mobile Device Agent logs to be stored on a central location so you can assess your organization's protection policies and identify mobile devices at a higher risk of infection or attack.



Note

You can view SMS anti-spam, WAP-push protection, and call filtering logs on the mobile devices.

Viewing Mobile Device Agent Logs

You can view Mobile Device Agent logs on mobile devices or view all Mobile Device Agent logs on Mobile Security Management Server. On the Management Server, you can view the following Mobile Device Agent logs:

- **Malware Protection Log**—Mobile Device Agent generates a log when a malware is detected on the mobile device. These logs allow you to keep track of the malware that were detected and the measures taken against them.
- **Web Threat Protection Log**—Mobile Security Agent generates a log when it blocks a dangerous or malware-infected Web page, and uploads the log to server.
- **Event Log**—these logs are generated when certain actions are taken by the server and the Mobile Device Agent.
- **Policy Violation Log**—these logs include information about the policy compliant status of Mobile Device Agents.
- **Privacy Log**—Mobile Security Agent generates a log when it detects a privacy threat, and uploads the log to server.

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Notifications & Reports > Log Query**.

The **Log Query** screen displays.

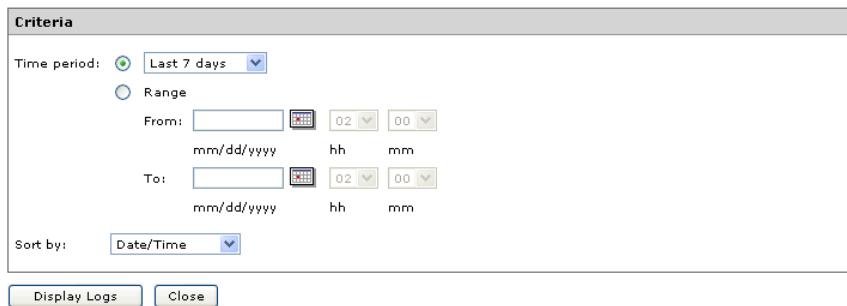


FIGURE 7-1. Log Query screen

3. Specify the query criteria for the logs you want to view. The parameters are:
 - **Log types**—select the log type from the drop down menu.
 - **Category**—select the log category from the drop down menu.
 - **Admin name**—type the administrator name whose generated logs you want to search.
 - **Time period**—select a predefined date range. Choices are: **All**, **Last 24 hours**, **Last 7 days**, and **Last 30 days**. If the period you require is not covered by the above options, select **Range** and specify a date range.
 - **From**—type the date for the earliest log you want to view. Click the icon to select a date from the calendar.
 - **To**—type the date for the latest log you want to view. Click the icon to select a date from the calendar.
 - **Sort by**—specify the order and grouping of the logs.
4. Click **Query** to begin the query.

Log Maintenance

When Mobile Device Agents generate event logs about security risk detection, the logs are sent and stored on the Mobile Security Management Module. Use these logs to assess your organization's protection policies and identify mobile devices that face a higher risk of infection or attack.

To keep the size of your Mobile Device Agent logs from occupying too much space on your hard disk, delete the logs manually or configure Mobile Security administration Web console to delete the logs automatically based on a schedule in the Log Maintenance screen.

Scheduling Log Deleting

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Notifications & Reports > Log Maintenance**.
The **Log Maintenance** screen displays.
3. Select **Enable scheduled deletion of logs**.
4. Select the log types to delete: Malware, Event or Policy Violation.
5. Select whether to delete logs for all the selected log types or those older than the specified number of days.
6. Specify the log deletion frequency and time.
7. Click **Save**.

Deleting Logs Manually

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Notifications & Reports > Log Maintenance**.
The **Log Maintenance** screen displays.
3. Select the log types to delete.
4. Select whether to delete logs for all the selected log types or only older than the specified number of days.
5. Click **Delete Now**.

Chapter 8

Using Notifications and Reports

This chapter shows you how to configure and use notifications and reports in Mobile Security.

The chapter includes the following sections:

- *About Notification Messages and Reports on page 8-2*
- *Configuring Notification Settings on page 8-2*
- *Configuring Email Notifications on page 8-2*
- *Administrator Notifications and Scheduled Reports on page 8-3*
- *User Notification on page 8-5*

About Notification Messages and Reports

You can configure Mobile Security to send notifications via email to the administrator(s) and/or users.

- **Administrator Notifications & Reports**—sends email notifications and reports to the administrator in case any system abnormality occurs.
- **User Notifications**—sends email and/or a text message to notify mobile devices to download and install Mobile Device Agent.

Configuring Notification Settings

Configuring Email Notifications

If you want to send email message notifications to the users, then you must configure these settings.

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Notifications & Reports > Settings**.
The **Notifications & Reports Settings** screen displays.
3. Under **Email Settings** section, type the **From** email address, the SMTP server IP address and its port number.
4. If the SMTP server requires authentication, select **Authentication**, and then type the username and password.
5. Click **Save**.

Administrator Notifications and Scheduled Reports

Use the **Administrator Notifications & Reports** screen to configure the following:

- Notifications:
 - **System Error**—sends email notification to the administrator in case any system abnormality occurs. Token variables <%PROBLEM%>, <%REASON%> and <%SUGGESTION%> will be replaced by the actual problem, reason and the suggestion to resolve the problem.
 - **Deactivated Device Administrator for Mobile Security**—sends email notification to administrator when Mobile Security is disabled in the **Device administrators** list on any Android mobile device. Token variable <%DEVICE%> will be replaced by the mobile device's name in the email.
 - **APNS Certificate Expired Warning**—sends email notification to administrator one month before the APNs certificate expires.
 - **Malware Scan Realitime Log**—sends email notification to administrator when the agent detects a malware.
 - **VPP Token Expiry Warning**—sends email notification to administrator 15 days before the VPP token expires.
 - **DEP Token Expiry Warning**—sends email notification to administrator 15 days before the DEP token expires.
- Reports:
 - **Devices Inventory Report**—is the comprehensive report of all the mobile devices managed by Mobile Security.
 - **Compliance Violation Report**—is the report of all the mobile devices managed by Mobile Security that do not comply with the configured policy.
 - **Malware Detection Report**—is the report of all the security threats detected on mobile devices managed by Mobile Security.
 - **Web Threat Protection Report**—is the report of all the unsafe URLs accessed on mobile devices managed by Mobile Security.

- **Application Inventory Report**—is the report of all the apps installed on mobile devices managed by Mobile Security.
- **Devices Enrollment Report**—is the report of mobile devices enrollment information managed by Mobile Security.
- **Devices Decommission Report**—is the report of mobile devices decommission information managed by Mobile Security.
- **Policy Violation Report**—is the report of mobile devices that violate the security policies.

Configuring Administrator Notifications

Procedure

1. Log on to the Mobile Security administration Web console.

2. Click **Notifications & Reports > Settings**.

The **Notifications & Reports Settings** screen displays.

3. Select the notifications and reports you want to receive via email, and then click on individual notifications and reports to modify their contents.



Note

When you select reports that you want to receive, you can also adjust their frequencies individually from the drop-down list after each report.



Note

While editing the **Message** field in email notification messages, make sure to include the token variables <%PROBLEM%>, <%REASON%> and <%SUGGESTION%>, which will be replaced by the actual values in the email message.

4. Click **Save** when done, to return back to the **Administrator Notifications & Reports** screen.

User Notification

Use the **User Notifications** screen to configure the following email message notification:

- **Mobile Device Enrollment**—sends email and/or a text message to notify mobile devices to download and install Mobile Device Agent. Token variable <%DOWNLOADURL%> will be replaced by the actual URL of the setup package.
- **Policy Violation**—sends email notification to mobile devices if the compliance criteria is not met. Token variables <%DEVICE%> and <%VIOLATION%> will be replaced by the mobile device's name in the email, and the policies that it violates.
- **VPP User Notification**—sends email notification to a mobile device when administrator assigns a VPP app to a user.

Configuring User Notifications

Procedure

1. Log on to the Mobile Security administration Web console.
2. Click **Notifications & Reports > Settings**.
The **Notifications & Reports Settings** screen displays.
3. Select the notifications you want to send to user via email or text message, and then click on individual notifications to modify their contents.
 - To configure email notification messages, update the following details as required:
 - **Subject:** The subject of the email message.
 - **Message:** The body of the email message.
 - To configure text notification messages, update the body of the message in the **Message** field.
4. Click **Save** when done, to return back to the **User Notifications** screen.

Chapter 9

Troubleshooting and Contacting Technical Support

Here you will find answers to frequently asked questions and you learn how to obtain additional Mobile Security information.

The chapter includes the following sections:

- *[Troubleshooting on page 9-2](#)*
- *[Before Contacting Technical Support on page 9-5](#)*
- *[Contacting Technical Support on page 9-5](#)*
- *[Sending Infected Files to Trend Micro on page 9-6](#)*
- *[TrendLabs on page 9-6](#)*
- *[About Software Updates on page 9-7](#)*
- *[Other Useful Resources on page 9-8](#)*
- *[About Trend Micro on page 9-8](#)*

Troubleshooting

This section provides tips for dealing with issues you may encounter when using Mobile Security.

- **User cannot input nanoscale passwords on their devices.**

Mobile device keypads can only support a certain set of characters. Mobile Security recommends that the administrator compile a list of characters supported by the devices. After compiling the list of supported characters, the administrator can then set the uninstall protection password from the management console using the list of supported characters.

- **After canceling the Communication Server uninstallation process, the Communication Server fails to function normally.**

If the uninstallation process started deleting the files and services that are important for the Communication Server's normal operation before the process was stopped, the Communication Server may not function normally. To resolve this issue, install and configure the Communication Server again.

- **iOS mobile devices cannot enroll successfully to the Management Server, and displays "Unsupported URL" error message.**

This issue may happen if the system clock of SCEP server is set to the incorrect time or the Simple Certificate Enrollment Protocol (SCEP) certificate is not obtained by Trend Micro Mobile Security. Make sure that the system clock of SCEP server is set to the correct time. If the issue persists, perform the following steps:

1. Log on to the Mobile Security administration Web console.
2. Click **Administration > Communication Server** Settings.
3. Without changing the settings, click **Save**.

- **Unable to save Database Settings if you use SQL Server Express.**

If you are using SQL Server Express, use the following format in the Server address field: `<SQL Server Express IP address>\sqlexpress`.

**Note**

Replace <SQL Server Express IP address> with the IP address of SQL Server Express.

- **Unable to connect to SQL Server 2005 or SQL Server 2005 Express.**

This problem may occur when SQL Server 2005 is not configured to accept remote connections. By default, SQL Server 2005 Express Edition and SQL Server 2005 Developer Edition do not allow remote connections. To configure SQL Server 2005 to allow remote connections, complete all the following steps:

1. Enable remote connections on the instance of SQL Server that you want to connect to from a remote computer.
2. Turn on the SQL Server Browser service.
3. Configure the firewall to allow network traffic that is related to SQL Server and to the SQL Server Browser service.

- **Unable to connect to SQL Server 2008 R2.**

This problem may occur if Visual Studio 2008 is not installed in the default location and therefore, the SQL Server 2008 setup cannot find devenv.exe.config configuration file. To resolve this issue, perform the following steps:

1. Go to <Visual Studio installation folder>\Microsoft Visual Studio 9.0\Common7\IDE folder, find and copy devenv.exe.config file and paste it to the following folder (you may need to enable display extensions for known file types in folder options):

- For 64-bit Operating System:

C:\Program Files (x86)\Microsoft Visual Studio 9.0\Common7\IDE

- For 32-bit Operating System:

C:\Program Files\Microsoft Visual Studio 9.0\Common7\IDE

2. Run the SQL Server 2008 setup again and add BIDS feature to the existing instance of SQL Server 2008.

- **Unable to export the client device list in Device Management.**

This may occur if the downloading of encrypted files is disabled in the Internet Explorer. Perform the following steps to enable the encrypted files download:

1. On your Internet Explorer, go to **Tools > Internet options**, and then click the **Advanced** tab on the **Internet Options** window.
2. Under **Security** section, clear **Do not save encrypted pages to disk**.
3. Click **OK**.

- **The status of certain Android mobile device is always Out of Sync.**

This is because the Mobile Security device administrator is not activated on that mobile device. If the user does not activate Mobile Security in the Device administrators list, then the Mobile Security cannot synchronize server policies with the mobile device, and displays its status as Out of Sync.

- **The content on the Policy pop-up window does not display and is blocked by Internet Explorer.**

This happens if your Internet Explorer is configured to use a .pac automatic configuration file. In that case, the Internet Explorer will block the access to a secure Web site that contains multiple frames. To resolve this issue, add the Mobile Security Management Server address to the Trusted sites security zone in Internet Explorer. To do this, perform the following steps:

1. Start Internet Explorer.
2. Go to **Tools > Internet options**.
3. On the **Security** tab, click **Trusted sites**, and then click **Sites**.
4. In the **Add this Web site to the zone** text field, type the Mobile Security Management Server URL, and then click **Add**.
5. Click **OK**.

For more details on this issue, refer to the following URL:

<http://support.microsoft.com/kb/908356>

Before Contacting Technical Support

Before contacting technical support, here are two things you can quickly do to try and find a solution to your problem:

- **Check your documentation**—The manual and online help provide comprehensive information about Mobile Security. Search both documents to see if they contain your solution.
- **Visit our Technical Support Web site**—Our Technical Support Web site, called Knowledge Base, contains the latest information about all Trend Micro products. The support Web site has answers to previous user inquiries.

To search the Knowledge Base, visit

<http://esupport.trendmicro.com>

Contacting Technical Support

Trend Micro provides technical support, pattern downloads, and program updates for one year to all registered users, after which you must purchase renewal maintenance. If you need help or just have a question, please feel free to contact us. We also welcome your comments.

- Get a list of the worldwide support offices at <http://esupport.trendmicro.com>
- Get the latest Trend Micro product documentation at <http://docs.trendmicro.com>

In the United States, you can reach the Trend Micro representatives through phone, fax, or email:

Trend Micro, Inc.
10101 North De Anza Blvd.,
Cupertino, CA 95014
Toll free: +1 (800) 228-5651 (sales)
Voice: +1 (408) 257-1500 (main)
Fax: +1 (408) 257-2003
Web address: <http://www.trendmicro.com>
Email: support@trendmicro.com

Sending Infected Files to Trend Micro

You can send malware and other infected files to Trend Micro. More specifically, if you have a file that you think is some kind of malware but the scan engine is not detecting it or cleaning it, you can submit the suspicious file to Trend Micro using the following address:

<http://esupport.trendmicro.com/srf/srfmain.aspx>

Please include in the message text a brief description of the symptoms you are experiencing. Our team of malware engineers will “dissect” the file to identify and characterize any malware it may contain and return the cleaned file to you, usually within 48 hours.

TrendLabs

Trend Micro TrendLabsSM is a global network of antivirus research and product support centers providing continuous, 24 x 7 coverage to Trend Micro customers worldwide.

Staffed by a team of more than 250 engineers and skilled support personnel, the TrendLabs dedicated service centers worldwide ensure rapid response to any virus outbreak or urgent customer support issue, anywhere in the world.

The TrendLabs modern headquarters earned ISO 9002 certification for its quality management procedures in 2000. TrendLabs is one of the first antivirus research and support facilities to be so accredited. Trend Micro believes that TrendLabs is the leading service and support team in the antivirus industry.

For more information about TrendLabs, please visit:

<http://us.trendmicro.com/us/about/company/trendlabs/>

About Software Updates

After a product release, Trend Micro often develops updates to the software, to enhance product performance, add new features, or address a known issue. There are different types of updates, depending on the reason for issuing the update.

The following is a summary of the items Trend Micro may release:

- **Hot fix**—A hot fix is a workaround or solution to a single customer-reported issue. Hot fixes are issue-specific, and therefore not released to all customers. Windows hot fixes include a Setup program, while non-Windows hot fixes do not (typically you need to stop the program daemons, copy the file to overwrite its counterpart in your installation, and restart the daemons).
- **Security Patch**—A security patch is a hot fix focusing on security issues that is suitable for deployment to all customers. Windows security patches include a Setup program, while non-Windows patches commonly have a setup script.
- **Patch**—A patch is a group of hot fixes and security patches that solve multiple program issues. Trend Micro makes patches available on a regular basis. Windows patches include a Setup program, while non-Windows patches commonly have a setup script.
- **Service Pack**—A service pack is a consolidation of hot fixes, patches, and feature enhancements significant enough to be considered a product upgrade. Both Windows and non-Windows service packs include a Setup program and setup script.

Check the Trend Micro Knowledge Base to search for released hot fixes:

<http://esupport.trendmicro.com>

Consult the Trend Micro Web site regularly to download patches and service packs:

<http://www.trendmicro.com/download>

All releases include a readme file with the information needed to install, deploy, and configure your product. Read the readme file carefully before installing the hot fix, patch, or service pack file(s).

Known Issues

Known issues are features in Mobile Security that may temporarily require a workaround. Known issues are typically documented in the Readme document you received with your product. Readmes for Trend Micro products can also be found in the Trend Micro Download Center:

<http://www.trendmicro.com/download/>

Known issues can be found in the technical support Knowledge Base:

<http://esupport.trendmicro.com>

Trend Micro recommends that you always check the Readme text for information on known issues that could affect installation or performance, as well as a description of what's new in a particular release, system requirements, and other tips.

Other Useful Resources

Mobile Security offers a host of services through its Web site, <http://www.trendmicro.com>.

Internet-based tools and services include:

- Virus Map— monitor malware incidents around the world
- Virus risk assessment— the Trend Micro online malware protection assessment program for corporate networks.

About Trend Micro

Management Server, Inc. is a global leader in network anti-malware and Internet content security software and services. Founded in 1988, Trend Micro led the migration of malware protection from the desktop to the network server and the Internet gateway—gaining a reputation for vision and technological innovation along the way.

Today, Trend Micro focuses on providing customers with comprehensive security strategies to manage the impacts of risks to information, by offering centrally controlled

server-based malware protection and content-filtering products and services. By protecting information that flows through Internet gateways, email servers, and file servers, Trend Micro allows companies and service providers worldwide to stop malware and other malicious code from a central point, before they ever reach the desktop.

For more information, or to download evaluation copies of Trend Micro products, visit our award-winning Web site:

<http://www.trendmicro.com>

Index

A

- administration Web console, 2-2, 2-4
 - operations, 2-2
 - URL, 2-2
 - username and password, 2-3
- Administrator Reports download, 1-14
- advanced search, 1-10
- agent customization, 1-15
- anti-malware scanning, 1-19
- application control, 1-14, 1-16
- application inventory, 1-16
- application push, 1-16
- authentication based on device identity, 1-15

B

- BlackBerry, 1-9

C

- call filtering, 1-20
 - filtering list configuration, 4-17
 - filtering list format, 4-18
 - policies, 1-18
- clearing corporate data on mobile devices, 3-15
- command queue, 1-11
- command statuses, 2-18
- Compatibility View, 2-4
- compliance check, 1-16
- compliance policy
 - check list, 4-20
- component updates
 - about, 6-2
 - download sources, 6-5
 - local AU server, 6-6
 - manual, 6-2

scheduled, 6-3

control manager, 1-12

Control Manager integration, 1-12

corporate certificates, 1-11-1-13

customizable enrollment URL, 1-15

D

Dashboard

- application control status, 2-7
- encryption status, 2-7
- information management, 1-13
- jailbreak/root status, 2-7
- mobile device status, 2-5
- patch and component update status, 2-6
- screen, 1-17
- server update status, 2-6

data security improvement, 1-12

device enrollment, 1-10

device information, 1-10

device status, 1-11

device tree, 1-10

E

enhanced event logs, 1-15

enterprise app store, 1-10, 1-11, 1-17

about, 5-2

event log, 1-10

Exchange ActiveSync Devices tab, 3-24

Exchange Connector, 1-12

Exchange Server integration, 1-13

export log, 1-10

F

Facebook Scan, 1-7

Full license version, 2-4

G

General Policy

- log settings, 4-9
- uninstall protection features, 4-8
- update settings, 4-9

Google Play, 1-7

H

HTTP(S) push notification setting, 1-16

I

integrated with Active Directory, 1-17

Invited Devices tab, 3-21

- invitation email information, 3-21
- invitation statuses, 3-22

iOS device provisioning, 1-12, 1-13

iOS management, 1-9, 1-11

IPv6 support, 1-12

K

Knowledge Base, 9-5

known issues, 9-8

L

latest documentation, 9-5

locate iOS mobile devices, 1-7

locating remote device, 1-18

location awareness, 1-7

locking a mobile device, 3-14

lock policy enhancement, 1-14

M

Malware Protection Policy

- scan options, 4-13
- scan types, 4-13

Managed Devices tab, 3-3

MARS, 1-8, 1-14

MDA logs

about, 7-2

Event Log, 7-2

log types, 7-2

Malware Protection Log, 7-2

manual deletion, 7-4

Policy Violation Log, 7-2

Privacy Log, 7-2

query criteria, 7-3

scheduled deletion, 7-4

Web Threat Protection Log, 7-2

mobile device authentication, 1-20

mobile device enrollment, 1-14

Mobile Security

about, 1-2

Active Directory, 1-5

architecture, 1-2

Basic Security Model, 1-3

certificate

APNs certificate, 1-5

authority, 1-5

management, 2-21

public and private keys, 1-5

SCEP, 1-5

security credentials, 1-5

SSL certificate, 1-6

Cloud Communication Server, 1-4

communication methods, 1-2

Communication Server, 1-4

Communication Server types, 1-4

components, 1-3

deployment models, 1-3

encryption software compatibility, 1-2

Enhanced Security Model

Cloud Communication Server, 1-3

Local Communication Server, 1-3

Exchange Connector, 1-4

Local Communication Server, 1-4
 Management Server, 1-3
 Microsoft SQL Server, 1-5
 Mobile Device Agent, 1-5
 OfficeScan, 1-2
 SMTP server, 1-6
 sub-groups, 3-3
 unwanted network communications, 1-2
 mobile threats, 1-2
 spam messages, 1-2
 multiple administrator accounts, 1-13

N
 notifications and reports
 about, 8-2
 email message configuration, 8-5
 notifications, 8-3
 reports, 8-3
 token variables, 8-5

O
 OfficeScan, 1-13
 optional authentication, 1-16
 optional Cloud Communication Server, 1-13

P
 password
 reset password, 1-17, 3-17
 uninstall protection, 9-2
 password protection, 1-9
 per-app VPN, 1-12
 Policy Violation Log, 1-14
 privacy scan, 1-7
 provisioning policy, 1-18

Q
 QR-code, 1-14

Quick Configuration Verification screen, 1-17

R
 regular updates, 1-20
 resources
 Internet-based tools and services, 9-8
 risk evaluation, 1-8
 root account properties, 2-11

S
 Samsung KNOX, 1-10
 scan after pattern update, 1-16
 Scan from Cloud, 1-7
 scheduled reports, 1-17
 SD card restriction, 1-16
 security scan, 1-7
 selective wipe, 1-16
 send email alert, 4-22
 server command confirmation, 1-14
 simple iOS client, 1-15
 simpler provisioning, 1-16
 single sign-on, 1-12
 SMS anti-spam, 1-19
 SMS sender, 1-7, 1-9
 software update
 about, 9-7
 readme file, 9-7
 release items, 9-7
 spam
 SMS, 4-14
 filtering list configuration, 4-14
 filtering list format, 4-15
 WAP-Push, 4-15
 approved list format, 4-16
 standalone management server, 1-13
 Super Administrator role properties, 2-11

supervised device management, 1-13
support for Android mobile devices, 1-18
support for Blackberry mobile devices, 1-17
support for iOS mobile devices, 1-17
Symbian, 1-11

T

Technical Support Web site, 9-5
template, 1-7
template-based policies, 1-13
TrendLabs, 9-6
Trend Micro
 about, 9-8
troubleshooting tips, 9-2
 .pac automatic configuration file, 9-4
 client device list, 9-4
 Communication Server, 9-2
 devenv.exe.config configuration file, 9-3
 Out of Sync, 9-4
 SCEP certificate, 9-2
 SQL Server 2005, 9-3
 SQL Server 2008 R2, 9-3
 SQL Server Express, 9-2
 system clock, 9-2

U

Unmanaged group for Android and iOS, 1-15
updated architecture, 1-17, 1-18
updated device statuses, 1-13
updated feature locking, 1-18
updated MDA interface, 1-14
user account details, 2-14

V

Volume Purchase Program, 1-14

W

WAP-Push protection, 1-20

Web proxy support, 1-15
Web security, 1-19
Web threat protection, 1-12
Web threat protection policy, 1-16
what's new
 7.0, 1-18
 7.1, 1-17
 8.0, 1-15
 8.0 SP1, 1-15
 v9.0, 1-13
 v9.0 SP1, 1-12
 v9.0 SP2, 1-10
 v9.1, 1-9
 v9.2, 1-7
 v9.3, 1-6
widgets, 1-12, 1-13
Wi-Fi hotspot, 1-12
Windows Mobile, 1-11
Windows Phone, 1-10
worldwide support offices, 9-5

**TREND MICRO INCORPORATED**

225 E. John Carpenter Freeway, Suite 1500
Irving, Texas 75062 U.S.A.
Phone: +1 (817) 569-8900, Toll-free: (888) 762-8736
Email: support@trendmicro.com

www.trendmicro.com

Item Code: TSEM97009/150623