


# TREND MICRO™ Deep Discovery Email Inspector 7100 Quick Start Guide

Deep Discovery Email Inspector stops sophisticated targeted attacks and cyber threats by scanning, simulating, and analyzing suspicious links and attachments in email messages before they can threaten your network. Designed to integrate into your existing anti-spam/antivirus network topology, Deep Discovery Email Inspector can act as a Mail Transfer Agent in the mail traffic flow or as an out-of-band appliance silently monitoring your network for cyber threats.


## 1 Opening and Inspecting the Carton

Verify that the Deep Discovery Email Inspector carton contains the following items:

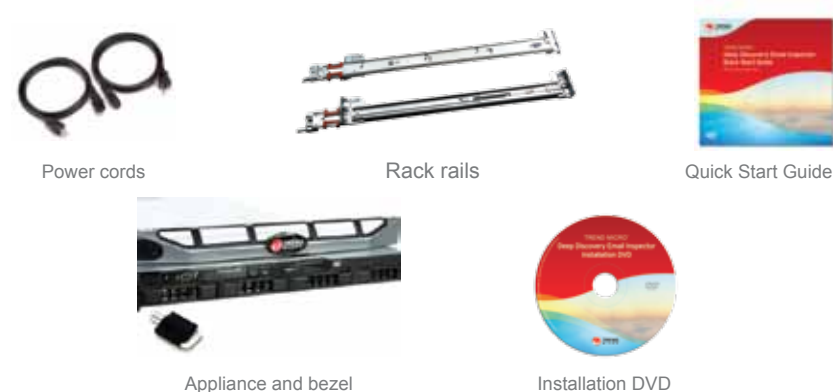


## 2 Examining the Deep Discovery Email Inspector Appliance

The power button is behind the bezel. Remove the bezel for the initial configuration and then re-attach it when finished.

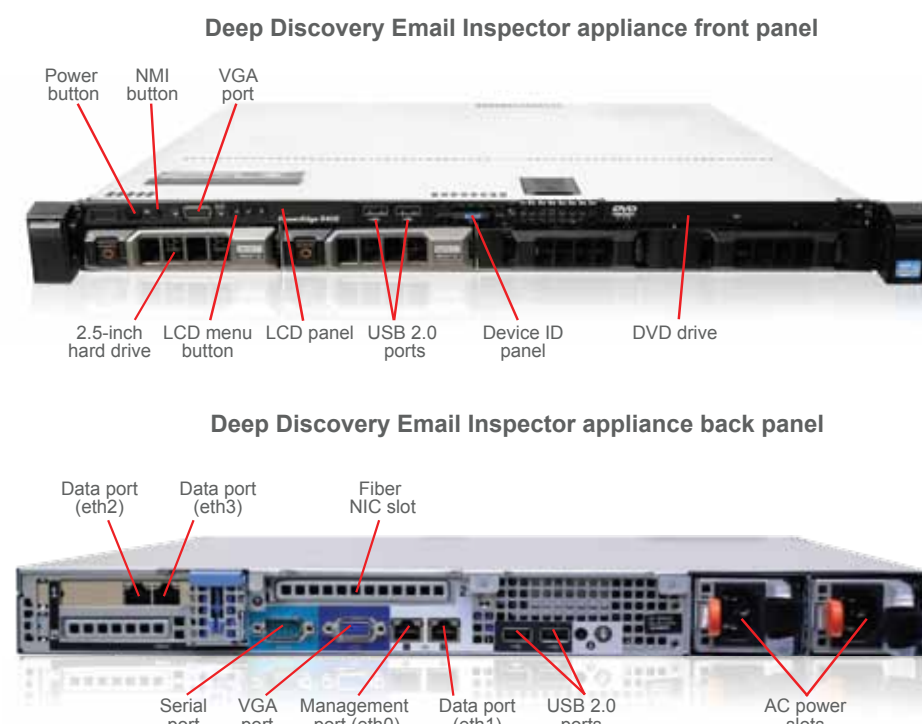

**Note:** Your device comes with the Copper Ethernet NIC. If your purchase includes the optional Fiber Ethernet NIC, plug it to the appliance through the Fiber NIC slot.

## 3 Recommended Network Configuration

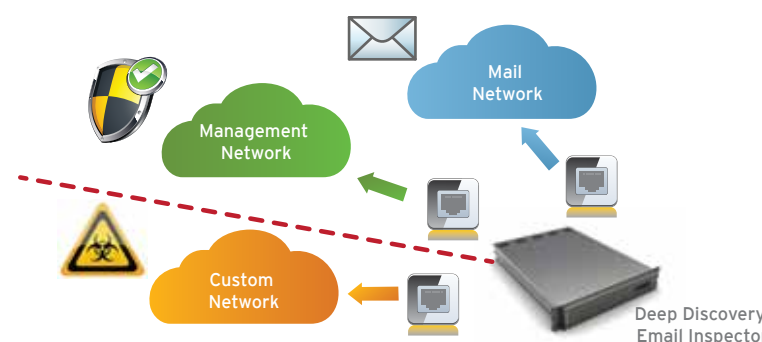

Custom network	The custom network handles sandbox analysis. The custom network should be an isolated network without a proxy or connection restrictions so that malicious samples do not affect other networks. Use any available data port (eth1, eth2, eth3) that is not configured for mail routing.
Management Network	The management network handles the management console, SSH connections, and Trend Micro updates. Mail traffic can also pass through the management network. Use only the management port (eth0).
Mail Network	(Optional) The mail network handles mail routing. Use any available data port (eth1, eth2, eth3) that is not configured for the custom network.

## 4 Deployment Checklist

Requirement	Details
Activation Code	Obtain from Trend Micro
Monitor and VGA cable	Connects to the VGA port of the appliance
USB keyboard	Connects to the USB port of the appliance
USB mouse	Connects to the USB port of the appliance
Ethernet cables	Connect to the management and data ports. <b>Required:</b> Management port (eth0) connects to the management network. <b>Recommended:</b> Data port (eth1, eth2, or eth3) connects to the custom network. <b>Optional:</b> Unused data ports connect to the mail network for mail routing.
IP addresses	<b>Required:</b> One IP address for the management network. <b>Recommended:</b> Two IP addresses for the custom network. <b>Optional:</b> Two IP addresses for the mail network.
Internet-enabled computer	A computer that has the following software installed: - A supported web browser: - Internet Explorer™ 9, 10, 11 - Firefox™ 24 - Google™ Chrome 32 - Adobe™ Flash™ 10 or later

## 5 Setting Up the Hardware

1. Mount the Deep Discovery Email Inspector appliance in a standard 19-inch 4-post rack, or on a free-standing object, such as a sturdy desktop.

**Note:** When mounting the appliance, leave at least two inches of clearance on all sides for proper ventilation and cooling.

2. Connect the appliance to a power source.
3. Connect the monitor to the VGA port at the front of the appliance.
4. Connect the keyboard and mouse to the USB ports at the front of the appliance.
5. Power on the appliance.

## 6 Performing the Initial Configuration

Configure network settings in the Command Line Interface to gain access to the management console.

**Note:** For information about connecting through SSH, see the Administrator's Guide.

1. Log on to the Command Line Interface with the default credentials.
  - User name: admin
  - Password: ddei
2. Type "enable" (no quotes) and then press **Enter**.
3. Type the default password, "trend#1" (no quotes), and then press **Enter**. The prompt changes from > to #.
4. Configure network settings with the following command:  
`configure network basic`
5. Specify network settings and press **Enter** after typing each setting.
  - Host name
  - IP address
  - Subnet mask
  - Gateway
  - Preferred DNS
  - Alternate DNS
6. Type **Y** to confirm settings and restart.

Deep Discovery Email Inspector implements specified network settings and restarts all services. The initial configuration is complete and the management console is accessible.

## 7 Accessing the Management Console

1. From a supported web browser, open the management console at:  
`https://{appliance_IP_address}`  
**Note:** Use the IP address configured in the initial configuration (Step 5). The default IP address is 192.168.252.1.
2. If an error appears indicating that the certificate was issued from a different web address, click **Continue** to proceed.
3. Specify the default credentials.
  - a) User name: admin
  - b) Password: ddei
4. Click **Log On**.  
The management console dashboard appears. For additional configuration procedures, see the Getting Started chapter in the Administrator's Guide.  
Download the document at:  
<http://docs.trendmicro.com/en-us/enterprise/deep-discovery-email-inspector.aspx>

## 8 Contact Information

Website:  
<http://www.trendmicro.com>  
List of worldwide offices and phone numbers:  
<http://www.trendmicro.com/us/about-us/contact/index.html>

© 2014 Trend Micro Incorporated. All Rights Reserved. Trend Micro, Control Manager, and the t-ball logo are trademarks or registered trademarks of Trend Micro Incorporated. All other company and/or product names may be trademarks or registered trademarks of their owners. Information contained in this document is subject to change without notice.